




REMOVE PRESSURE FROM CONTAINER BEFORE LOGISINING CLIMP RING ON DRIM COVER.
PLEASE CHECK FOR DIMANE TO THIS EQUIPMENT — DAMAGE MUST BE MOTED ON THE FREIGHT BILL AT
FROM THE COMPREY. THIS EQUIPMENT HAS BEEN CLEANED WITH CLEANING AGENTS AND MAY HAVE RESIDUE LEFT IN THE UNIT. PLEASE CHECK THE UNIT CAREFULLY BEFORE FILLING. FINAL CLEANING MAY BE REQUIRED.





DRUM NECK SECTION

SCALE: NONE SCALE: NONE

NOTE: IF APPLICABLE, PER TITLE 49CFR, BOTH THE 22 1/2" CLOSURE CLAMP RING, BOLT, NUT AND THE 2" BUNG PLUG MUST BE TIGHTENED TO A TORQUE OF 30 Ft.-Ibs. TO SATISFY THE PERFORMANCE REQUIREMENTS.

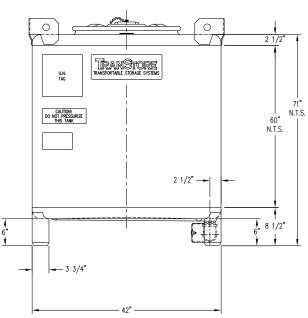

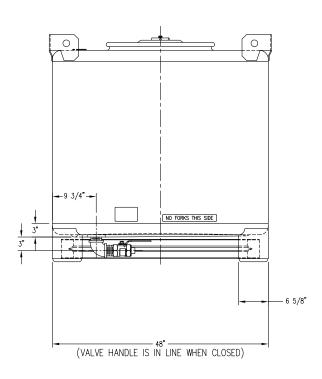



NOTE: BOTTOM SUMP SLOPES 1/2" TOWARDS OPENING

NOTES:

- 1. REMOVE ALL BURRS AND SHARP EDGES.
- 2. TANK FABRICATED W/2" RADIUS CORNERS AND HIGH CONTOUR LEGS.
- 3. MATERIAL OF CONSTRUCTION IS 304 S.S. AND NOTED.
- 4. INSIDE OF TANK TO BE WIPED CLEAN AT FINAL ASS'Y.
- 5. WARRANTY TAG TO BE WIRED TO CLAMP RING AT FINAL ASS'Y.



P.O. Box 240072 8700 West Bradley Road Milwaukee, WI 53224

800-333-3331 PHONE 800·563·8848 **FAX**

info@jmesales.com E-MAIL www.JMEsales.com WEB