

PETRO INDUSTRIAL



petroind.com



RESERVOIR AIR DRYER

Item code: P575852

The Donaldson Reservoir Air Dryer eliminates the need to continually replace conventional desiccant breathers, enhancing reservoir breathing systems by continuously purging and dehydrating reservoir headspace.

With no electrical requirements, the Donaldson Reservoir Air Dryer combats ambient ingress of moisture by introducing a steady stream of clean, dry air to the reservoir.

This constant airflow helps sustain optimal conditions and prevents the formation of condensation and rust in the reservoir, minimizing the potential for particulate and water ingress through reservoir access points.

When combined with a T.R.A.P. Breather, the complete system keeps moisture and contamination out, even if fluid flow rate out of the tank surpasses the Reservoir Air Dryer flow rate into the tank.

FEATURES:

- The clean, dry air sweep dehydrates the reservoir headspace and removes dissolved moisture from exposed oils and fuels*.
- Operates with standard plant air; instrument quality air is not required.
- Submicron coalescing air filter collects oil and water droplets and fine particles from inlet air.
- Visual indicator monitors filter condition.
- Automatic drain purges captured liquid with no intervention required.
- Membrane air dryer reduces plant air dew point by as much as 150 °F (83 °C).
- Pressure regulator depressurizes the air and ensures that the proper flow rate of air is introduced into the reservoir.

APPLICATIONS:

- Lubricant system reservoirs.
- Diesel storage tanks.
- Oil storage tanks.
- Gear boxes.
- Hydraulic system reservoirs.



PETRO INDUSTRIAL



petroind.com



SPECIFICATIONS:

Efficiency: Reduces dew point as much as 150 °F (83 °C)

Outlet Flow Volume @ 100 psi and dew point suppression: 0.5 scfm (14.2 slpm) maximum

Inlet Air required @ 100 psi: 0.8 scfm (22.7 slpm) maximum

Pre-Filter Condition: Visual Indicator (Green/Red)

Pressure Regulator: Dial Gauge

Coalescer Drain: Automatic Float Type

Max Working Pressure: 116 psi (800 kPa / 8.00 bar)

Max Operating Temperature: 125°F (52°C)

Fluid Compatibility: Petroleum and Phosphate Ester Fluids, Diesel Fuels*



Inlet/Outlet Connection: 1/4" NPT

Mounting Bracket: 3/8" - 16 UN Threaded Nut

Weight: <5 lbs (<3 kgs)

Replacement: Coalescing Pre-Filter

**The Reservoir Air Dryer is not recommended for use on gasoline holding tanks or for the head space of any flammable liquid (Flash Point of 100F/38C)*

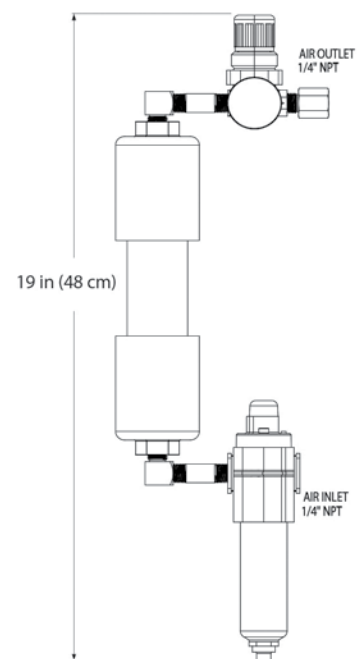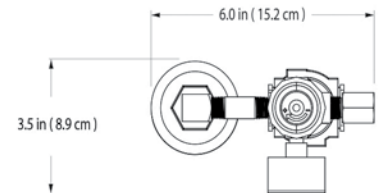

PETRO Contact Information

AFRICA

South Africa

Factory 1 - 16 Bentonite Street
Alrode, Alberton, Johannesburg
South Africa
P: +27 (0)11 864 7758
F: +27 (0) 11 864 1649
E: sales@petroindustrial.co.za

AUSTRALIA

Eastern Australia

Factory 2, 106 Potassium Street
PO Box 407
Narangba QLD 4504
P: 07 3204 9558
F: 07 3293 4852
E: sales@petroindustrial.com.au

UAE

Dubai

Office LB17330, Lobby Building 17
Jebel Ali Free Zone
PO Box 18602
Dubai, United Arab Emirates
P: +971 488 76688
F: +971 488 76932
E: salesuae@petroind.com

Western Australia

2 Competition Way
Wangara WA 6065
P: 08 6305 0855
F: 08 6305 0319
E: sales@petroindustrial.com.au

PETRO INDUSTRIAL



petroind.com