

XS[®] E85 Nozzles



Pressure activated, automatic shut off nozzle for full-service, self-service and unattended stations.

- XS[®] E85 Nozzle shuts off when
 - the pump shuts off.
 - the gas tank is full.
 - the lever is opened before the pump is turned on.
 - the leak detector has not completed the test cycle.
- Aluminum body, spout, and internal parts are nickel plated to prevent contamination and corrosion from Ethanol blends.
- *StreamShaper*[®] reduces turbulence for straighter fuel flow and less splash back spillage.
- Compatible with unleaded and all Ethanol blends through E-100.
- Nozzle comes with smooth Full Grip Guard
- Aluminum reinforced spout bushing keeps the spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop[®] device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- All seals are UL approved fluorocarbon compounds to prevent deterioration from Ethanol blends.
- New poppet seal design improves flow control and provides enhanced endurance over time.




New Unleaded Nozzles

| MODEL NO. | DESCRIPTION | SHIPPING WEIGHT LBS (KG) |
|-----------|--|--------------------------|
| 659504 | with Three Notch Hold Open Clip | 3.0 (1.3) |
| 659559 | with Three Notch Hold Open Clip and Waffle Splash Guard | 2.9 (1.3) |
| ^659544 | with Three Notch Hold Open Clip, Waffle Splash Guard & Flo-Equalizer [®] | 3.0 (1.3) |
| ^659554 | with Three Notch Hold Open Clip and Flo-Equalizer [®] | 2.9 (1.3) |
| 659589 | with Three Notch Hold Open Clip, POPD [®] Full Grip Guard and Waffle Splash Guard | 3.0 (1.3) |
| 659595 | with Three Notch Hold Open Clip, POPD [®] S Full Grip Guard and Waffle Splash Guard | 3.0 (1.3) |
| ^6595100 | with Three Notch Hold Open Clip, POPD [®] Full Grip Guard, Waffle Splash Guard and Sightglass | 3.0 (1.3) |

Construction

| | |
|---------|--|
| Body | One piece die cast aluminum with Electroless Nickel Plating |
| Seals | Fluorocarbon |
| Packing | Double O-ring seal protected by fiber reinforced Teflon [®] |
| Lever | One piece contoured steel with hard plastic cover. |
| Inlet | 3/4" / 19 mm NPT |

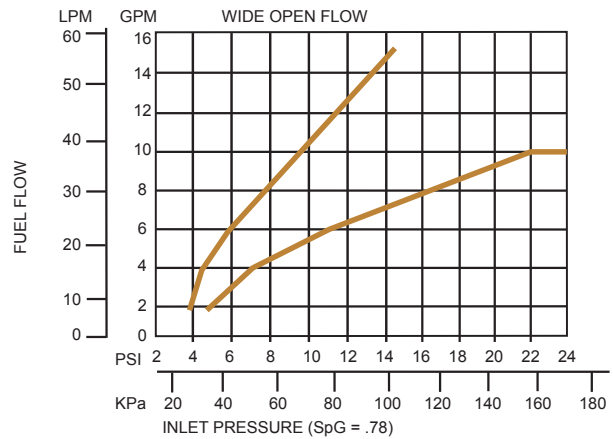

^ NOT UL LISTED

XS[®]

E85 Nozzles

Pressure activated, automatic shut off nozzle for full-service, self-service and unattended stations.

Dimensions and System Options

Safe-T-Breaks[®]

| MODEL NO. | DESCRIPTION |
|-----------|---|
| ^6360 | ¾" F x ¾" F Reconnectable E85 Safe-T-Break [®] |
| 6273 | ¾" F x ¾" F Non-Reconnectable E85 Safe-T-Break [®] |

^ NOT UL LISTED

Swivels

| MODEL NO. | DESCRIPTION |
|-----------|------------------------------------|
| ^6350 | ¾" M x ¾" F Multi-plane E85 Swivel |

^ NOT UL LISTED

Spouts

| MODEL NO. | DESCRIPTION |
|-----------|-----------------------------|
| 6207 | Unleaded E85 Spout Assembly |

Pressure/Vacuum Vents

| MODEL NO. | DESCRIPTION |
|-----------|--|
| 4620 | 2" Slip-On Pressure Vacuum Vent |
| 4885 | 2" Thread-On Pressure Vacuum Vent - NPT |
| 5885 | 2" Thread-On Pressure Vacuum Vent with internal screen - NPT |

Accessories, Testing and Maintenance

| MODEL NO. | DESCRIPTION |
|-----------|---|
| 3593 | Hold Open Clip Kit |
| 7490 | Internal Flo-Equalizer [®] - 10 gpm / 37.9 Lpm |
| 7089 | Nozzle Service Kit |
| 4951 | Spout Nut |
| 0397 | Unleaded Spout Gauge |

Guards

| MODEL NO. | DESCRIPTION |
|-----------|-------------------------------------|
| 3376 | Black Handle Guard |
| 4145 | Full Grip Guard |
| 1806 | Full Grip Reguard |
| 5494 | Lever Guard |
| 3440 | Mate Easy-on Package |
| 3795 | Mate Guard |
| 6628 | POPD [®] Clear Cover |
| 6665 | POPD [®] Full Grip Guard |
| 7205 | POPD [®] Full Grip Reguard |
| 7815 | POPD [®] Mate Guard |
| 1506 | Protection Package |
| 1809 | Reguard Protection Package |
| 1808 | Waffle Splash Guard |



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.