



TLL155 Series Specification Sheet

Customer Information	
Customer:	Date:
Contact:	Order No:
Drawing No:	Part No:

Sensor Information	
Applications: <input type="checkbox"/> Static <input type="checkbox"/> Mobile	
Liquid Type: Please Select	
Probe Length: Please Select mm	
Sensor Full Point: 27 mm (Minimum / Standard 27 mm)	
Thread Size: Please Select	
Output Type: <input type="checkbox"/> Resistive <input type="checkbox"/> Voltage <input type="checkbox"/> Current	
Output Range (Empty/Full): Please Select	
Alarm: Standard 12.5% of Active Range Close on Fall	
Mark with following part number:	
Special Features:	
<p>If you require a C/K16 connector kit or a S/K155 shortening kit, please add to your order.</p>	

For Rochester Sensors Use		
Cut Lengths:		
Outer tube: 6 mm	Inner rod: 5 mm	
Rochester Sensors Part No.:		
Action:	Initials	Date
Completed by:		
Engineering Approval:		
BOM/Method Created:		
BOM/Method Approved		

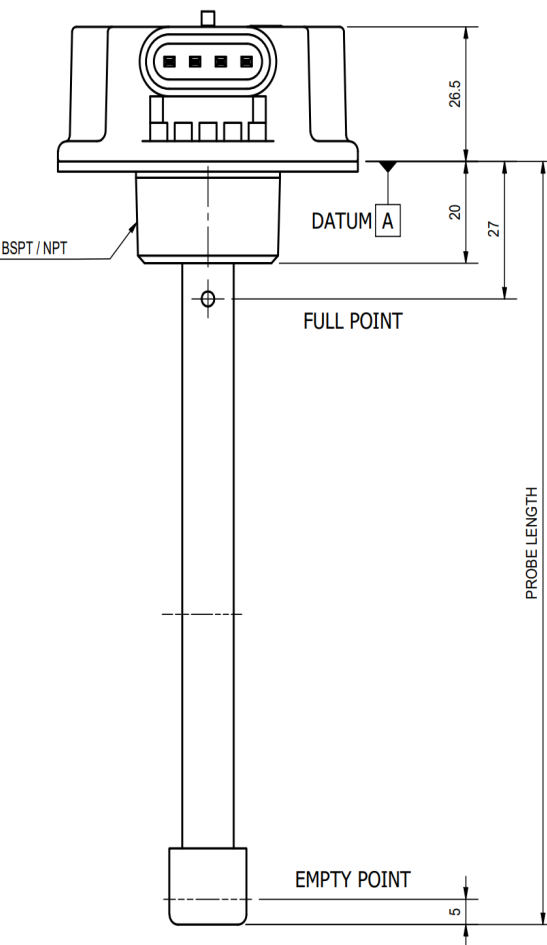

SUPERSEAL 1.5 CONNECTOR (282106-1) PINS			
PIN 4	PIN 3	PIN 2	PIN 1
OUTPUT SIGNAL	LOW-LEVEL ALARM	GROUND	SUPPLY