




Recommended for air, water, oil, gas or mud service to 6,000 PSI NSCWP. This union has a replaceable lip-type seal ring of Buna-N specifically designed to minimize fluid flow turbulence. Lip-type ring provides a pressure seal and protection for metal-to-metal seating surfaces. Smaller and lighter than Fig. 600 unions and are recommended for manifold and truck mounting where size and weight are critical.

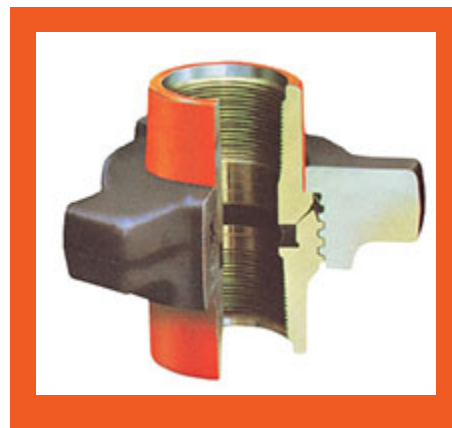

## Specifications

|                        |                  |
|------------------------|------------------|
| <b>Brand</b>           | Catawissa        |
| <b>Type</b>            | Hammer Union     |
| <b>Connection Type</b> | NPT Threaded End |
| <b>Nominal Size</b>    | 1-1/2 in         |
| <b>Nut Material</b>    | Steel Forging    |
| <b>Subs Material</b>   | Steel Forging    |
| <b>Subs Color</b>      | Orange           |
| <b>Nut Color</b>       | Black            |
| <b>SUB CWP</b>         | 6000 psi         |
| <b>NUT Test</b>        | 6000 psi         |
| <b>Product Number</b>  | 0838503444       |
| <b>UPC Code</b>        | 66242890957      |
| <b>HPH Code</b>        | NA               |
| <b>Weight</b>          | 9.04 lb          |



John M. Ellsworth Co., Inc.

P.O. Box 240072  
8700 West Bradley Road  
Milwaukee, WI 53224

800-333-3331 **PHONE**

info@jmesales.com **E-MAIL**  
www.JMEsales.com **WEB**