




Hammer Union. Laminated rings provide electrical isolation from galvanic corrosion, with a total of 35 million ohms resistance. An O-Ring in male sub and a seal ring in female sub provide primary and secondary seals. All seal rings are field-replaceable.

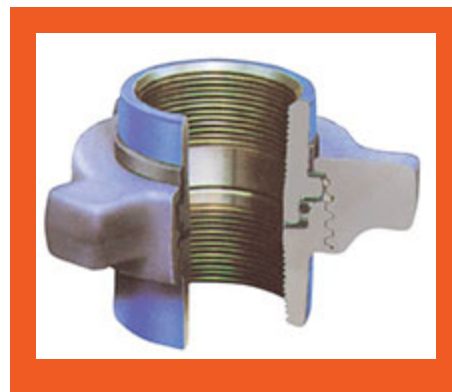

Specifications

Brand	Catawissa
Type	Insulating Union
Connection Type	NPT Threaded End
Nominal Size	2 in
Nut Material	Steel Forging
Subs Material	Steel Forging
Subs Color	Blue
Nut Color	Dark Gray
SUB CWP	2000 psi
NUT Test	3000 psi
Product Number	0838506124
UPC Code	66242890965
HPH Code	NA
Weight	6.24 lb



John M. Ellsworth Co., Inc.

P.O. Box 240072
8700 West Bradley Road
Milwaukee, WI 53224

800-333-3331 **PHONE**

info@jmesales.com **E-MAIL**
www.JMEsales.com **WEB**