


MATERIAL DESCRIPTION			
MODEL	KEY	QTY.	HORIZONTAL FIREGUARD SKID TANK
Outer Diameter			4'-7"
Outer Length			11'-4"
Capacity			1,000 US Gallons Nominal
Inner Gauge			Per UL 2085 / STI F941-10ga.
Outer Gauge			Per UL 2085 / STI F941-10ga.
Code			UL 2085 / STI F941
Supports			Skids Full Length W/ End Caps- 10 Gauge
Fill Opening	A	1	4" 150# Full Coupling W/Repad & Pipe Extension
Pump Opening	B	1	2" 150# Full Coupling W/Repad & Pipe Extension
Gauge Opening	C	1	2" 150# Full Coupling W/Repad & Pipe Extension
Remote Gauge Opening	C1	1	2" 150# Full Coupling W/Repad & Pipe Extension
Op Vent Opening	D	1	2" 150# Full Coupling W/Repad & Pipe Extension
E-Vent Opening	E	1	6" Sch40 Nipple (Inner E-Vent) W/Repad
E-Vent Opening	F	1	6" Sch40 Nipple (Outer E-Vent)
Leak Monitor	G	1	2" 150# Full Coupling W/ Sloted Monitor Pipe
Lift Lug	H	2	Small Lift Lug W/ Repad
Pour/Inspection Port	I	2	2" Weld Flange W/Plug (Seal Welded After pour)
Ground Lug	J	2	1/4" x 2" x 2" Angle w/1/2"φ
STI / UL Labeling	K	Kit	Labeled Per UL 2085 & STI F941 (Fireguard)

TANK SHALL BE BUILT & LABELED PER UL 2085, STI F-941 FIRE GUARD  
 UL FILE # MH21280



Surface Prep: Brush Blast  
 Paint: Polane White  
 Testing: Per UL 2085  
 Operating Pressure: Atmospheric  
 Estimated Dry Weight: 4,500lbs

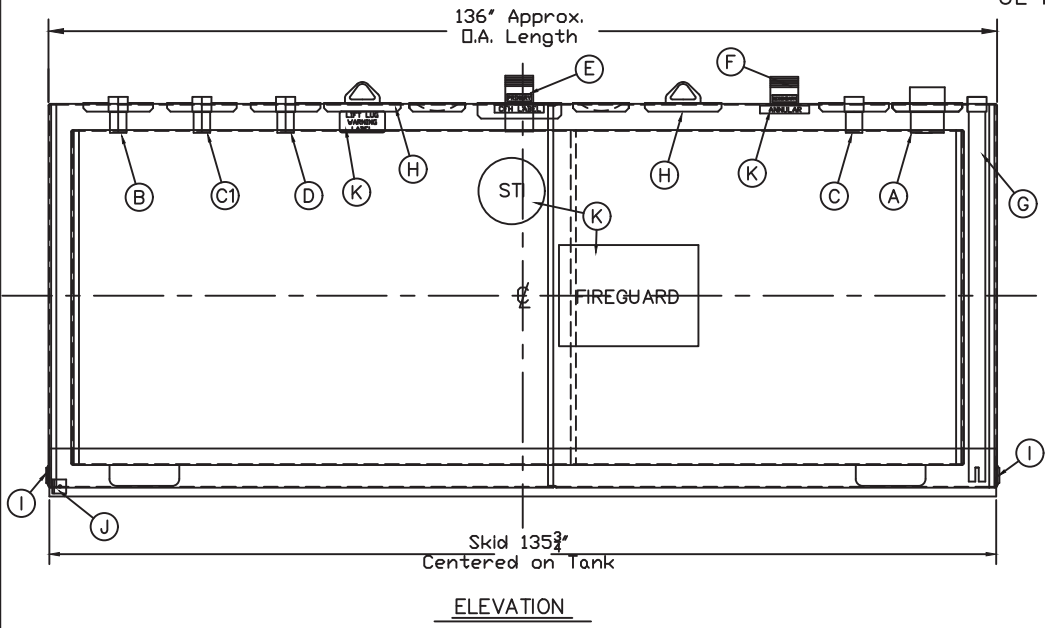