


MATERIAL DESCRIPTION			
MODEL	KEY	QTY	HORIZONTAL DW UL 142 SKID TANK
Outer Diameter			3'-3"
Outer Length			5'-1/2"
Capacity			300 US Gallons Nominal
Inner Gauge			Per UL 142 - 12 Gauge
Outer Gauge			Per UL 142 - 12 Gauge
Code			UL 142
Supports	A	2	Skids Full Length - 12 Gauge
Fill Opening	B	1	2" 150# Full Coupling W/Repad
Pump Opening	C	1	2" 150# Full Coupling W/Repad
Gauge Opening	D	1	2" 150# Full Coupling W/Repad
Op Vent Opening	E	1	2" 150# Full Coupling W/Repad
E-Vent Opening	F	1	4" Sch40 Nipple (Inner E-Vent) W/Repad
E-Vent Opening	G	1	4" Sch40 Nipple (Outer E-Vent)
Leak Monitor	H	1	2" Monitor Pipe (MNPT)
Remote Level Gauge	I	1	2" 150# Full Coupling W/Repad
Lift Lug	J	2	Small Lift Lug
Inner Drain	K	1	1" 150# Full Coupling W/Repad
UL Labeling	L	Set	Labeled Per UL142

TANK SHALL BE BUILT & LABELED PER UL 142 STANDARD FOR STEEL ABOVEGROUND TANKS FOR FLAMMABLE AND COMBUSTIBLE LIQUIDS  
UL FILE # MH5668

Surface Prep: Brush Blast  
Paint: Polane White  
Testing: Per UL 142  
Operating Pressure: Atmospheric  
Estimated Dry Weight: 710 lbs

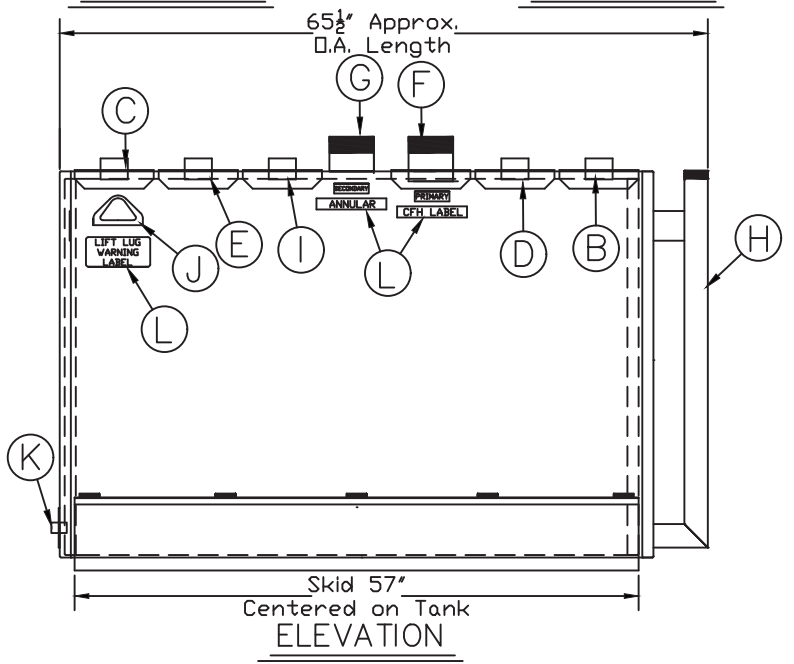

SCALE