Chicago Valves & Controls



SERIES 81/FS81

FLANGED STANDARD PORT

BALL VALVE CLASS 150

1" - 4" 150#

CARBON STEEL - AST A216 WCB
316 STAINLESS STEEL - ASTM C8FM
ANTI-STATIC DEVICE
LIVE LOADED STEM
DIRECT MOUNTED PAD
ELEVATED PAD ALLOWED TO ADJUST
GLAND PACKING FLANGE WHILE
REMOVING ACTUATOR OR HANDLE
NACE MR0175

Series 81/FS81

(18) (17)

(14)

13 (12) (10)

(9) (8) (7) (6)

2 3 5


PARTS & MATERIAL


PART NO	PART NAME	QTY	MATERIAL				
1	BODY	1	CARBON STEEL ASTM A216 WCB 316 STAINLESS STEEL ASTM A351 CF8M				
2	SEAT	2	RTFE				
3	BALL	1	316 STAINLESS STEEL				
4	SEAT RETAINER	1	AS #1 (BODY)				
5	BODY SEAL	1	PTFE, GRAPHITE				
6	ANTI-STATIC BALL	2	300 SERIES STAINLESS STEEL HARD DRAWN STAINLESS STEEL				
7	STEM	1	316 STAINLESS STEEL				
8	THRUST BEARING	1	XN (CARBON FILL TFM)				
9	STEM PACKING	4	TFM, GRAPHITE				
10	GLAND PACKING	1	300 SERIES STAINLESS STEEL				
11	BELLEVILLE WASHER	2	300 SERIES STAINLESS STEEL				
12	GLAND FLANGE NUT	2	300 SERIES STAINLESS STEEL				
13	SPRING WASHER	2	300 SERIES STAINLESS STEEL				
14	GLAND FLANGE	1	304 SERIES STAINLESS STEEL				
15	GLAND FLANGE BOLT	2	300 SERIES STAINLESS STEEL				
16	HANDLE	1	304 SERIES STAINLESS STEEL				
17	STEM COVER	1	304 SERIES STAINLESS STEEL				
18	NUT STOPPER	1	300 SERIES STAINLESS STEEL				
19	BOLT STOPPER	1	300 SERIES STAINLESS STEEL				
20	STEM COVER BOLT	1	300 SERIES STAINLESS STEEL				

Series 81/FS81

DIMENSIONS (INCHES)

NOMINAL DIAMETER	L	d	d0	D2	D1	D	b	f	n-0d1	Н	h	H1	W	Ra	Rb	КХК	A	В
1"	5.00	0.98	0.79	2.01	3.13	4.33	0.41	0.08	4-00.63	2.36	0.37	3.62	7.09	0.12	0.14	0.43X0.43	F04	F05
11/2"	6.50	1.58	1.26	2.87	3.87	4.92	0.50	0.08	4-00.63	2.99	0.43	4.41	8.27	0.14	0.17	0.55X0.55	F05	F07
2"	7.00	1.97	1.58	3.62	4.75	5.91	0.56	0.08	4-00.75	3.35	0.55	4.76	8.27	0.14	0.17	0.55X0.55	F05	F07
21/2"	7.48	2.56	1.97	4.13	5.50	7.09	0.63	0.08	4-00.75	3.66	0.55	5.23	10.24	0.17	0.22	0.67X0.67	F07	F10
3"	7.99	3.15	2.56	5.00	6.00	7.48	0.69	0.08	4-00.75	4.41	0.67	6.22	12.99	0.17	0.22	0.67X0.67	F07	F10
4"	9.02	3.94	3.15	9.06	7.50	9.06	0.88	0.08	8-00.75	7.92	0.67	6.73	12.99	0.17	0.22	0.67X0.67	F07	F10

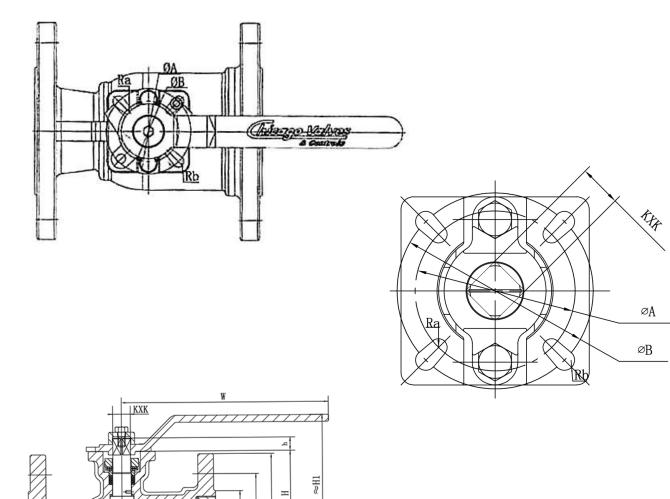

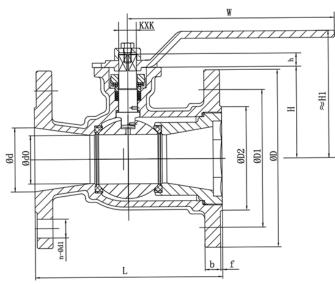


APPLICABLE STANDARDS

BASIC DESIGN	ASME B16.34				
FACE TO FACE DIMENSION	ASME B16.10				
FLANGE DIMENSIONS	ASME B16.5				
TEST	API 598				
MOUNTED PADS DIEM	ISO 5211				
FIRE SAFE TEST	API 607 6th EDITION				
NACE	MR 0175				

SIZE	CV (GPM)	WEIGHT IN LBS.			
1"	25	4.50			
1½"	82	9.00			
2"	120	15.00			
2 ½"	240	21.50			
3"	350	33.50			
4"	720	52.00			

PRESSURE-TEMPERATURE RATINGS SERIES 81

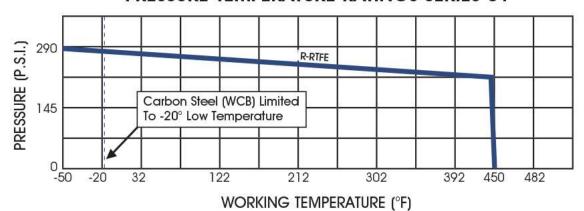

HOW TO ORDER

