Push-On Hose Barb Fittings

Application

· Intended for use with Lok-On (push-on style) hose only

Features

- No hose clamps or ferrules are needed for installation
- Properly grips push-on hose only when pushed all the way in, with the cut end of the hose completely concealed by the plastic cap

Female 45° SAE/37° JIC Swivel x Hose Barb




plastic cap



brass cap



stainless steel

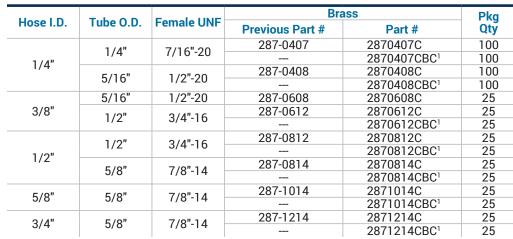

Hose I.D.	Tube O.D.	Female UNF	303 Stainless Steel		
			Previous Part #	Part #	
1/4"	1/4"	7/16"-20	287-0407SS	2870407SS	
1/2"	1/2"	3/4"-16	287-0812SS	2870812SS	

¹ Brass cap on CBC part numbers

Female 37° JIC Swivel x Hose Barb



brass



303 stainless steel

Hose I.D.	Tube O.D.	Female UNF	Brass		Pkg
			Previous Part #	Part #	Qty
1/4"	3/8"	9/16"-18	288-0409	2880409C	50
				2880409CBC1	50
5/16"	3/8"	9/16"-18	288-0509	2880509C	50
3/8"	3/8"	9/16"-18	288-0609	2880609C	50
				2880609CBC1	100
1/2"	3/8"	9/16"-18	288-0809	2880809C	25
3/4"	3/4"	1-1/16"-12 ²	288-1217	2881217C	10
				2881217CBC1	10
1"	1"	1-5/16"-12 ²	288-1621	2881621C	10

¹ Brass cap on CBC part numbers

Hose I.D.	Tube O.D.	Female UNF	303 Stainless Steel	
			Previous Part #	Part #
3/8"	3/8"	9/16"-18	288-0609SS	2880609SS
3/4"	3/4"	1-1/16"-122	288-1217SS	2881217SS
1"	1"	1-5/16"-122	288-1621SS	2881621SS

² UN Thread

Female 37° JIC / 45° SAE Swivel x 90° Elbow



- ¹ Notch in nut for SAE identification
- ² JIC only, may substitute dual angle
- 3 UN thread

