


Product Specifications

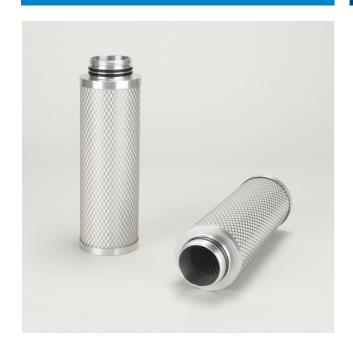

1C122164

FILTER ELEMENT, AK 10/30

Attributes

| Connection Type | UF Threaded End |
|-------------------------------|------------------------------|
| Diameter | 3.39 inch (86 mm) |
| Element O-Ring Material | Perbunan |
| Element Model | AK |
| Element Size | Size 10/30 |
| Element Type | AG, SG and HD Element |
| End Cap Material | Aluminum |
| Length | 11.02 inch (280 mm) |
| Maximum Operating Temperature | 140 °F (60 °C) |
| Media Type | Activated Carbon |
| Inner Core Material | 1.4301 / 304 Stainless Steel |

| Outer Core Material | 1.4301 / 304 Stainless Steel |
|----------------------------------|--|
| Recommended Replacement Interval | 2000 Hours |
| Residual Oil-Content | < 0.003 at Appropriate Pre-Purification < 0.01 |
| | |

Packaged Dimensions

| Packaged Length | 0.29 inch (0.737 cm) |
|-----------------|----------------------|
| Packaged Width | 0.09 inch (0.229 cm) |
| Packaged Height | 0.09 inch (0.229 cm) |
| Packaged Weight | 1.35 lb (0.612 kg) |
| Packaged Volume | 0.08 ft3 (0.002 m3) |
| | |

Other Information

| NMFC Code | 069100-13 |
|-------------|-----------|
| UNSPSC Code | 40161505 |

The information contained herein is general in nature and may not reflect actual information regarding the part at time of shipment. Parts may originate in more than one country – the actual country of origin and HS Code will be reflected on the Commercial Invoice(s) that accompanies the goods.