


HEIGHT BAR ALARM

1. SETUP

- The unit is shipped with the battery pre-installed and the power switch set to "OFF".
- Test the alarm on a bench by switching the toggle switch to "ON" and then disturbing the box. The alarm will last 10 seconds.(this is the minimum time it is possible to set) If you want to change the alarm time to longer then refer to the instructions for this on our website.
- Mount the box on a bar of some kind. PVC pipe is a common choice but with an adapter you can use any rigid bar. Mount the bar well in front of the object to give a forklift operator time to hit the brakes!
- Once the bar is mounted on the pipe, position so the bubble level is level. Then tighten the thumbscrew knob.

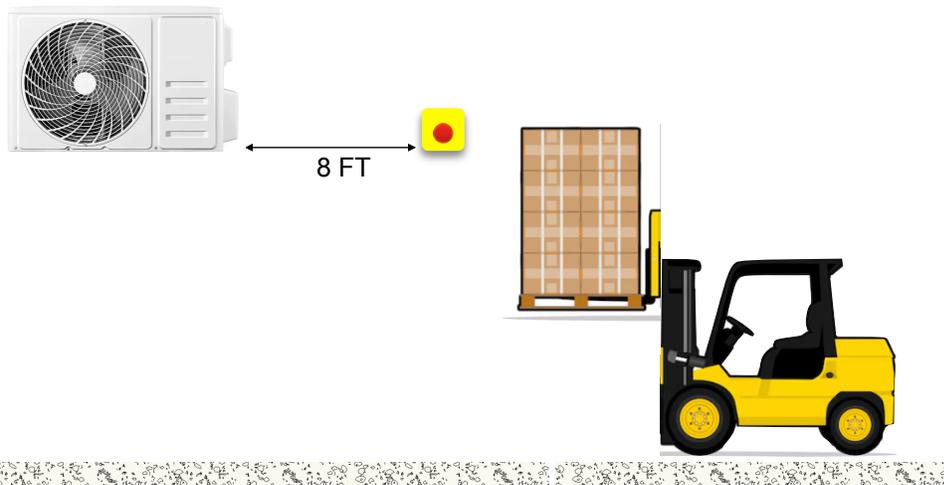

2. MAINTENANCE

- The battery life is 10 years. Its not possible for it to become exhausted by alarm events - unless its being struck daily!
- There is no low battery alert so occasional testing is prudent.
- No other maintenance is necessary.



John M. Ellsworth Co., Inc.

P.O. Box 240072
8700 West Bradley Road
Milwaukee, WI 53224

800-333-3331 **PHONE**

info@jmesales.com **E-MAIL**
www.JMEsales.com **WEB**