
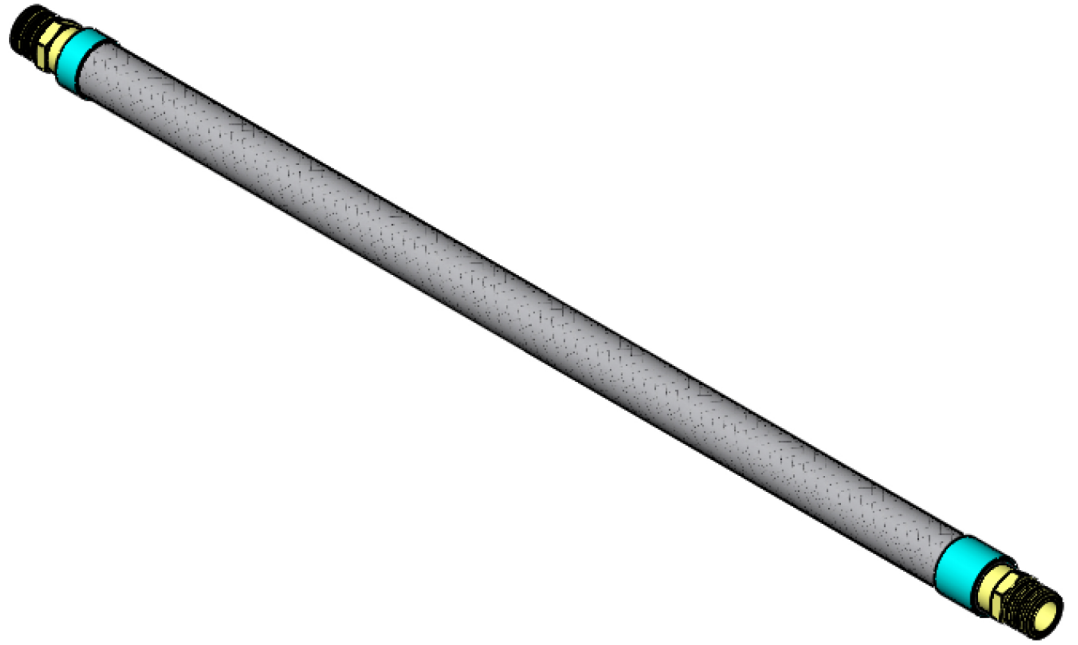


| REVISIONS | | | |
|-----------|-------------|------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |

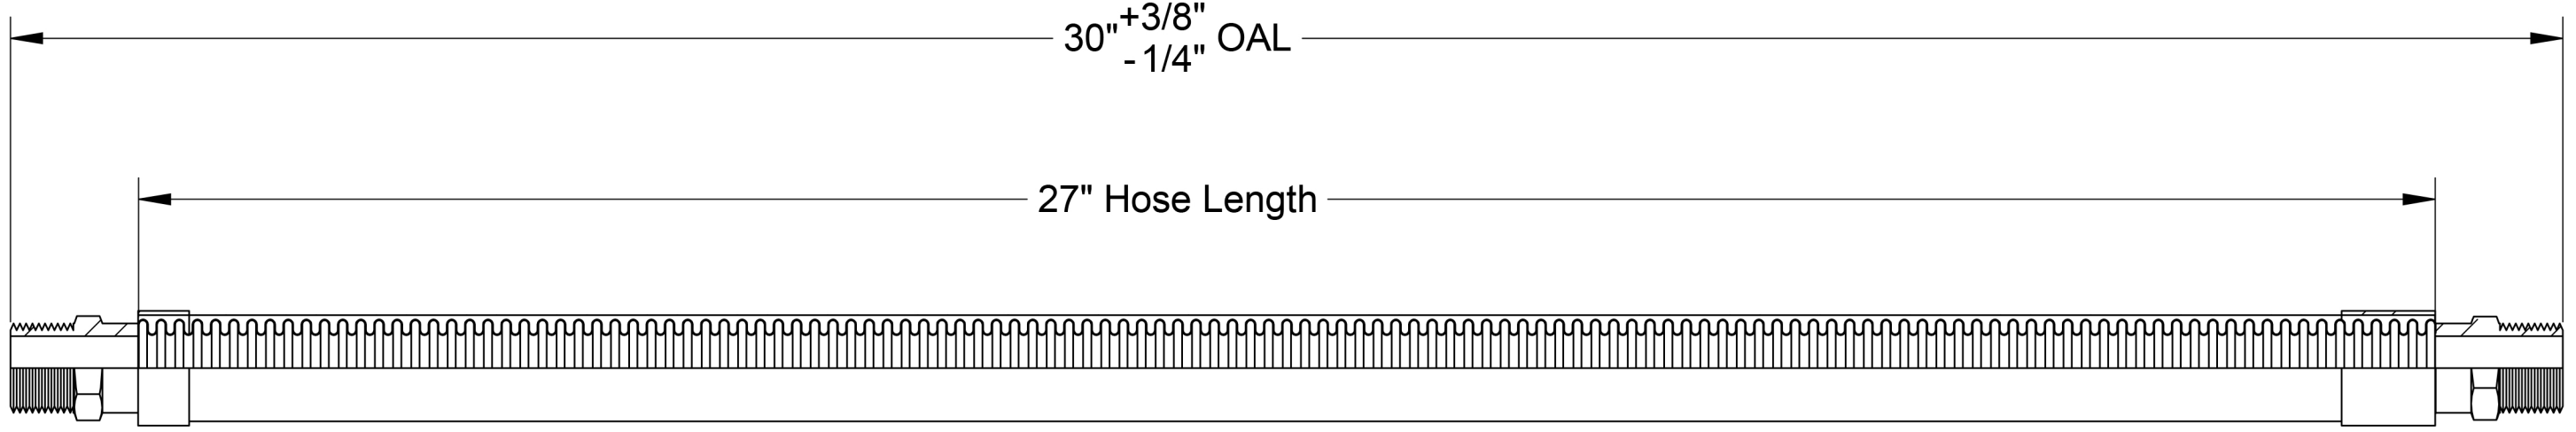


| ITEM # | QTY. | PART NUMBER | DESCRIPTION | MATERIAL | WEIGHT |
|--------|------|--------------|--|-----------------|--------|
| 1 | 1 | HOSE | 300 Series Stainless HYDROFORMED Corrugated Hose | Stainless Steel | 0.51 |
| 2 | 1 | BRAID | 300 Series Stainless Steel | Stainless Steel | 0.06 |
| 3 | 1 | BRAID COLLAR | 0.05" Thick | Stainless Steel | 0.03 |
| 4 | 1 | COLLAR 2 | 0.05" Thick | Stainless Steel | 0.06 |
| 5 | 2 | 0.75" MALE | 0.75" Male, 3/4"x14" Thread, 1.06" Hex | Stainless Steel | 0.16 |


HOSE MASTER Inc.
 1233 East 222nd Street • Cleveland, Ohio 44117
 (800) 221-2319 • Fax: (216) 481-7557 • www.hosemaster.com
 Locations: **Cleveland • Houston**

Registered to: ISO 9001 : 2000

 **NAHAD**
Listed Manufacturer

| | | |
|---|--|--------------------------------------|
| Projection: | Customer: Hose Master Inc. | Prepared By: kannk |
|  | Reference: Fire-Shield - 0.75" Male x 0.75" Male x 30" OAL | CALC. WEIGHT: 1 lbs. Date: 9/24/2009 |

Description: **0.75" ID x 30" OAL 300 Series Stainless HYDROFORMED Corrugated Hose covered by 300 Series Stainless Braid. UL Approved 0.75" Male Connectors**

| | | | | |
|------------|--------------------|-------|---|--------------|
| Drawing #: | FSMM0075x30 | Rev.: | - | SHEET 1 OF 1 |
|------------|--------------------|-------|---|--------------|

