
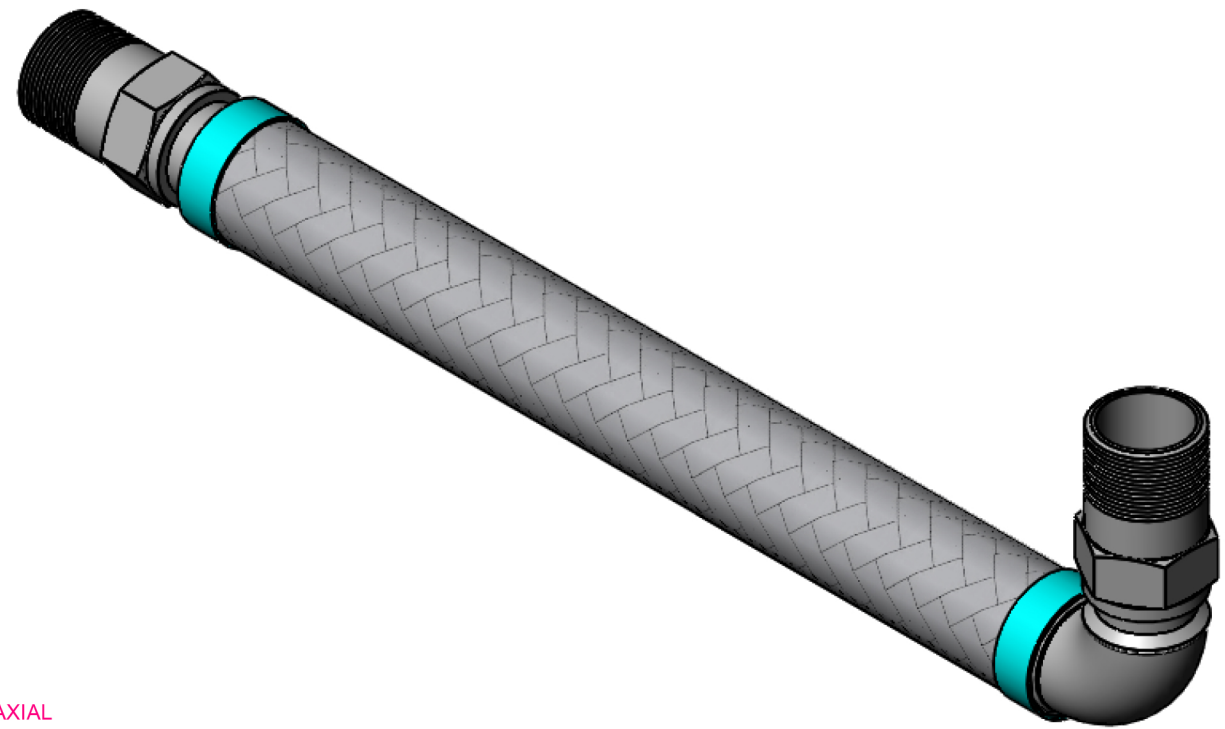


8 7 6 5 4 3 2 1

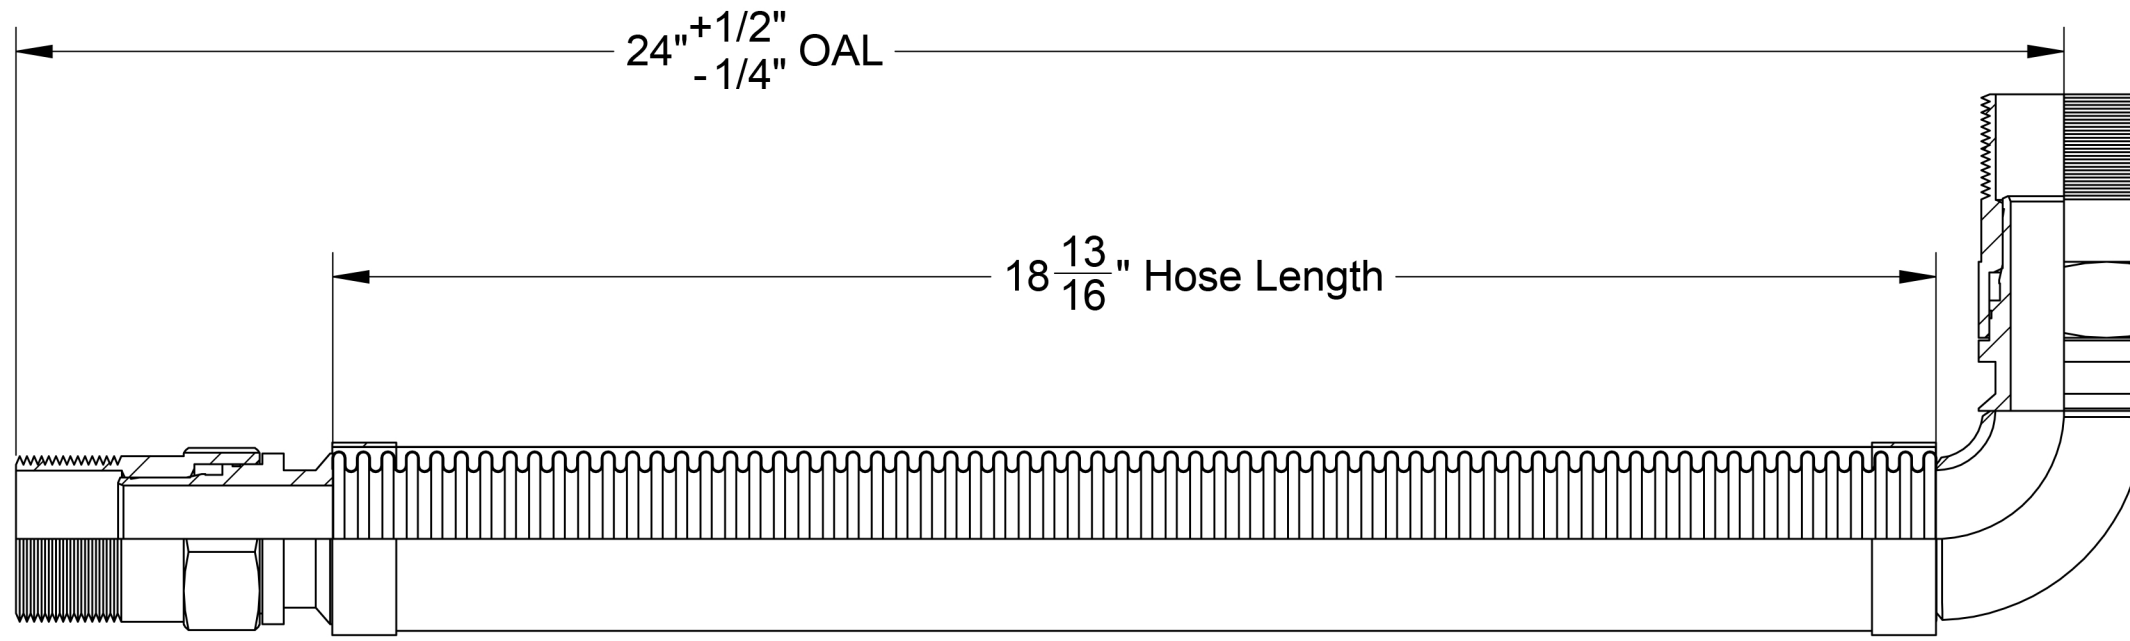

| ITEM # | QTY. | PART NUMBER | DESCRIPTION | MATERIAL | WEIGHT |
|--------|------|------------------|--|-----------------|--------|
| 1 | 1 | HOSE | 300 Series Stainless HYDROFORMED Corrugated Hose | Stainless Steel | 0.80 |
| 2 | 1 | BRAID | 300 Series Stainless Steel | Stainless Steel | 0.07 |
| 3 | 2 | BRAID COLLAR | 0.05" Thick | Stainless Steel | 0.07 |
| 4 | 2 | 1.5" MALE SWIVEL | 1.5" Male Swivel, 1-1/2"x11-1/2" Thread, 1.94" Hex | Carbon Steel | 1.40 |
| 5 | 1 | 1.5" ELBOW | 1.5" Short Radius Elbow, Sch. 40 | Carbon Steel | 0.52 |

HOSE MASTER Inc.
 1233 East 222nd Street • Cleveland, Ohio 44117
 (800) 221-2319 • Fax: (216) 481-7557 • www.hosemaster.com
 Locations: **Cleveland • Houston**

Registered to:
ISO 9001 : 2000

NAHAD
Listed Manufacturer

| | | |
|-------------|--|--------------------------------------|
| Projection: | Customer: Hose Master Inc. | Prepared By: kannk |
| | Reference: Fire-Shield - 1.5" Male Swivel x 1.5" 90 Degree Male Swivel x 24 " OAL | CALC. WEIGHT: 4 lbs. Date: 9/24/2009 |
| | Description: 1.5" ID x 24" OAL 300 Series Stainless HYDROFORMED Corrugated Hose covered by 300 Series Stainless Braid. UL Approved 1.5" Male Swivel Connector x 1.5" ID 90 Degree Male Swivel Connector | |
| Drawing #: | FSSSE0150x24 | Rev.: - SHEET 1 OF 1 |

| REVISIONS | | | |
|-----------|-------------|------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| 8 | | 7 | 6 |

8 7 6 5 4 3 2 1