

C-Series Industrial Grade for Professional Use

For 1/4", 3/8", and 1/2" Hose I.D.

C-Series all steel hose reels are designed for industrial applications and vehicle maintenance where rigorous daily use occurs. Heavy gauge base with no welds or bolts, this product will give years of dependable service in high use applications. With a carbon steel outlet swivel and fluid shaft, the reels are available for use in low pressure (300psi), medium pressure (2,000psi) and high pressure (5000psi) applications for air, water, oil, and grease.

This product is ideal where hose storage and operating efficiency are needed. Full flow 1/2" shaft allows maximum delivery to the application point. Eight position guide arm allows easy adjustment to the position best suited.

Product Name:

Hosetract C-Series Low/Medium/High Pressure

Manufacturer:

Hosetract
6433 Discount Drive
Fort Wayne, IN 46818
www.hosetract.com

Swivel:

Carbon Steel zinc coated 200°F max temperature
Optional: -SSB

Stainless steel with BUNA o'ring
Includes stainless steel shaft
Low pressure
250°F max temperature

-SSV
Stainless steel with Viton o'ring
Includes stainless steel shaft
400°F max temperature
4000 PSI

Constant Tension models available.

Constant tension reels have the latching mechanism removed allowing for constant movement in and out of the reel. Used on devices with a hydraulic supply and return system such as mower decks on large tractors. These models are made with a unique bearing to provide long life with the high demands of this application.


- TU includes the guide arm
- CT does not include a guide arm

Features:

- Reels shipped standard sf hose payout position.
- Available in Powder Coat or (304) Stainless Steel.
- Mounting Slots - 1/2" wide x 3/4" deep for max 7/16" dia. bolt



Inlet - 1/2" FPT
Max. Temp. - 200°F

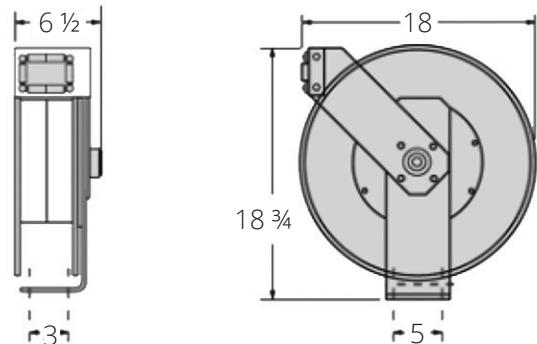

Standard sf position

C-Series

Industrial Grade for Professional Use

For 1/4", 3/8", and 1/2" Hose I.D.

C SERIES

Models without hose and hose stop

| Model # | Weight | PSI | Hose Capacity ID | Hose Capacity Length | Hose End Fitting |
|------------|--------|------|------------------|----------------------|------------------|
| LC-300 | 46 | 1000 | 3/8" | 50' | None |
| LC-500 | 46 | 1000 | 1/2" | 50' | None |
| LC-500-SSB | 47 | 1000 | 1/2" | 50' | None |
| MC-300 | 47 | 2000 | 3/8" | 50' | None |
| MC-300-SSV | 48 | 4000 | 3/8" | 50' | None |
| MC-500 | 47 | 2000 | 1/2" | 50' | None |
| MC-500-CT | 48 | 2000 | 1/2" | 50' | None |
| MC-500-TU | 48 | 2000 | 1/2" | 50' | None |
| MC-500-SSV | 48 | 4000 | 1/2" | 50' | None |
| HC-200 | 46 | 5000 | 1/4" | 50' | None |
| HC-300 | 46 | 4000 | 3/8" | 50' | None |

Models with hose and hose stop

| Model # | Weight | PSI | Hose ID | Hose Length | Hose End Fitting |
|------------------------|--------|------------------------|---------|-------------|------------------|
| Air/Water/AF/WW | | Low Pressure | | | |
| LC-350 | 50 | 300 | 3/8" | 50' | 3/8" NPTM |
| LC-370 | 54 | 300 | 3/8" | 70' | 3/8" NPTM |
| LC-550 | 57 | 300 | 1/2" | 50' | 1/2" NPTM |
| Lubricants | | Medium Pressure | | | |
| MC-350 | 58 | 2000 | 3/8" | 50' | 3/8" NPTM |
| MC-550 | 58 | 2000 | 1/2" | 50' | 1/2" NPTM |
| MC-550-CT | 62 | 2000 | 1/2" | 50' | 1/2" NPTM |
| MC-550-TU | 62 | 2000 | 1/2" | 50' | 1/2" NPTM |
| Grease | | High Pressure | | | |
| HC-250 | 59 | 5000 | 1/4" | 50' | 1/4" NPTM |
| HC-350 | 62 | 4000 | 3/8" | 50' | 3/8" NPTM |

ACCESSORIES:


1234A - 1/4"

1233A - 3/8"

1232A - 1/2"

Mount Assemblies


1279A - I-Beam Bracket

1282A - Swivel Bracket