


flexVAPOR™ 120 ST (ST120 VP)



Gasoline vapor recovery hose

A specialized solution for vapor recovery. Featuring a nitrile rubber static dissipating tube, grounding wire, and smooth bore for precise flow. External helix ensures easy drag.

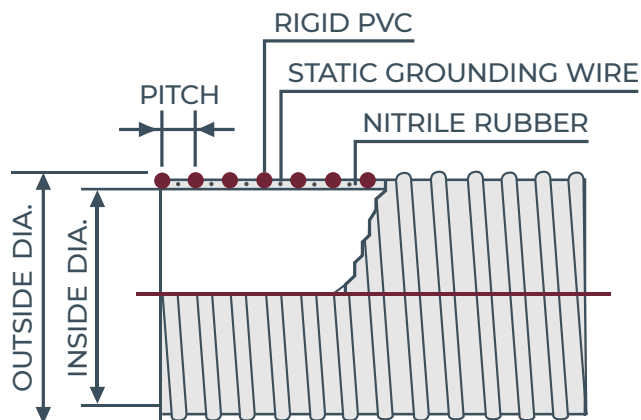

FEATURES

Nitrile rubber static dissipating tube and static grounding wire provide maximum static resistance when connected to a grounded system. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. External helix provides easy drag.

APPLICATIONS

Gasoline vapor recovery hose only

CONSTRUCTION

Nitrile rubber, rigid PVC helix, smooth bore, corrugated O.D., static grounding wire

TEMP. RANGE

-40°F to 140°F

NOTE

Static wire must be properly imbedded during fitting installation and tested to assure proper static grounding of hose to a grounded system.

AVAILABLE SIZES

ID in / mm	OD in / mm	Pitch in / mm	Minimum Bend Radius in / mm	Working Pressure PSI / bar	Vacuum Rating inHg / kPa	Weight lb/ft / kg/m	Standard Length ft / m
2 / 50.8	2.36 / 59.9	0.39 / 9.9	3.0 / 76.2	20 / 1.38	29.8 / 100.9	0.61 / 0.91	60,100 / 18.29, 30.48
3 / 76.2	3.46 / 87.9	0.59 / 15.0	3.5 / 88.9	10 / 0.69	29.8 / 100.9	1.00 / 1.49	60,100 / 18.29, 30.48
4 / 101.6	4.57 / 116.1	0.65 / 16.5	5.0 / 127	10 / 0.69	29.8 / 100.9	1.70 / 2.53	60,100 / 18.29, 30.48



John M. Ellsworth Co., Inc.

A John M. Ellsworth Company

P.O. Box 240072
8700 West Bradley Road
Milwaukee, WI 53224

800-333-3331 **PHONE**

info@jmesales.com **E-MAIL**
www.JMESales.com **WEB**