

NEW &
ENHANCED

FOREMAN® 500

Indirect-Fired Portable Heater

- ✓ Reliable BTU at 500,000 btu/hr
- ✓ Reliable CFM with two 12" dia. outlet
- ✓ One-person portability with handle and wheels
- ✓ Quiet operation at 70 dB or less
- ✓ NEW Operator-friendly control panel with:
 - Voltmeter that monitors incoming volts
 - Hour meter that clocks actual runtime (heat mode only)
 - Status and diagnostic lights
- ✓ NEW 62-gal. fuel tank for 15-gal of added capacity and +5 to 6 hours of max runtime (oil model only)
- ✓ Loaded with options to aid fuel efficiency including thermostatic control, recirculation mode, and fan-only vent mode
- ✓ Jobsite tough with indoor/outdoor rating, robust parts and protective frame
- ✓ Efficient storage options with no flat wheels and frame that allows for vertical stacking

L.B.WHITE

L.B.WHITE
LINK


L.B. White LINK™

Now telematics-enabled to put critical alerts, runtime, location, and more at your fingertips.

Learn more at LBWhite.com/LINK.

Accessories (Sold Separately)

- Vent Pipe Extension
- Rain Cap
- Regulator for DF model only
- Gas Hose for DF model only
- Duct (12", 16" and/or 20" dia.)
- Duct Adapter (Takes 2 x 12" down to 1 x 16")
- Thermostat with 25 ft cord
- Beckett® GeniSys Contractor Display Tool (For oil model only)
- Stacking Kit

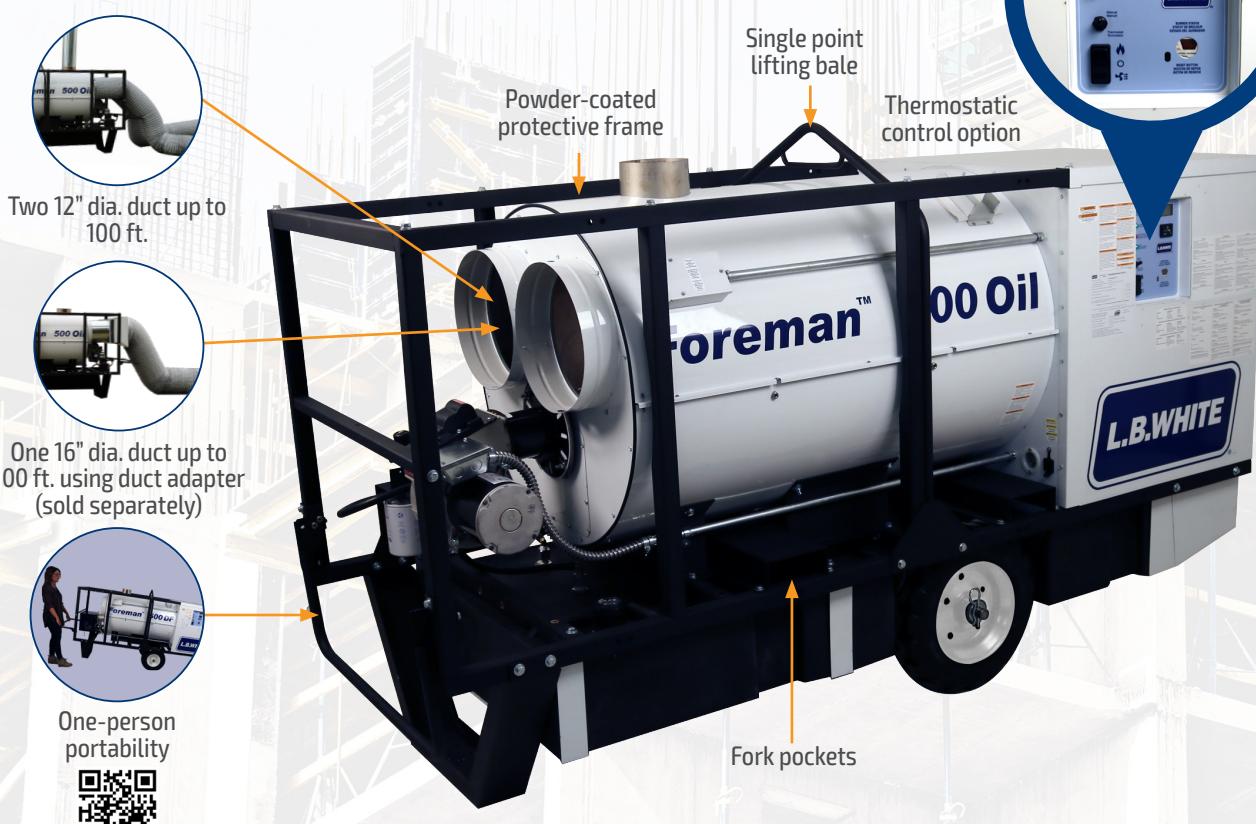

NEW Control Panel:
• Volt Meter
• Hour Meter
• Diagnostic Lights

Air recirculation option, 20" dia. duct runs up to 25 ft.

Stackable (kit sold separately)

NEW &
ENHANCED

FOREMAN® 500

Indirect-Fired Portable Heater

L.B.WHITE

FOREMAN®

| | 500 DF | 500 OIL |
|--|----------------------|----------|
| BTU/H RATING | 500,000 | 500,000 |
| FUEL TYPE | LP, NG | DIESEL |
| FUEL CONSUMPTION MAX | LP (LBS./HR) | 23.0 |
| | NG (CU.FT/HR) | 500.0 |
| | DIESEL 1 OR 2 (G/HR) | -- |
| INLET GAS PRESSURE MIN./MAX. | LP (IN W.C.) | 8/13.5 |
| | NG (IN W.C.) | 8/13.5 |
| BURNER TYPE | RIELLO® | BECKETT® |
| TANK CAPACITY (GALLON) | -- | 62 |
| BLOWER FAN OUTPUT (CFM) | 3,457 | 3,457 |
| OUTLET STATIC PRESSURE (IN W.C.) | 2.5 | 2.5 |
| OUTLET DUCT DIAMETER (INCH) | 12X2 | 12X2 |
| RECIRCULATION DUCT DIAMETER (INCH) | 20 | 20 |
| MOTOR HORSEPOWER | 1.5 | 1.5 |
| ELECTRICAL SUPPLY (VOLTS/HZ/PHASE) | 120/60/1 | 120/60/1 |
| AMPS (START/CONTINOUS) | 35/13.5 | 35/13.5 |
| UNIT WEIGHT (LBS) | 674 | 780 |
| UNIT LENGTH (IN) | 94.0 | 94.0 |
| UNIT WIDTH (IN) | 32.0 | 32.0 |
| UNIT HEIGHT (IN) | 53.0 | 53.0 |
| SHIP WEIGHT (LBS)* | 852 | 960 |
| SHIP LENGTH (IN) | 101 | 101 |
| SHIP WIDTH (IN) | 39 | 39 |
| SHIP HEIGHT (IN) | 60 | 60 |
| LINK™ CAPABLE | S | S |
| LINK™ READY | 0 | 0 |
| THIRD PARTY CERTIFIED TO ANSIZ83.7/CSA 2.14-2017 | YES | YES |

TWO YEAR WARRANTY

S=Standard O=Optional



*Ships on custom pallet.

Heaters ship standard to run at 0-2000 feet.
To operate at higher altitudes, please note in order
process to allow for appropriate deviation.

CA RESIDENTS:



Cancer and reproductive harm. See
www.P65Warnings.ca.gov.

INNOVATIVE HEATING SOLUTIONS

411 Mason Street, Onalaska, WI 54650
(800) 345 7200
(608) 783 5691
(608) 783 6115, fax
www.lbwhite.com



© 2021 L.B. White Co.
All rights reserved.
All specifications are subject
to change without notice.