

A photograph of a construction site with several large cranes and a building under construction. In the foreground, three L.B. White Premier ductable heaters are displayed: a Premier 40, a Premier 80, and a Premier 350 DF. The heaters are white with blue accents and have flexible ducting attached. The background shows a large construction site with multiple cranes and a building's steel framework.**L.B.WHITE****PREMIER®
DUCTABLE HEATERS**

PREMIER®	40	80	80 DF	170	170 DF	350 DF
BTU/HR RATING	40,000	80,000	80,000	170,000	170,000	350,000
HEATED AIR OUTPUT (CFM)	330	450	450	1,200	1,200	2,500
FUEL TYPE	LP	LP	LP, NG	LP	LP, NG	LP, NG
FUEL CONSUMPTION LP GAS MAX (LBS/HR)	1.9	3.7	3.7	7.9	7.9	16.2
FUEL CONSUMPTION NG GAS MAX (CU FT/HR)	-	-	80	-	170	350
AMPS (START/CONTINUOUS)	2.6 / 1.0	5.0 / 1.5	5.0 / 1.5	7.3 / 5.0	7.3 / 5.0	25.0* / 9.0
MOTOR HORSEPOWER	1/12	1/8	1/8	1/3	1/3	1
LENGTH (IN)	25.0	29.5	29.5	32.3	32.3	48.3
WIDTH (IN)	14.5	13.5	13.5	24.3	24.3	28.0
HEIGHT (IN)	16.3	22.0	22.0	32.0	32.0	41.0
SHIPPING WEIGHT (LB)	60.0	79.0	79.0	161.0	161.0	320.0
CASE MATERIAL	TRI-SHIELD™**	TRI-SHIELD™**	TRI-SHIELD™**	TRI-SHIELD™**	TRI-SHIELD™**	TRI-SHIELD™**
WHEELS	-	-	-	SEMI-PNEUMATIC	SEMI-PNEUMATIC	SEMI-PNEUMATIC
VENTILATION (FAN ONLY)	S	S	S	S	S	S
THERMOSTAT	S	S	S	S	S	S
DUCTING DIAMETER (IN)	8	12	12	12	12	18
DUCTING MAX LENGTH (FT)	12	12	12	12	12	25
U.S./CA CERTIFICATION	YES	YES	YES	YES	YES	YES
TWO YEAR WARRANTY						

S=Standard 0=Optional

* Amps spike over 15 during initial start-up. Check breaker capability.

** Tri-shield coats steel with three unique protective layers including: a non-corrosive hot-dipped galvanized steel, an oven-cured epoxy primer and baked, thermosetting polyester.




CA RESIDENTS:

WARNING
Cancer and reproductive harm. See
www.P65Warnings.ca.gov.

**WORLD PROVIDER OF INNOVATIVE HEATING SOLUTIONS**

411 Mason Street, Onalaska, WI 54650
(800) 345 7200
(608) 783 5691
(608) 783 6115, fax
www.lbwhite.com


 **MADE IN USA**
OF U.S. & IMPORTED PARTS

© 2017 L.B. White Co.
All rights reserved.
All specifications are subject
to change without notice.

L.B.WHITE

PREMIER[®] DUCTABLE HEATERS

PORTABLE, DEPENDABLE HEATERS USED FOR HUNDREDS OF APPLICATIONS.

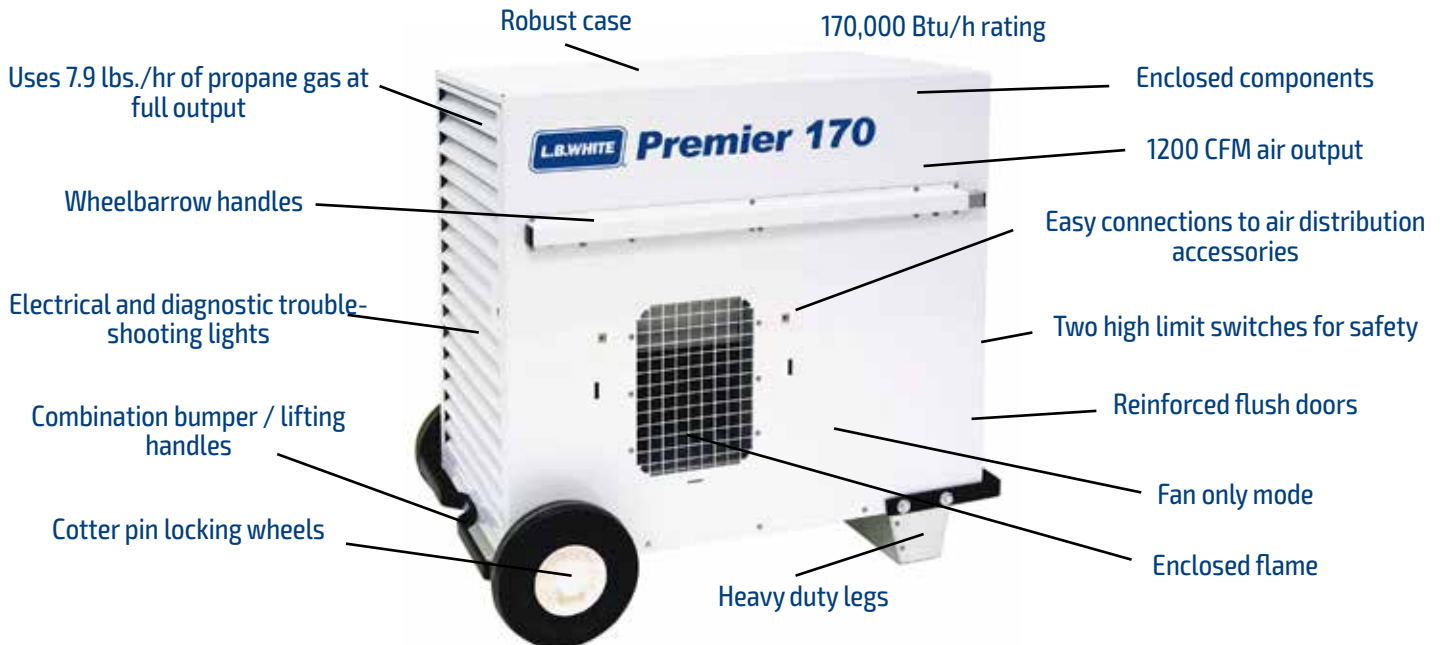

Dual fuel models switch fuels easily with simple valve turn

COMES WITH:



OTHER FEATURES INCLUDE:

- LP and dual fuel models available
- Versatile indoor and outdoor placement of heater
- Direct-fired = 99.97% fuel efficiency
- High volume of air output for maximum heat distribution
- Tri-shield finish provides superior protection against abrasion and corrosion
- Easy to transport
- CSA US and Canada



Great for heating and drying many applications including drywalling, framing, stucco work, construction enclosures, concrete work, brick and block laying, freeze protection, bridge work, docks, warehouses, excavation, etc., etc....

OTHER SIZES AVAILABLE RANGING FROM 40K TO 350K BTU:



WORLD PROVIDER OF INNOVATIVE HEATING SOLUTIONS

411 Mason Street, Onalaska, WI 54650
(800) 345 7200
(608) 783 5691
(608) 783 6115 fax
www.lbwhite.com

© 2020 L.B. White Co.
All rights reserved.
All specifications are subject
to change without notice.