

LOCK N LUBE®

Grease Coupler

LEAK FREE, HIGH PRESSURE SEAL
Patented design reduces leakage.

FOUR HARDENED SPRING STEEL JAWS

- Resilient under high pressure.
- Fits all DIN and SAE specification Zerk grease nipples.


SLIDING SLEEVE

Locks the coupler onto the Zerk. When you pump grease ... it stays on!

SPRING LOADED THUMB LEVER

- Simply push the trigger to lock the coupler onto the Zerk or to release the coupler when done.
- Easy release, regardless of pressure build up in the line. NO MORE stuck couplers.
- No need to hold while greasing. Lock on and free up both hands to operate your grease gun.
- Textured thumb lever for a non-slip grip.

1/8" NPT FEMALE THREAD
Standard size, fits most grease guns.

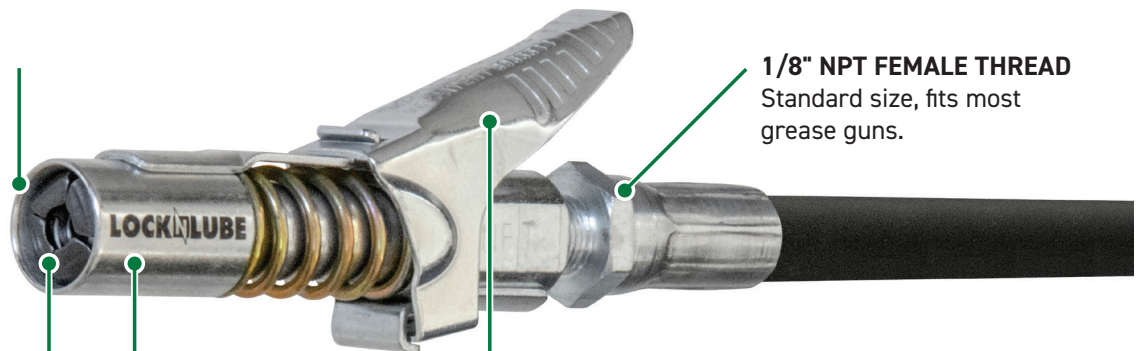

DESCRIPTION	SPECIFICATION
Max Pressure	10,000 psi (690 Bar)
Zerk Compatibility	Fits all DIN and SAE specification Zerks (grease nipples)
Coupler Thread	1/8" NPT female thread
Dimensions	L: 3 1/2" x W: 3/5" x H: 1 3/5" (L: 88 x W: 16.4 x H: 41 mm)
Diameter (front coupler)	5/8" in (16 mm). Fits most recessed Zerks (grease nipples)
Weight	4 oz (100 g)
Grease Gun Compatibility	Works with all grease gun types: pneumatic, manual and electric
Seal	Durable nitrile rubber seal for longevity under high pressure
Lock-on Mechanism	Four hardened spring steel jaws are resilient under high pressure
Patents	US Patent # 8,955,544



John M. Ellsworth Co., Inc.

P.O. Box 240072
8700 West Bradley Road
Milwaukee, WI 53224

800-333-3331 **PHONE**

info@jmesales.com **E-MAIL**
www.JMESales.com **WEB**