


715F

Remote Fill Box Series: IN-WALL, BACK CONNECTION

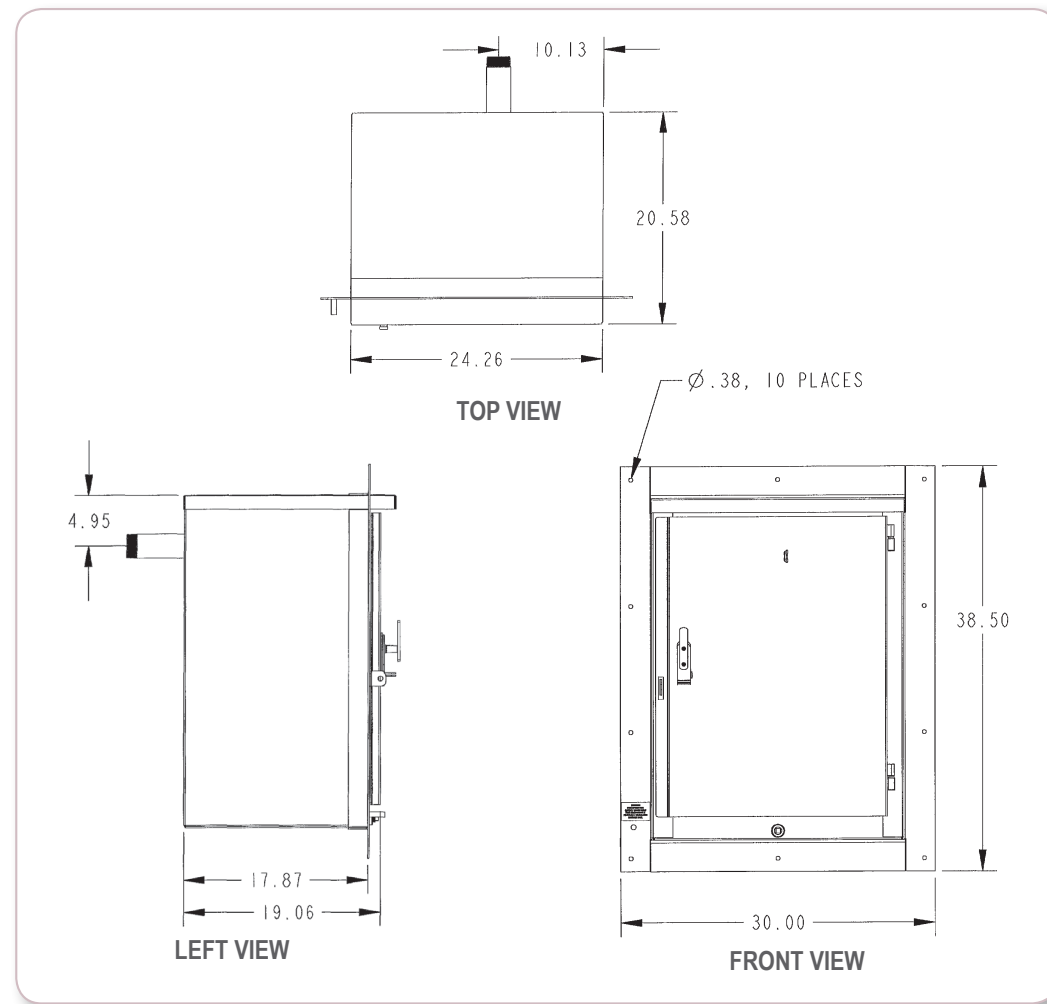

Rough opening dimensions for mounting

- Width = 24.875"
- Height = 33.375"



Florida DEP EQ-787



ULC
LISTED
CAN-ULC-S663-11

Features:

- 7-gallon (26.5 liter) capacity
- 14 gauge steel (powder coated white) or 304 stainless steel
- Pad-lockable
- Integral grounding stud
- Drain located in front center

External Options

← 715 **F** - **T K 2** - **2 Q B B** - **0** →

Model Number

Fill Box Construction

- F** 7-gal. powder coated flush wall mount
- S** 7-gal. 304 stainless steel

Mounting Style

- T** Tank/Wall

Connection Location

- K** Back

Connection Thread Size

- 2** 2" Male NPT nipple

Component Size

- 2*** 2" components
- * 2" transition between outlet fitting and ball valve.*

Internal Options

- Open**
- 0** Box only

Hand Pump Assembly

- 0** No hand pump assembly
- B** Base Package*

** Hand Pump Assembly Base Package: Steel constructed hand pump with Teflon seals and Viton o-rings, reinforced polyurethane tubing, brass check valve and ball valve.*

- E** E85 Package

** Hand Pump Assembly E85 Package: Steel constructed hand pump with Teflon seals and Viton o-rings, reinforced polyurethane tubing, stainless steel check valve and ball valve.*

- S** Stainless Steel Package

** Hand Pump Assembly Stainless Steel Package: Stainless steel constructed hand pump with Teflon seals and Viton o-rings, reinforced polyurethane tubing, stainless steel check valve and ball valve.*

B E



S



B



691 Ball Valve

S



691BSS Ball Valve

Ball Valve

- 0** Box only
- B** Full port NPT ball valve with brass body, hard chrome plated ball & Teflon seals
- S** Full port, locking, NPT ball valve with stainless steel body and ball, Teflon seals

Inlet Connection

- 0** Box only
- D** Dry disconnect, hardcoated aluminum with stainless steel piston, Viton gaskets, and aluminum dust cap
- E** Dry disconnect, stainless steel body and piston, Viton gasket, and stainless steel dust cap (only available in 2")
- Q** 90° quick disconnect aluminum female coupler with brass check valve, Viton seals, and aluminum dust plug
- S** 90° quick disconnect stainless steel coupler with check valve, Viton seals, and aluminum dust plug
- M** 90° quick disconnect aluminum male adaptor with stainless steel check valve, Viton seals, and aluminum dust cap

Dry Disconnect

D



927

E



927S

Quick Disconnect

M



Q

S



715F-TK2



- ◆ 7-gallon (26.5 liter) capacity
- ◆ 14 gauge steel (powder coated white)
- ◆ 2" back connection
- ◆ In-wall flush mount

**See back page for dimensions.*

715FS-TK2



- ◆ 7-gallon capacity (26.5 liter)
- ◆ 304 stainless steel
- ◆ 2" back connection
- ◆ In-wall flush mount

**See back page for dimensions.*

Item Number	Size	Description	Weight (lbs)
715F-TK2-0000-0	2"-7 gal.	In-wall, back connection w/ no internal components	120.0
715F-TK2-2QBB-0	2"-7 gal.	In-wall, back connection w/2" AL female QD coupler, BR ball valve, hand pump	162.0
715F-TK2-2MBB-0	2"-7 gal.	In-wall, back connection w/2" AL male QD adaptor, BR ball valve, hand pump	162.0
715F-TK2-2DBB-0	2"-7 gal.	In-wall, back connection w/2" AL dry disc adaptor, BR ball valve, hand pump	160.0
715FS-TK2-2ES0	2"-7 gal.	In-wall, back connection w/2" SS dry disc adaptor, SS ball valve	129.0
715FS-TK2-2DBB	2"-7 gal.	In-wall, back connection w/2" AL dry disc adaptor, BR ball valve, hand pump	129.0
715FS-TK2-2SS0	2"-7 gal.	In-wall, back connection w/2" SS female QD coupler, SS ball valve	

**Consult Price List for additional options.*

**Option Q now has Viton seals (previously Buna seals)*