


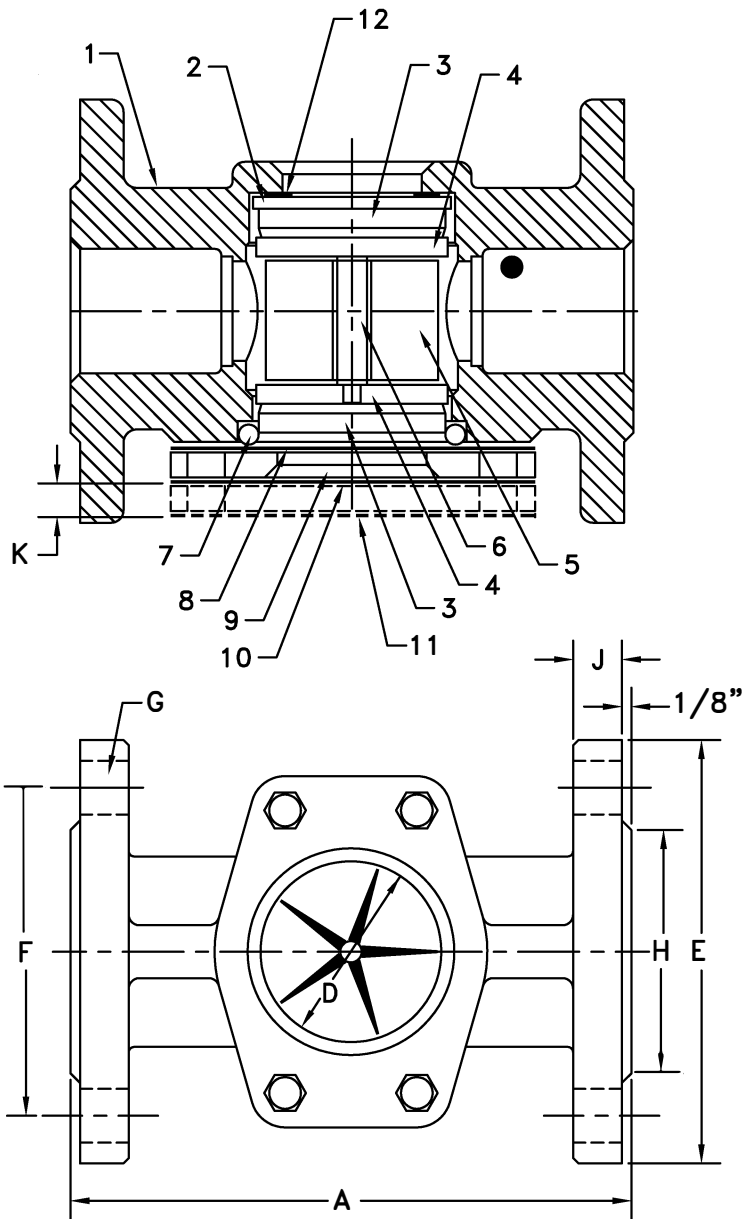


SERVICE RATINGS	MAX .PRESSURE	MAX. TEMP ¹
*1400 SERIES FLGD (6"-12")	150 PSI ●150°F	150°F ●150 PSI
*1400 SERIES THRD/FLG (1/4"-4")	200 PSI ●150°F	225°F ●150 PSI
*1500 SERIES FLGD (1"-12")	275 PSI ●100°F ²	350°F ●205 PSI ^{2,3}
*1500 SERIES THRD (1/4"-2")	400 PSI ●150°F	350°F ●200 PSI ³

- 1 WITH STD VITON SEALS
 2 STL UNITS RATED ● 285 PSI MAX. ● 100°, & 350° MAX. ●215 PSI
 3 TEMPERATURES UP TO 500°F POSSIBLE WITH SPECIAL HIGH TEMPERATURE SEALS (CONSULT FACTORY)

SIZE	1-1/2"	2"	COMMENTS
A	6-1/2"	7"	
D	2"	2"	
E	5"	6"	
F	3-7/8"	4-3/4"	
G	4 (5/8")	4 (3/4")	
H	2-7/8"	3-5/8"	
J	19/32"	11/16"	
K (SHIELD HT.)	1/2"	1/2"	
WEIGHT (LBS)	11.1	15	

PARTS LIST			
PART NO.	NAME OF PART	QTY	MATERIAL
1	BODY	1	SEE BELOW
2	SEAL	1	SEE BELOW
3	GLASS	2	STD
4	RETAINING BRIDGE	2	SST
5	INDICATOR	1	SEE BELOW
6	SHAFT	1	SST
7	O-RING SEAL	1	SEE BELOW
8	GASKET	1	SEE BELOW
9	CAP PLATED STL	1	STL
10	SST TAG	1	SST
11	SHIELD (OPTIONAL)	1	PLEXIGLASS
12	SPACER	1	TEFLON

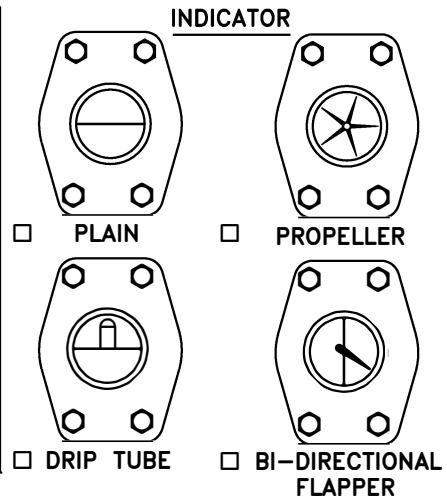

STANDARD DESIGN MATERIALS:

SERIES OF UNIT: ☐ 1500 (TEMPERED BOROSILICATE GLASS, RYTON INDICATOR STND.)
☐ 1400 (SODA LIME GLASS, DELRIN INDICATOR STND.)

METAL: ☐ ASTM A216 WCB CARBON STEEL
☐ ASTM A351 316L STAINLESS STEEL

OPTIONS: ☐ TEFLON INDICATOR
☐ SHIELD KIT

SEAL MATERIAL: ☐ VITON (STD)
☐ BUNA-N
☐ NEOPRENE
☐ EPT
☐ TEFLON

FLANGED VISI-FLO SFI



John M. Ellsworth Co., Inc.

P.O. Box 240072
 8700 West Bradley Road
 Milwaukee, WI 53224

800-333-3331 PHONE
 info@jmesales.com E-MAIL
 www.JMESales.com WEB