











NOZZLES

CUBE 70 B.SMART

FEATURES

- STURDY STRUCTURE
- · COMPACT DESIGN
- NATIVE WITH B.SMART CLOUD SOFTWARE
- IP55

The CUBE 70 B.SMART fuel dispenser, available in the 15GPM version with AC supply, is equipped with a self-priming vane pump with a built-in bypass that that ensures high performance. The anti-vibration support of the diesel dispenser guarantees silent operation and practicality, while the mechanical seal and the thermal protection of the induction motor against overheating makes the product reliable and safe. CUBE 70 B.SMART is equipped with an automatic nozzle with swivel connection. The installation of the mesh filter on the suction side ensures the pump longevity, as it prevents foreign bodies from ending up in the rotor and causing a blockage and consequent damage.

PERFORMANCE

UP TO
15 GPM
FLOW RATE

± 0.5%

ACCURACY











CUBE B.SMART

PACKAGING											
CODE	WEIGHT			N. BOXES / EUROPALLET							
	KG	LBS	ММ	INCH	PCS/BOX	×	4				
AC VERSION											
F00598500	24	53	380 X 380 X 4	15 X 15 X 18.9	1	-	-				













TANK MONITORING

HOSE REEL

ACCESSORIES

MERCHANDISE






















CHART

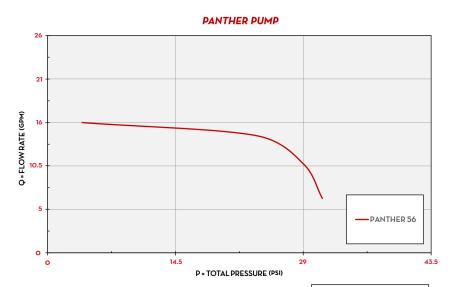

TYPE OF FLUID DIESEL
TEMPERATURE 48-68-42 °F

IN THE BOX

- · CUBE B.SMART DISPENSER
- AUTOMATIC NOZZLE
- DELIVERY HOSE
- DRIVER ACCESS ADD-ON
- INSTRUCTION MANUAL


DETAILS







DIMENSIONS (inches)



INCLUDES

- · PANTHER AC PUMP
- K600/3 METER
- · AUTOMATIC NOZZLE

TECHNICAL DATA													
CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE		PUMP	METER	NOZZLE	FILTER	INLET	HOSE	
			L/MIN	GPM	AC V./HZ VOLT		TYPE	TYPE	TYPE	H2O FILTER	NPT	LENGTH	Ø
AC VERSION													
E00598500	CURE 70 B SMADT 120V - 50 DDIVEDS		E4	15	120V	60 U7	DANTHED 56	K600/3	۸60	NO	1"	13ET	1"

CUBE 70 B.SMART