

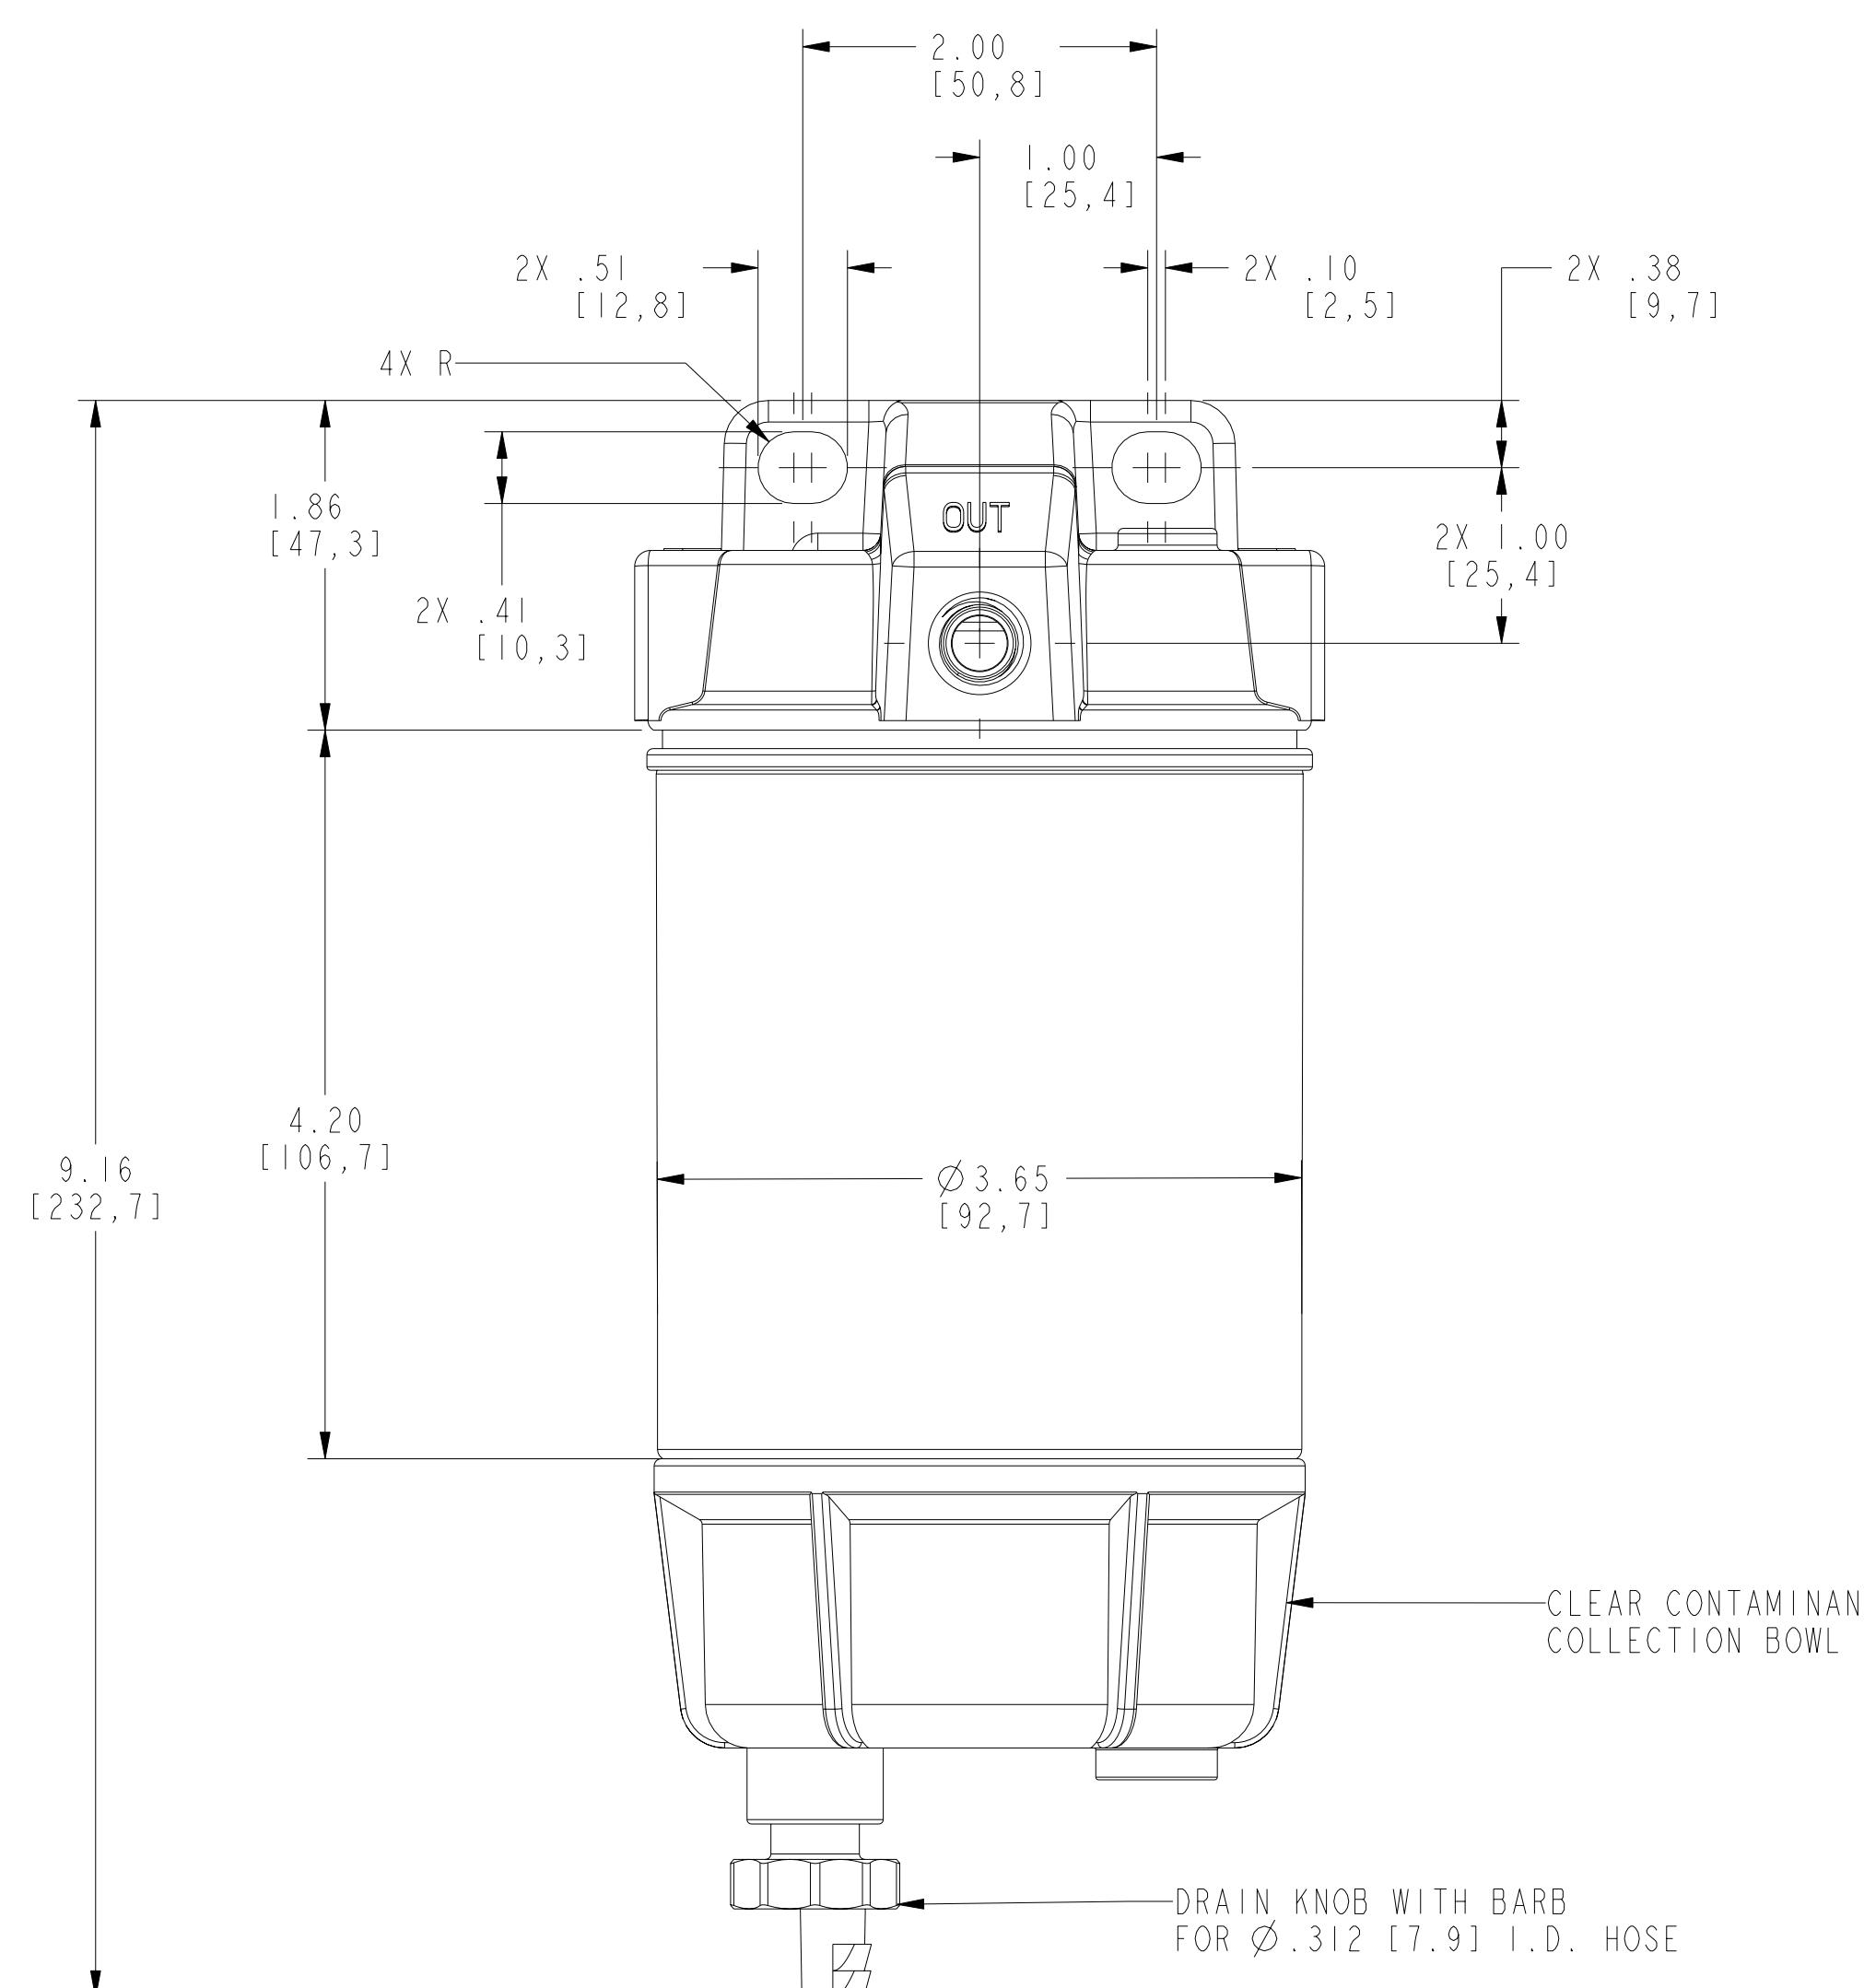
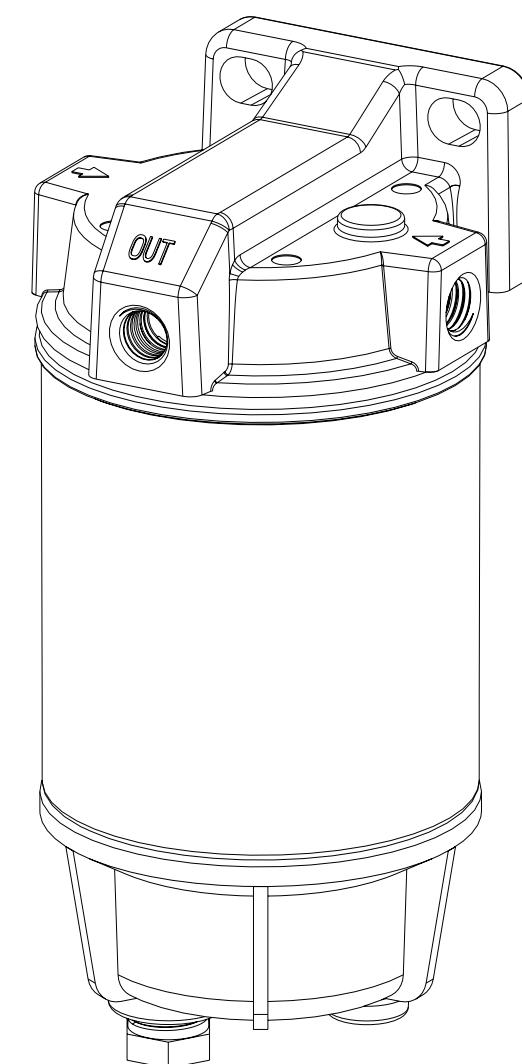


REVISIONS					
LTR	DESCRIPTION	EN	DATE	DRN	CHK
-	DRAWING RELEASE	-----	040595	DM	DM
A	REVISED NOTES AND UPDATED DRAIN VIEW.	-----	011800	GG	GG
B	REDRAWN ON PRO/E TO CURRENT SPECIFICATIONS. REVISED AND RENUMBERED NOTES. ADDED COMPONENT CALLOUTS.	19722	101507	CEV	RH

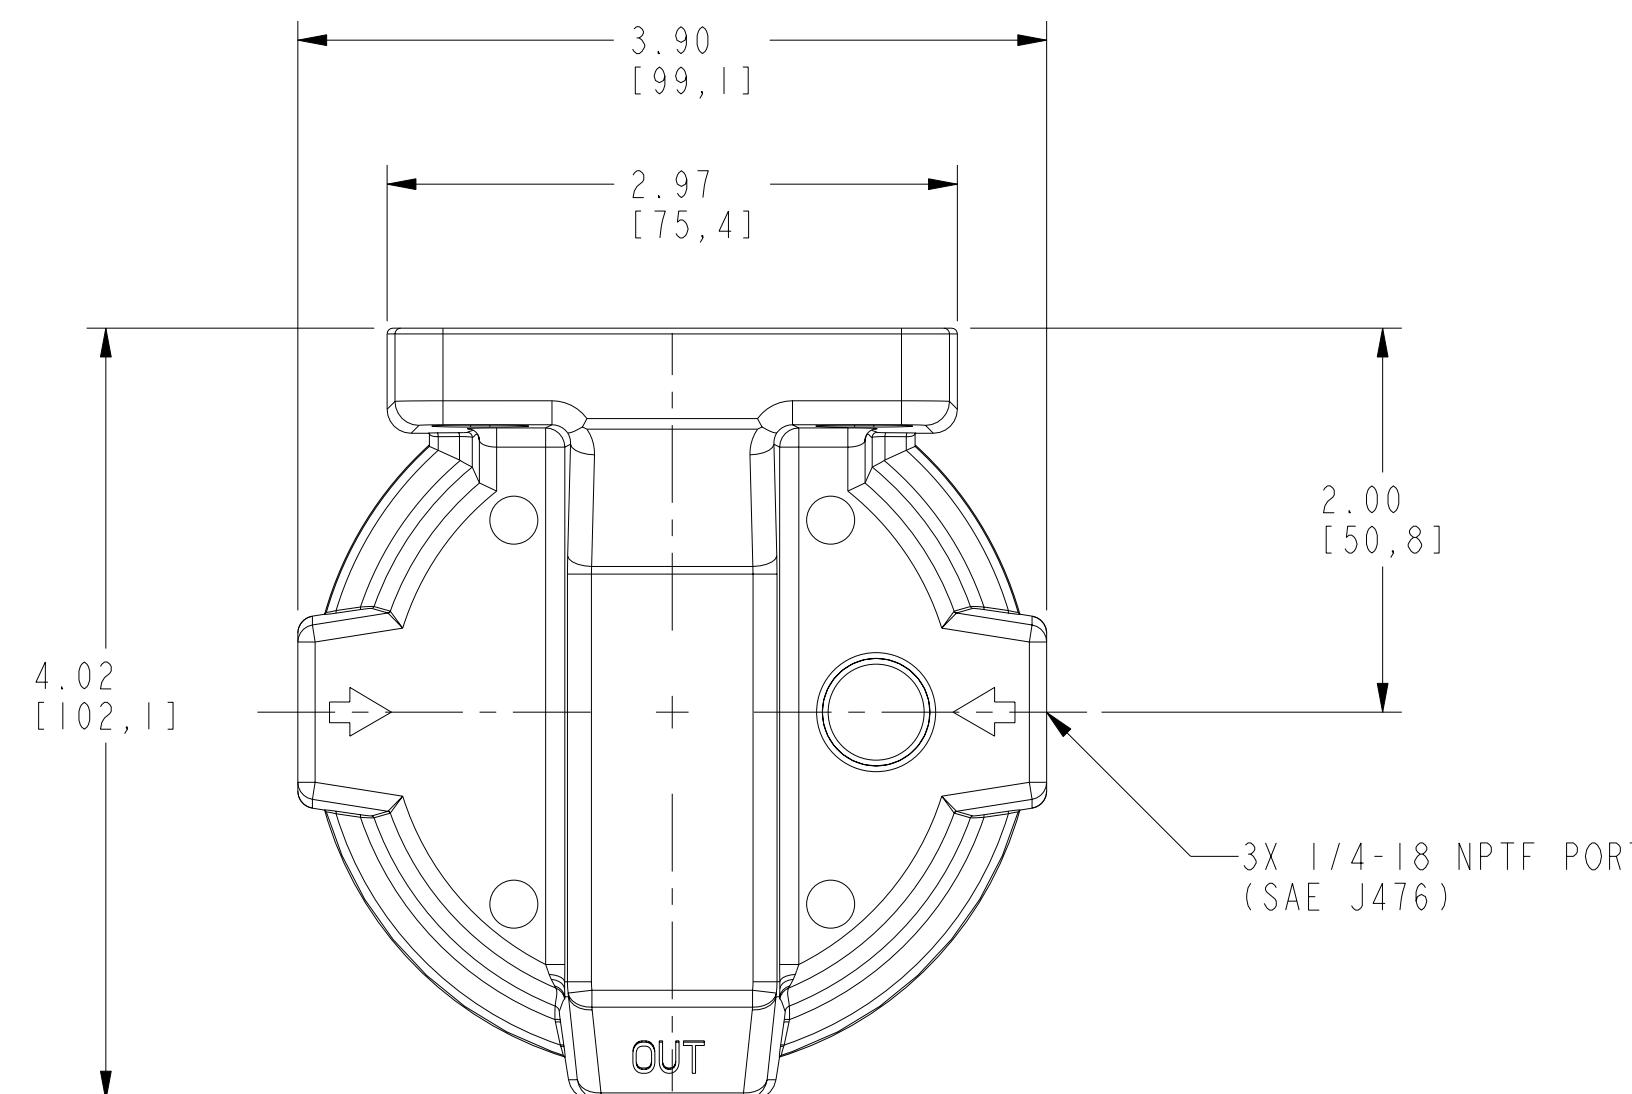

NOTE: BOWL ORIENTATION MAY VARY

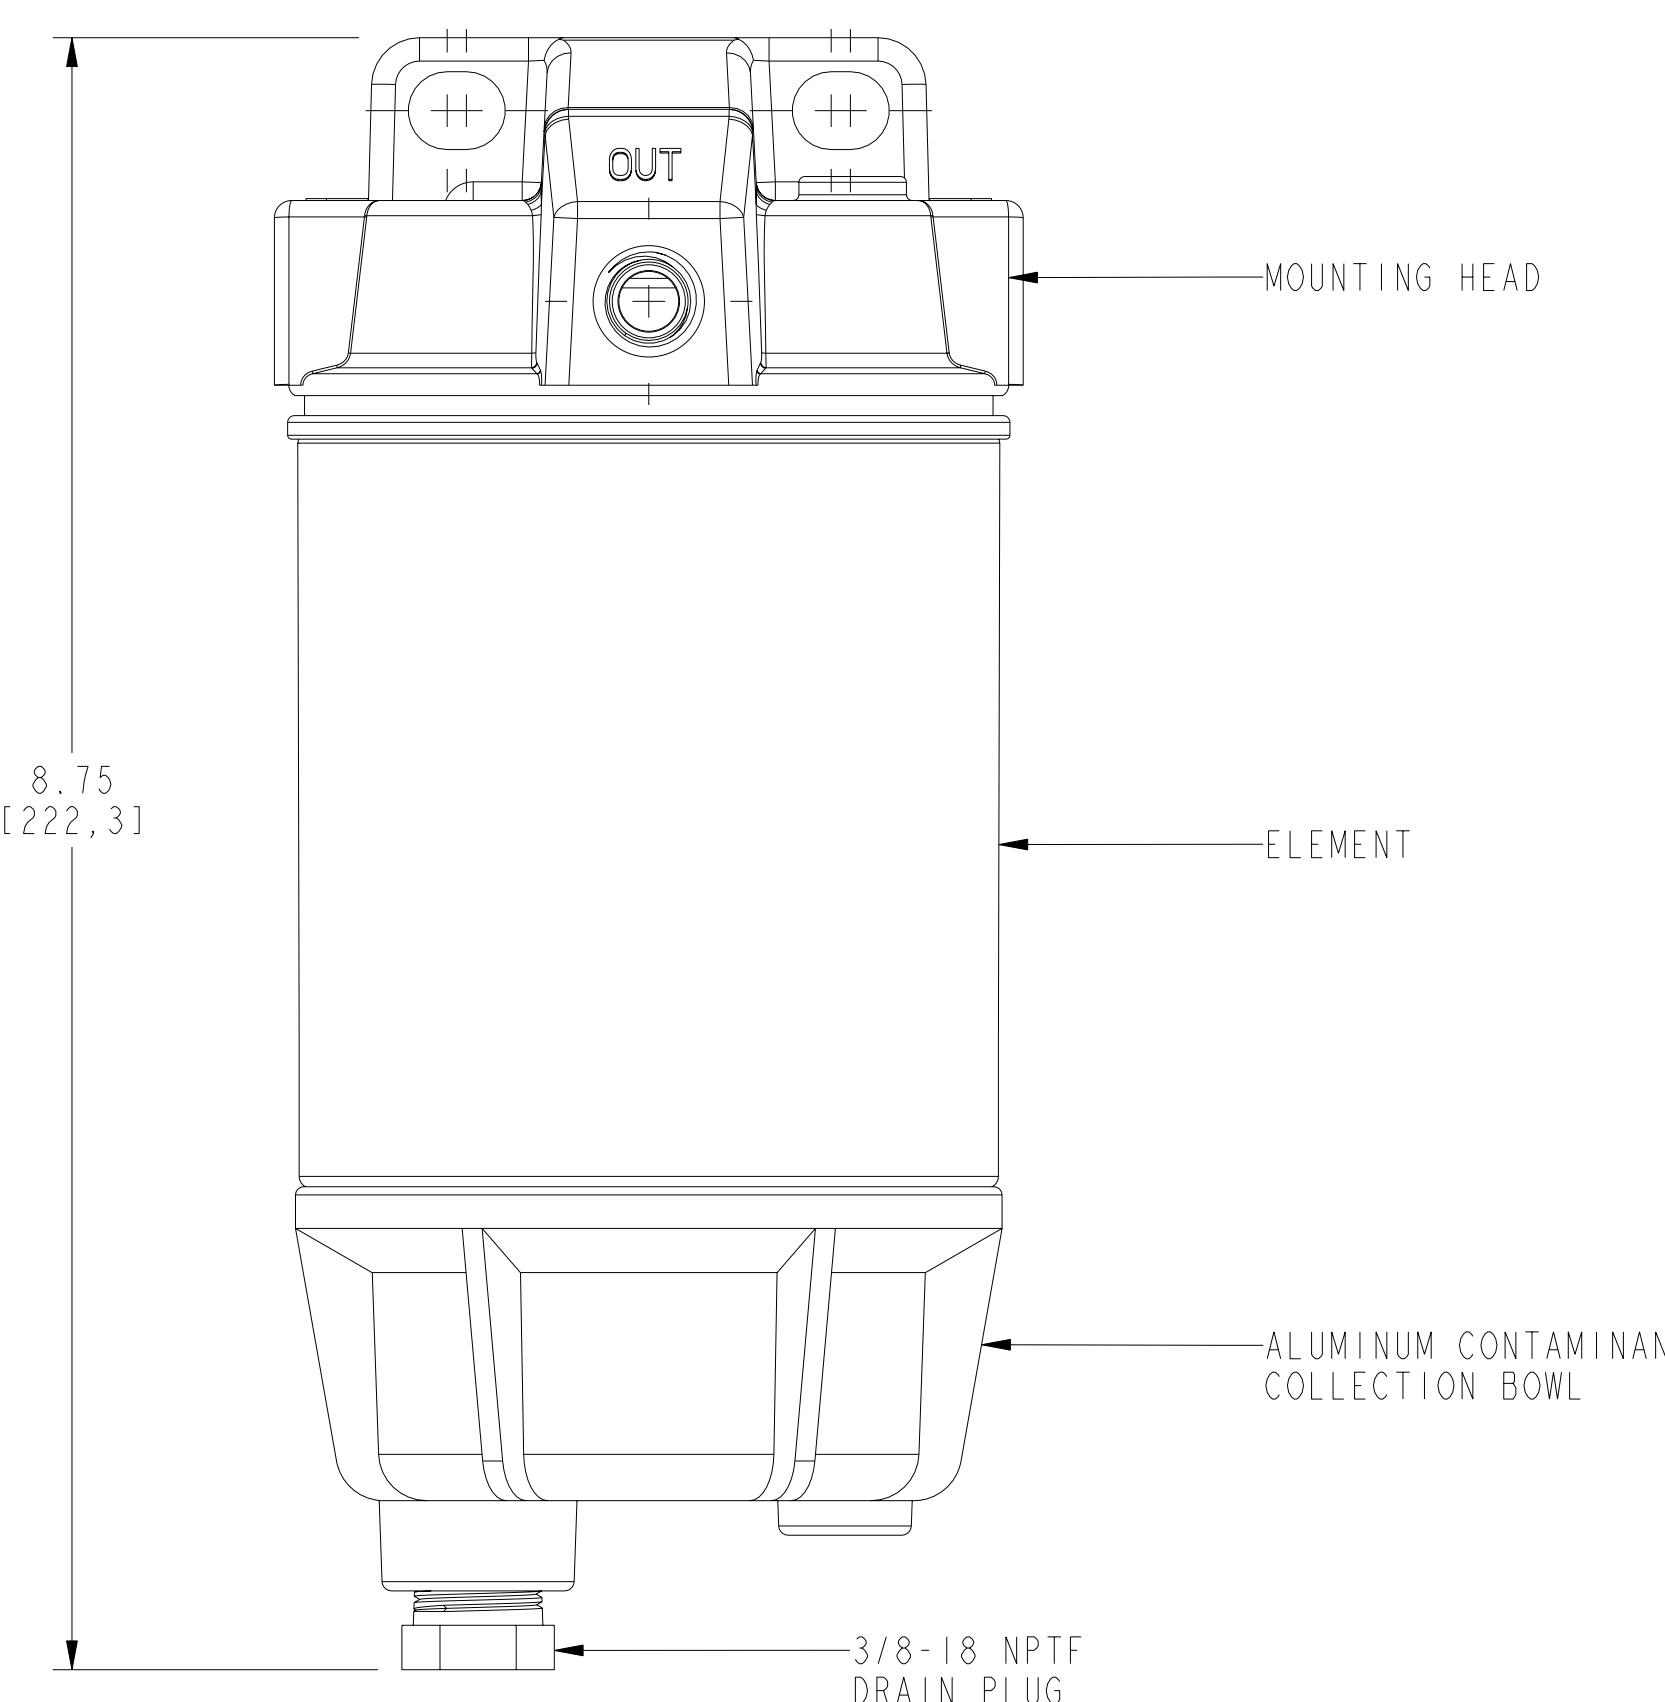

NOTES: UNLESS OTHERWISE SPECIFIED-

1. DIMENSIONS GIVEN REPRESENT NOMINAL VALUES AND ARE FOR REFERENCE ONLY. SCHEME: INCH [MM]
2. SPECIFICATIONS:
 - A. APPLICATION: GASOLINE (OR DIESEL), VACUUM SIDE
 - B. MAXIMUM ALLOWABLE PRESSURE: 7 PSI / 48 kPa
 - C. MAXIMUM FLOW RATE: 60 GPH / 227 LPH
 - D. FUEL PORT THREADS: 1/4-18 NPTF
 - E. BOWL WATER CAPACITY: 2.0 OZ. [58 ML]
 - F. ALLOW AT LEAST 2 INCHES [51 MM] UNDER UNITS FOR SERVICE.
3. FEATURES:
ALUMINUM MOUNTING HEAD AND ALUMINUM BOWL FEATURE AN ANODIZED BASE COAT AND WHITE EPOXY POWDER PAINT TOP COAT FOR INCREASED CORROSION PROTECTION.
4. SERVICE PARTS:
ELEMENTS:
-320R-RAC-01: S3227 (10 MICRON)
-320R-RAC-02: S3228-UL (10 MICRON)

MOUNTING HEAD: RK20180
CLEAR BOWL: RK30475 (INBOARD USE ONLY)
5. PACKAGING:
STANDARD PACKAGING IS A CASE QUANTITY OF SIX.

CUSTOMER INTERFACE DRAWING

REVISE ONLY ON Pro/E SYSTEM	DRAWN	DBM	DATE 040595
THIS PRINT SUPERSEDES ANY EARLIER DATE; DESTROY SAME	CHECK	DBM	040595
MATERIAL:	-----		
DESIGN	-----		
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES			
TOLERANCES			
DECIMAL	ANGULAR		
.XX±	±		
.XXX±	±	FRACTIONAL	±
FINISH:			
NEXT ASSY	FIRST USED ON	-----	
APPLICATION			
DO NOT SCALE DRAWING			
SIZE D	CODE IDENT NO. 55752	DWG. NO. 320R-RAC-XX	REV B
SCALE 1.000 RELEASE DATE 040595 SHEET 1 OF 1			

RACOR®
PARKER HANNIFIN CORPORATION
RACOR DIVISION
P.O. BOX 3208
MODESTO, CA 95353

FF/WS ASSEMBLY
320R MARINE SERIES