

## Medium Duty Spring Retractable Reels

**Air/Water** - 1/4", 3/8", 1/2" I.D.



- Spool is constructed from a rugged engineered plastic
- Individually powder coated components offer maximum protection from premature corrosion
- The steel guide arm and base are stamped with ribs and gussets to ensure maximum strength and lightest possible weight
- Widened ratchet and latch pawl design greatly reduces wear and increases service life
- The industrial-grade drive spring completely containerized and permanently sealed
- Inlet hose is plumbed into the base to eliminate the risk of undue stress on the swivel
- Guide arm adjusts to seven positions



RT650-OLP




RT605-OLP



RT650-OLP

## New Spool Material and Design!

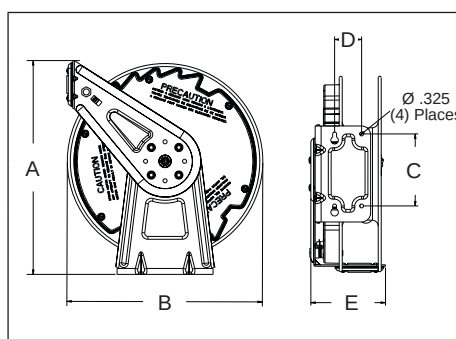

### Dimensions

|          | 1                              |     | 2                              |     |
|----------|--------------------------------|-----|--------------------------------|-----|
|          | in                             | mm  | in                             | mm  |
| <b>A</b> | 17 <sup>7</sup> / <sub>8</sub> | 454 | 17 <sup>7</sup> / <sub>8</sub> | 454 |
| <b>B</b> | 16 <sup>1</sup> / <sub>2</sub> | 419 | 16 <sup>1</sup> / <sub>2</sub> | 419 |
| <b>C</b> | 6                              | 152 | 6                              | 152 |
| <b>D</b> | 2 <sup>1</sup> / <sub>4</sub>  | 57  | 2 <sup>1</sup> / <sub>4</sub>  | 57  |
| <b>E</b> | 6 <sup>1</sup> / <sub>4</sub>  | 159 | 7 <sup>3</sup> / <sub>4</sub>  | 197 |

| Model with<br>hose & bumper  | Shipping<br>Weight |    | Hose<br>I.D.                                                                  |    | Hose<br>O.D. |    | Hose<br>Length |    | *Max<br>Pressure |     | NPT(M)<br>Hose Outlet | NPT(F)<br>Reel Inlet | NPT(F)<br>Reel Outlet | Size<br>Index # |
|------------------------------|--------------------|----|-------------------------------------------------------------------------------|----|--------------|----|----------------|----|------------------|-----|-----------------------|----------------------|-----------------------|-----------------|
|                              | lbs                | kg | in                                                                            | mm | in           | mm | ft             | m  | psi              | bar | in                    | in                   | in                    |                 |
| Low Pressure Air/Water Reels |                    |    | Maximum Temperature 150 °F (65 °C) *Maximum working pressure at 70 °F (20 °C) |    |              |    |                |    |                  |     |                       |                      |                       |                 |
| RT425-OLP                    | 19                 | 9  | 1/4                                                                           | 6  | .475         | 12 | 25             | 8  | 300              | 21  | 1/4                   | 3/8                  | 1/4                   | 1               |
| RT435-OLP                    | 21                 | 10 | 1/4                                                                           | 6  | .475         | 12 | 35             | 11 | 300              | 21  | 1/4                   | 3/8                  | 1/4                   | 1               |
| RT450-OLP                    | 24                 | 11 | 1/4                                                                           | 6  | .475         | 12 | 50             | 15 | 300              | 21  | 1/4                   | 3/8                  | 1/4                   | 1               |
| RT625-OLP                    | 20                 | 9  | 3/8                                                                           | 10 | .600         | 15 | 25             | 8  | 300              | 21  | 1/4                   | 3/8                  | 1/4                   | 1               |
| RT635-OLP                    | 21                 | 10 | 3/8                                                                           | 10 | .600         | 15 | 35             | 11 | 300              | 21  | 1/4                   | 1/2                  | 1/4                   | 1               |
| RT650-OLP ★                  | 27                 | 12 | 3/8                                                                           | 10 | .600         | 15 | 50             | 15 | 300              | 21  | 1/4                   | 1/2                  | 1/4                   | 1               |
| RT835-OLP                    | 27                 | 12 | 1/2                                                                           | 13 | .750         | 19 | 35             | 11 | 300              | 21  | 1/2                   | 1/2                  | 1/2                   | 1               |
| RT850-OLP                    | 37                 | 17 | 1/2                                                                           | 13 | .750         | 19 | 50             | 15 | 300              | 21  | 1/2                   | 1/2                  | 1/2                   | 2               |

Reels supplied with PVC hose.

| Model<br>without hose &<br>bumper                                    | Shipping<br>Weight |    | Hose Capacity |    |      |    |        |    | Max<br>Pressure |     | NPT(F)<br>Reel Inlet | NPT(F)<br>Reel Outlet | Size<br>Index # |
|----------------------------------------------------------------------|--------------------|----|---------------|----|------|----|--------|----|-----------------|-----|----------------------|-----------------------|-----------------|
|                                                                      |                    |    | I.D.          |    | O.D. |    | Length |    |                 |     |                      |                       |                 |
|                                                                      | lbs                | kg | in            | mm | in   | mm | ft     | m  | psi             | bar | in                   | in                    |                 |
| Low Pressure Air/Water Reels      Maximum Temperature 150 °F (65 °C) |                    |    |               |    |      |    |        |    |                 |     |                      |                       |                 |
| RT405-OLP                                                            | 21                 | 10 | 1/4           | 6  | .475 | 12 | 50     | 15 | 300             | 21  | 3/8                  | 1/4                   | 1               |
| RT605-OLP                                                            | 22                 | 10 | 3/8           | 10 | .600 | 15 | 50     | 15 | 300             | 21  | 1/2                  | 1/4                   | 1               |
| RT802-OLP                                                            | 27                 | 12 | 1/2           | 13 | .750 | 19 | 35     | 11 | 300             | 21  | 1/2                  | 1/2                   | 1               |
| RT805-OLP                                                            | 25                 | 11 | 1/2           | 13 | .750 | 19 | 50     | 15 | 300             | 21  | 1/2                  | 1/2                   | 2               |



**Pivot Bases & Swing Brackets**  
See page 39

Models with a ★ icon are our most popular models.