


Reotemp RTD Assembly

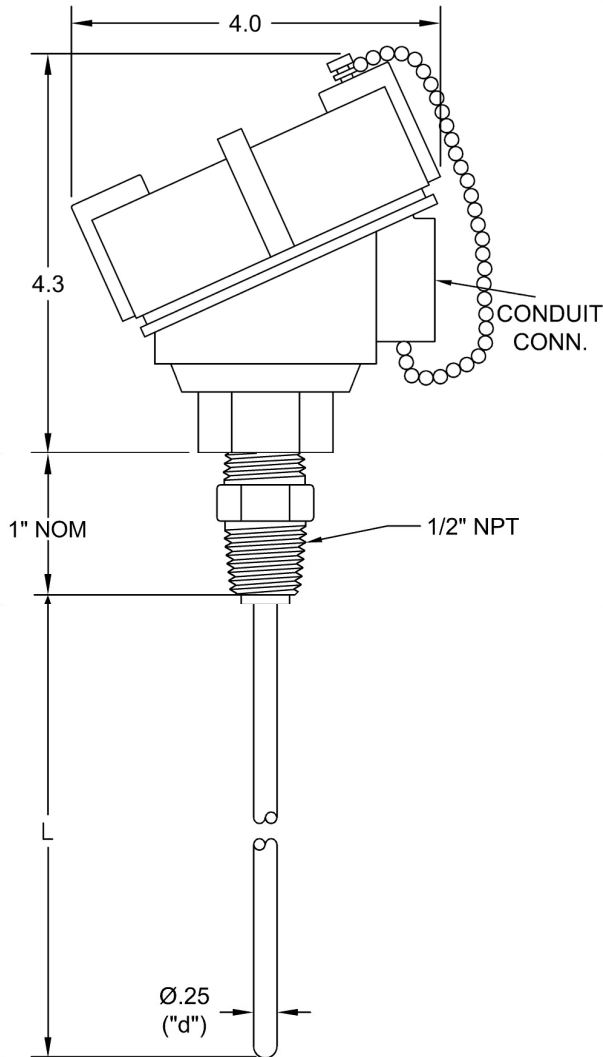

Part#: E-1T-PX1256X

Description:

RTD Assembly, with Explosion Proof Aluminum (FM, FMC, CSA) Head, Spring-loaded 316SS Bushing, 1/2" NPT, 3-wire Single (Standard), Std temp RTD (Pt/385/ Class B (Standard), 100 ohm), 1/4" dia. X 6 in. long, 316SS stem

Head Data:

<i>Description:</i>	Explosion Proof Aluminum (FM, FMC, CSA)
<i>Material:</i>	Cast Aluminum
<i>Color:</i>	Gray
<i>Conduit Conn. "P":</i>	3/4"NPT Conduit
<i>NEMA/IP rating:</i>	Nema 4X/IP68
<i>Hazardous Area Approval:</i>	Class I, Div 1, Grps B,C,D Class II, Div 1, Grps E,F,G
<i>By:</i>	FM, FMC

In- Head: Ceramic Terminal Block

Power In:

Signal Out:

Protocol:

Approvals:

Note:

Process Connection:

Spring-loaded 316SS Bushing, 1/2" NPT
(Thermowell Required. Stem retracts nominal 1/2" max in well.)

Stem Data:

<i>Stem Length "L":</i>	6 in.
<i>Stem "D" (in.):</i>	1/4"
<i>Stem Jacket Material:</i>	316SS
<i>Min. Recommended Immersion (without thermowell):</i>	2.5"

Sensor Data:

<i>Sensor:</i>	RTD
<i>Resistance @ 0°C:</i>	100 ohm
<i>Tolerance Class (IEC 60751):</i>	B
<i># Sensors:</i>	Single
<i>Temperature Range:</i>	Std. Range: -328F to 400F (-200C to 204C)

Revision Status:	Data generated on: 1/24/2020
<i>Latest Revision:</i>	x3
<i>Revision Date:</i>	12/1/2015
<i>Description:</i>	Stm length

*Revision date applies to all possible data: Individual drawings may not be affected. To obtain current revision, re-generate drawing at www.reotemp.com

Dimensions are in inches.

Consult factory for critical dimensions.

Copyright © 2013
REOTEMP Instruments

REOTEMP Instrument Corporation
10656 Roselle Street
San Diego, CA 92121 USA
Phone: (858) 784-0710
Fax: (858) 784-0720

THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF REOTEMP INSTRUMENT CORP., AND ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF ITEMS DEPICTED HEREIN WITHOUT WRITTEN PERMISSION FROM REOTEMP INSTRUMENT CORP.

Made in U.S.A.

DRAWN BY:
JR
SIZE:
B
CAGE CODE:
24793

SCALE:
NTS
SHEET:
1 OF 1