

# OIL PUMPS: PUMPMASTER 2 – 3:1



## Medium Pressure Utility Pump

Double-acting air-operated medium pressure utility oil pumps for dispensing lubricants from portable units, tank packages and small systems. Pumps include a height adjustable 2" bung adaptor for tank or drum bung mounting. Built in pressure relief port for the optional, but recommended, pressure relief valve (609 007)

### Reliable air motor

Unique leaf spring design. Corrosion resistant materials and fewer moving parts provide longer pump life

### Metal seal carrier

Allows a compact pump design, minimizing dead air spaces and thus contributing to reduced air consumption and prolonged pump life

### Long life packings

Dual packing seals provide trouble-free operation

### Hardened steel foot valves

Increase durability and constant performance through the life of the pump

### Spring assisted valves

Allows horizontal or vertical pump installation

### Double acting pump

Provides even and smooth fluid flow

### Built-in port for connecting a pressure relief valve

Positive relief of overpressure caused by thermal expansion using an optional, inexpensive, and recommended, pressure relief valve (609 007)

### Adaptor included



Adaptor 2065 3/4"M x 1/2"F is included with the pump. Adaptor allows the PumpMaster 2 3:1 pump to be fitted with a standard 1/2" delivery hose

**MARKETS SERVED**

- Auto dealers
- Service shops
- Fast lube centers
- Agriculture

**FLUIDS HANDLED**

- Synthetic and mineral based oil
- Hydraulic oil
- Gear lube
- Transmission fluid

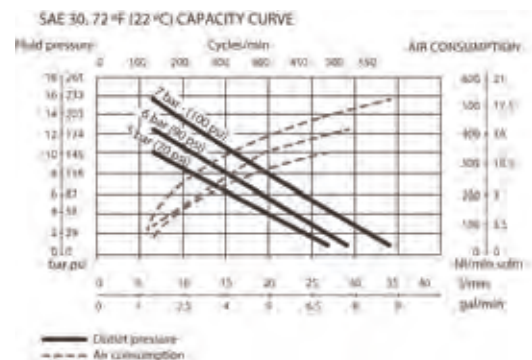

IN (MM)	353 120	358 120	354 120	213	260
<b>A</b>	19 1/2" (495)	39" (995)	47" (1.200)	59 1/2" (1.510)	71 1/2" (495)
<b>B</b>	11 1/2" (295)	11 1/2" (295)	11 1/2" (295)	11 1/2" (295)	11 1/2" (295)
<b>C</b>	1 1/4" (34)	1 1/4" (34)	1 1/4" (34)	1 1/4" (34)	1 1/4" (34)
<b>D</b>	8" (200)	27 1/2" (700)	35 1/2" (905)	48" (1.215)	60" (1.520)