

Replacement Elements

35 - 6600 SCFM Flow Range

Features

- Pleated media for high dirt holding capacity
- Polyester: reinforced with epoxy coated steel wire on both sides of cloth, expanded metal I.D.
- Paper: heavy duty industrial strength paper surrounded by heavy gauge galvanized expanded metal
- 40 - 50% increased dust loading capacity with prefilter (part number suffix P)

Technical Specifications

- Polyester: 99+% removal efficiency to 5 micron
- Paper: 99+% removal efficiency to 2 micron
- Temp (continuous): min -15°F (-26°C), max 220°F (104°C)
- Filter change out differential: 15-20" H₂O over initial ΔP



Paper Elements

Polyester Media Benefits/Specs

- Less maintenance due to longer durability
- Moisture resistant
- Handles hot air and oil mist from unload cycle of reciprocating/piston compressor
- Washable with lukewarm water and mild detergent*

Paper Media Benefits/Specs

- Cost effective
- Gently blow out media*




Polyester Elements

Rev: Std. Element-US0220K

35 - 6600 SCFM Flow Range

Endcap Information

- M = Molded plastisol
- B = Closed one end with bolt hole, open on other end
- G = Galvanized metal endcaps
- N = Neoprene blended gasket on open endcaps

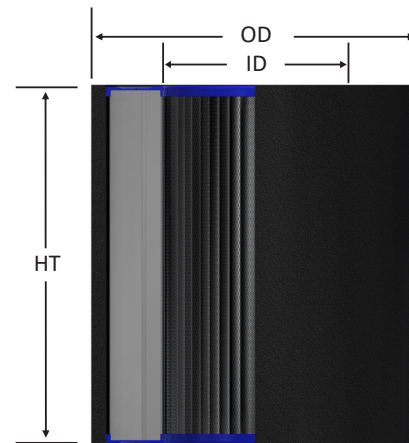

Replacement Elements up to 300 SCFM flow

Element Part Number		Element SCFM Rating	Surface Area ft ²		Dimensions - inches			Std. Endcap Features
Polyester	Paper		Polyester	Paper	I.D.	O.D.	H.T.	
15P	14P	35	0.50	1.12	3	4 ³ / ₈	2 ⁵ / ₁₆	M
19P	18P	100	1.50	3.00	3	4 ³ / ₈	4 ³ / ₄	M
31P	30P	195	2.30	6.20	3 ⁵ / ₈	5 ³ / ₄	4 ³ / ₄	M
35P	34P	275	4.00	11.00	4 ³ / ₄	7 ⁷ / ₈	4 ¹³ / ₁₆	M
231P	230P	300	4.50	11.80	3 ⁵ / ₈	5 ³ / ₄	9 ¹ / ₂	M

Note: Also available in wire mesh. Example part number for wire mesh: 230S
See Element Technical Data for maintenance guidelines.

Replacement Elements up to 6600 SCFM flow

Element Part Number		Element SCFM Rating	Surface Area ft ²		Dimensions - inches			Std. Endcap Features
Polyester	Paper		Polyester	Paper	I.D.	O.D.	H.T.	
235P	234P	570	8.3	22.8	4 ³ / ₄	7 ⁷ / ₈	9 ³ / ₈	M
335P	334P	800	12	34	4 ³ / ₄	7 ⁷ / ₈	14 ¹ / ₂	M
237	236	550	8.6	22.6	4 ¹¹ / ₁₆	7 ³ / ₄	8 ¹ / ₂	GBN
239P	238P	570	13	48	4 ⁷ / ₈	9 ¹ / ₄	10.5	GBN
2541	2540	800	15.1	35.1	6	9	11 ⁵ / ₈	G
245P	244P	880	14	35.5	6	9 ³ / ₄	9 ⁵ / ₈	GN M
345P	344P	1100	22.1	57	6	9 ³ / ₄	14 ¹ / ₂	GN
275P	274P	1100	19	45.4	8	11 ³ / ₄	9 ⁵ / ₈	GN
375P	374P	1500	28	68.1	8	11 ³ / ₄	14 ¹ / ₂	GN
377P	376P	1825	50	125	9	14 ⁵ / ₈	14 ¹ / ₂	GN
385P	384P	3300	50	140	14	19 ⁵ / ₈	14 ¹ / ₂	GN
485P	484P	4705	75	200	14	19 ⁵ / ₈	21 ¹ / ₂	GN
685P	--	6600	100	--	14	19 ⁵ / ₈	28 ¹ / ₂	GN

Note: Most are available in wire mesh. Example part number for wire mesh: 274S

Additional media available, contact factory or see Filter Media Specifications. See Element Technical Data for maintenance guidelines.

*Replacing element is recommended.



SOLBERG®

www.solbergmfg.com

All model offerings and design parameters are subject to change without prior notice.
Contact your representative or Solberg for the most current information.