


TT8900 Series

TTI's PowerGuard™ filter line leverages our proprietary DuoGlass media and world-class product design to ensure unparalleled filtration performance.


Manufactured in the USA and Germany, our Dual Phase Microglass technology provides Beta 2000 efficiencies with a built-in pre-filter layer to reduce initial pressure drops and extend the life of your filter elements.

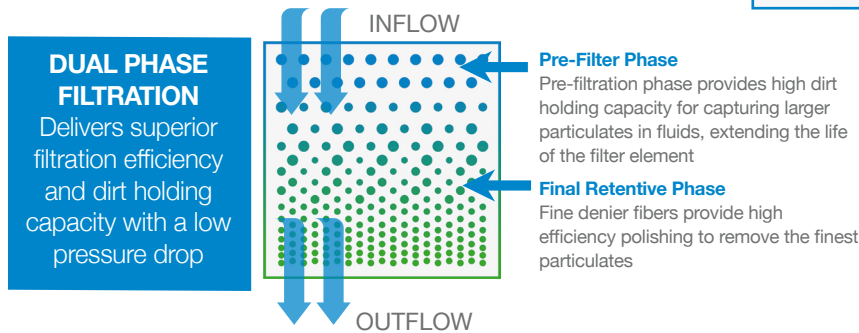

PERFORMANCE

- 150 PSID (10 Bar) collapse pressure
- 50 PSID (3.4 Bar) change out recommended
- 250°F (121°C) maximum operating temperature

Dimensions

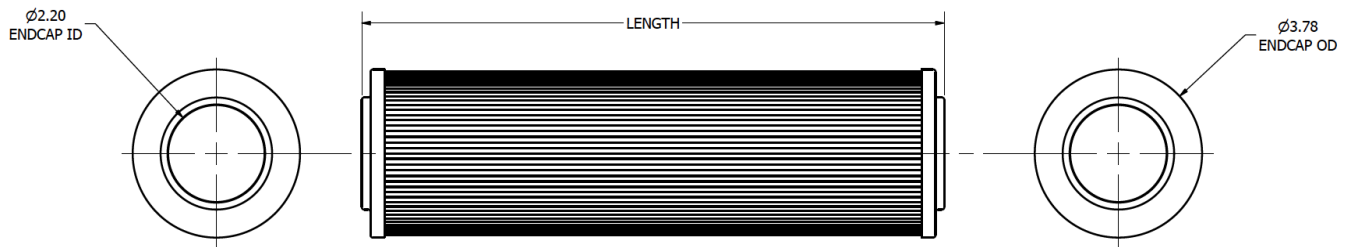

Part Number Builder

TTI PN	-	Length Inches [mm]	-	Micron Rating (µm)	Media Type	Seal Type	-	Spring
TT8900		8 = 8.22 [208]		1	40	(Omit) = Dual Phase Microglass <i>Standard option B2000, available in 1, 3, 6, 10, 25, 40µm</i>		Omit <i>No Spring</i>
		13 = 12.90 [327]		3	74*	WA = Water Absorptive <i>Available in 3, 6, 10, 25µm</i>		SP <i>With Spring</i>
		16 = 16.76 [425]		6	149*	SD = Static Dissipative <i>Viton seals only, available in 1, 3, 6, 10, 25µm</i>		
		26 = 25.70 [652]		10		*W = Stainless Steel Wire Mesh <i>Only available in nominally rated 25, 74, 149µm</i>		
		39 = 38.70 [983]		25				

PART NUMBER EXAMPLE: TT8900-13-3V = TT8900 (12.90 length, 3 micron, viton seal type)