



- Shrink Temp. 347°F
- Mil-I-DTL-23053/13
- Flame Retardant
- Resistant to Highly Corrosive Acids, Fluids, Fuels, & Solvents
- High Operating Temp. 392°F for Extreme Working Conditions

## 2:1 Viton® - Flexible Heatshrink Tubing

Viton® is a rubber-like, highly fluid-resistant, flame retardant fluoro-elastomer heat-shrinkable tubing with high solvent resistance. The product is recommended for bundling, harnessing, and environmental protection within engine compartments.

| Nominal Size | Part #    | Unshrunk Diameter | Shrunk Diameter | Standard Spool Put-Ups |            | Available Colors | Lbs/100' |
|--------------|-----------|-------------------|-----------------|------------------------|------------|------------------|----------|
|              |           |                   |                 | Bulk Spool             | Shop Spool |                  |          |
| 1/8"         | H2V0.13BK | 3.2mm             | 1.6mm           | 200'                   | 100'       | Black (BK)       | 1.26     |
| 3/16"        | H2V0.19BK | 4.8mm             | 2.4mm           | 200'                   | 100'       | Black (BK)       | 1.45     |
| 1/4"         | H2V0.25BK | 6.4mm             | 3.2mm           | 200'                   | 100'       | Black (BK)       | 1.68     |
| 3/8"         | H2V0.38BK | 9.5mm             | 4.7mm           | 200'                   | 100'       | Black (BK)       | 2.27     |
| 1/2"         | H2V0.50BK | 12.7mm            | 6.4mm           | 100'                   | 50'        | Black (BK)       | 2.29     |
| 5/8"         | H2V0.63BK | 16.0mm            | 8.0mm           | 100'                   | 50'        | Black (BK)       | 2.50     |
| 3/4"         | H2V0.75BK | 19.1mm            | 9.5mm           | 100'                   | 50'        | Black (BK)       | 4.14     |
| 7/8"         | H2V0.88BK | 22.4mm            | 11.0mm          | 50'                    | 25'        | Black (BK)       | 4.83     |
| 1"           | H2V1.00BK | 25.4mm            | 12.7mm          | 50'                    | 25'        | Black (BK)       | 5.73     |
| 1 1/4"       | H2V1.25BK | 31.7mm            | 15.7mm          | 50'                    | 25'        | Black (BK)       | 8.20     |
| 1 1/2"       | H2V1.50BK | 38.1mm            | 19.1mm          | 50'                    | 25'        | Black (BK)       | 8.80     |
| 2"           | H2V2.00BK | 50.8mm            | 25.4mm          | 50'                    | 25'        | Black (BK)       | 13.40    |

Viton® is a registered trademark of DuPont Performance Elastomers.



- Shrink Temp. 194°F
- Flame Retardant
- Resists Common Automotive Chemicals
- Easily Installs Over Connectors & Splices
- Excellent Electrical Properties
- Protects from Fluids, Moisture, & Corrosion

## 2:1, 3:1, 4:1, & 6:1 Dual Wall Adhesive Heatshrink Tubing

Dual wall adhesive-lined polyolefin heatshrink tubing is ideal for producing strong, weather tight seals on any heatshrink installation. During the application of heat from a heat gun or other heat source, the inner adhesive wall melts and flows, creating an adhesion layer to ensure a snug fit to your harness or connector. Adhesive lined heatshrink comes in 2:1, 3:1, 4:1, and 6:1 shrink ratio, and it is available in 4' sticks.



John M. Ellsworth Co., Inc.

P.O. Box 240072  
8700 West Bradley Road  
Milwaukee, WI 53224


800-333-3331 PHONE

info@jmesales.com E-MAIL  
www.JMEsales.com WEB

## Dual Wall Adhesive Heatshrink Tubing


### Shrinks to 1/2 its original diameter

| Nominal Size | Part #  | Unshrunk Diameter | Shrunk Diameter | Bulk Box Put Up/4' Pcs. | Shop Box Put Up/4' Pcs. | Available Colors | Lbs/10Pcs. |
|--------------|---------|-------------------|-----------------|-------------------------|-------------------------|------------------|------------|
| 1/8"         | H2A0.13 | 3.2mm             | 1.6mm           | 250                     | 25                      | CL,BK            | 0.17       |
| 1/4"         | H2A0.25 | 6.4mm             | 3.2mm           | 250                     | 25                      | CL,BK            | 0.32       |
| 3/8"         | H2A0.38 | 9.6mm             | 4.8mm           | 250                     | 25                      | WH,RD,BK         | 0.55       |
| 1/2"         | H2A0.50 | 12.7mm            | 6.4mm           | 200                     | 25                      | CL,WH,RD,BK      | 0.73       |
| 3/4"         | H2A0.75 | 19.1mm            | 9.6mm           | 80                      | 25                      | WH,RD,BK         | 1.15       |
| 1"           | H2A1.00 | 25.4mm            | 12.7mm          | 50                      | 25                      | WH,RD,BK         | 1.53       |
| 1 1/2"       | H2A1.50 | 38.1mm            | 19.1mm          | 15                      | 5                       | BK               | 2.50       |

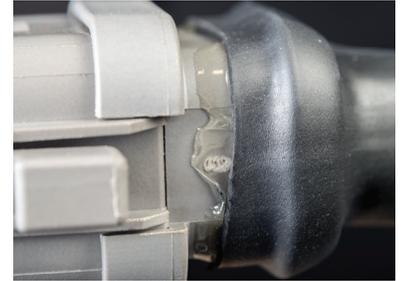

### Shrinks to 1/3 its original diameter

| Nominal Size | Part #  | Unshrunk Diameter | Shrunk Diameter | Bulk Box Put Up/4' Pcs. | Shop Box Put Up/4' Pcs. | Available Colors | Lbs/10Pcs. |
|--------------|---------|-------------------|-----------------|-------------------------|-------------------------|------------------|------------|
| 1/8"         | H3A0.13 | 3.0mm             | 1.0mm           | 250                     | 25                      | CL,WH,RD,BK      | 0.26       |
| 3/16"        | H3A0.19 | 4.8mm             | 1.5mm           | 250                     | 25                      | CL,WH,RD,BK      | 0.31       |
| 1/4"         | H3A0.25 | 6.0mm             | 2.0mm           | 250                     | 25                      | CL,WH,RD,BK      | 0.35       |
| 3/8"         | H3A0.38 | 9.0mm             | 3.0mm           | 250                     | 25                      | CL,WH,RD,BK      | 0.55       |
| 1/2"         | H3A0.50 | 12.0mm            | 4.0mm           | 200                     | 25                      | CL,WH,RD,BK      | 0.75       |
| 3/4"         | H3A0.75 | 19.0mm            | 6.0mm           | 80                      | 25                      | CL,WH,RD,BK      | 1.65       |
| 1"           | H3A1.00 | 24.0mm            | 8.0mm           | 50                      | 25                      | CL,WH,RD,BK      | 2.15       |
| 1 1/2"       | H3A1.50 | 38.0mm            | 13.0mm          | 25                      | 5                       | CL,WH,RD,BK      | 4.40       |
| 2"           | H3A2.00 | 50.0mm            | 17.0mm          | 15                      | 5                       | CL,WH,RD,BK      | 5.25       |

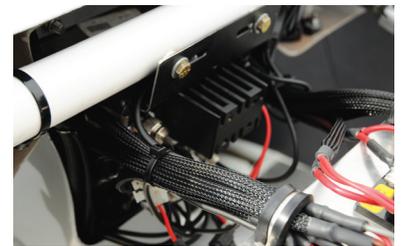

Seals and protects a wide variety of electrical applications, including wire splices, breakouts, and connectors-to-cable transitions.


### Shrinks to 1/4 its original diameter

| Nominal Size | Part #  | Unshrunk Diameter | Shrunk Diameter | Bulk Box Put Up/4' Pcs. | Shop Box Put Up/4' Pcs. | Available Colors | Lbs/10Pcs. |
|--------------|---------|-------------------|-----------------|-------------------------|-------------------------|------------------|------------|
| 3/16"        | H4A0.19 | 4.0mm             | 1.0mm           | 250                     | 25                      | CL,BK            | 0.30       |
| 5/16"        | H4A0.31 | 8.0mm             | 2.0mm           | 250                     | 25                      | CL,BK            | 0.44       |
| 1/2"         | H4A0.50 | 12.0mm            | 3.0mm           | 200                     | 25                      | CL,BK            | 0.90       |
| 3/4"         | H4A0.75 | 16.0mm            | 4.0mm           | 80                      | 25                      | CL,BK            | 1.50       |
| 1"           | H4A1.00 | 24.0mm            | 6.0mm           | 50                      | 25                      | CL,BK            | 2.60       |
| 1 1/4"       | H4A1.25 | 32.0mm            | 8.0mm           | 25                      | 5                       | CL,BK            | 3.50       |
| 2"           | H4A2.00 | 52.0mm            | 13.0mm          | 15                      | 5                       | CL,BK            | 8.00       |



### Shrinks to 1/6 its original diameter

| Nominal Size | Part #    | Unshrunk Diameter | Shrunk Diameter | Bulk Box Put Up/4' Pcs. | Shop Box Put Up/4' Pcs. | Available Colors | Lbs/10Pcs. |
|--------------|-----------|-------------------|-----------------|-------------------------|-------------------------|------------------|------------|
| 3/4"         | H6A0.75BK | 19.0mm            | 3.2mm           | 80                      | 25                      | BK               | 2.74       |
| 1 3/8"       | H6A1.38BK | 33.0mm            | 5.5mm           | 50                      | 25                      | BK               | 4.10       |
| 1 3/4"       | H6A1.75BK | 44.4mm            | 7.4mm           | 50                      | 25                      | BK               | 4.32       |
| 2"           | H6A2.00BK | 50.8mm            | 8.3mm           | 15                      | 5                       | BK               | 6.59       |
| 2 3/4"       | H6A2.75BK | 69.8mm            | 11.7mm          | 15                      | 5                       | BK               | 7.50       |
| 3 1/2"       | H6A3.50BK | 88.9mm            | 17.1mm          | 10                      | 5                       | BK               | 11.50      |
| 4 3/4"       | H6A4.75BK | 119.4mm           | 22.9mm          | 10                      | 5                       | BK               | 14.50      |

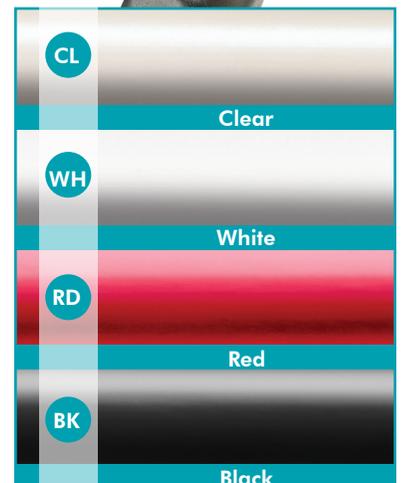

Contact your account representative for heatshrink cutting & printing services.