




SPIRALTECH® FUEL

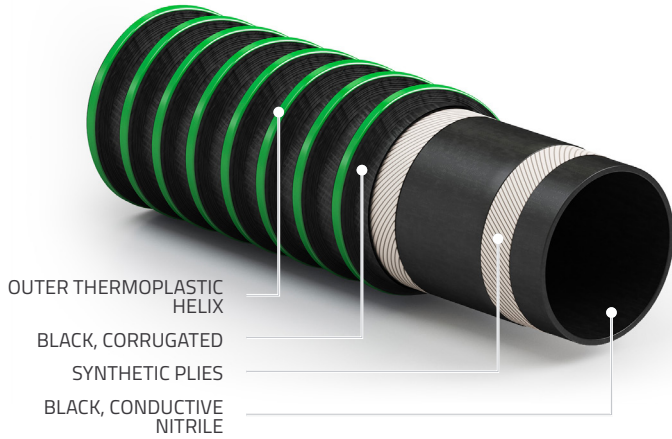

Light and flexible lorry collecting hose suitable for oil and petrol, aromatic content up to 50%.

DESCRIPTION

Tube

NBR, black, conductive

Reinforcement

synthetic plies, a/s wire to discharge static electricity

Cover

corrugated, black, with a green outer thermoplastic helix. Abrasion, ageing, ozone and oil resistant

TECHNICAL CHARACTERISTICS

Temperature range : -25°C / +80°C (-13°F / +176°F)

Norm : ISO 1307 for dimensional tolerances

Inside diameter		Outside diameter		Vacuum		Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[mm]	[in]	[bar]	[psi]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
38	1,50	-	-	0,9	13	10	150	30	450	1,17	0,78	80	3,15
51	2,00	-	-	0,9	13	10	150	30	450	1,57	1,05	100	3,94
63,5	2,50	-	-	0,8	11,5	10	150	30	450	1,90	1,27	130	5,12
76	3,00	-	-	0,8	11,5	10	150	30	450	2,30	1,54	150	5,91
102	4,00	-	-	0,7	10	10	150	30	450	2,97	1,99	200	7,87

Data refer to ambient temperature (20°C). Other diameters, wall thickness, cover colours and pressure only on specific request.

REV-2018-04-01