


1" DRY-SHUT SYSTEM

AUTO SHUT-OFF POLYPROPYLENE COUPLING

NEW
ENGINEERED
SEALING
FACE

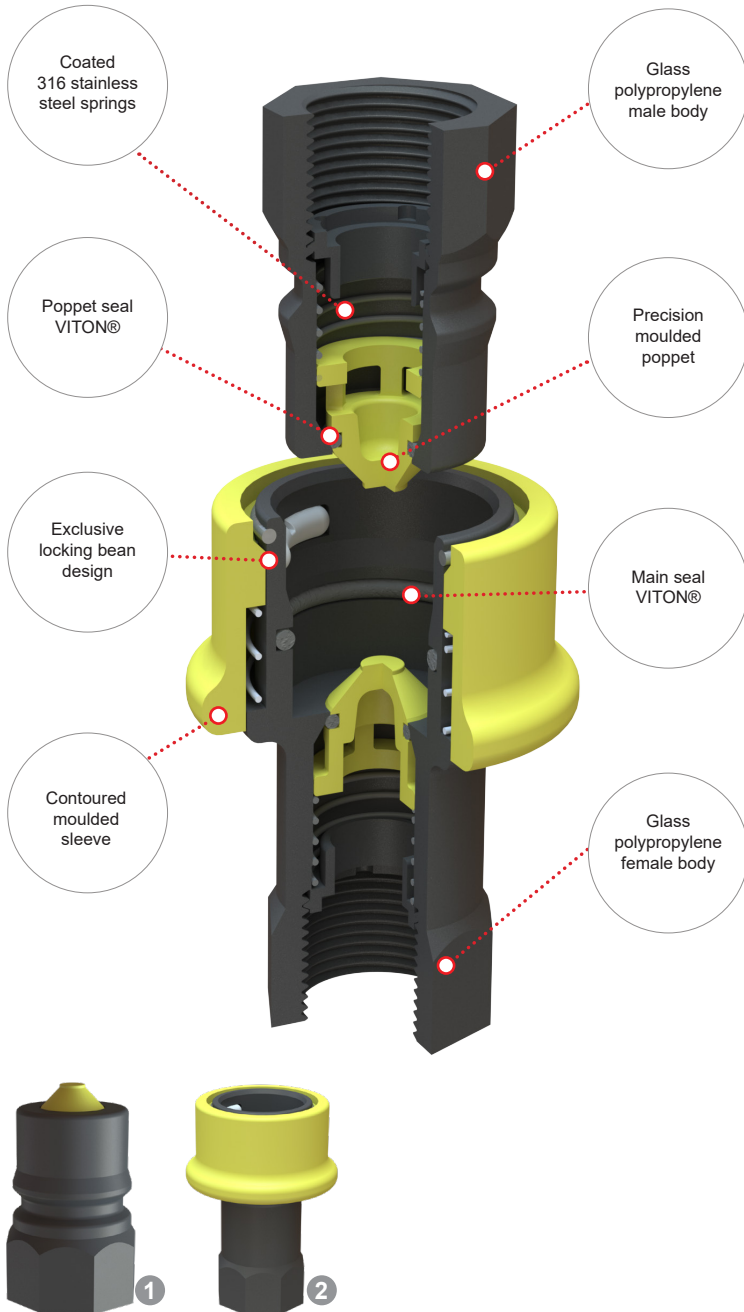

INTRODUCING DRY-SHUT FROM CPP

The Dry-Shut from **CPP** is a precision moulded minimum spill coupling for **low pressure liquid transfer**.

On disconnection the poppets automatic close and shut off the liquid flow, resulting in minimal residual loss or air inclusion. This simple ISO "B" type operation makes it easy to handle with no levers or switches to operate. Our Dry-Shut couplings are ISO 7241-1 series B (ISO-B) interchangeable.

TECH SPEC

Max working pressure: 100 psi (7bar)

Flow rate: 168 L/min (45 USG/pm)

Compatible: ISO 7241-1 (ISO B)



	PART NUMBER	PRODUCT DESCRIPTION
1	DS10BMVF10BV027	1" Dry-Shut male valved adapter X 1" BSP female GPP. C/W Viton seals
2	DS10BFVF10BV027	1" Dry-Shut female valved coupler X 1" BSP female G/P/P. C/W Viton seals

VITON® (registered trademark of DuPont Performance Elastomers L.L.C.) other seals available

✉ sales@cpp-usa.com

☎ US: +1-863-638-6335



<http://www.cpp-usa.com>

CPP-LM Ltd, C/O P.O BOX 3752 LAKE WALES, FLORIDA 33859 USA

CPP®

1" DRY-SHUT SYSTEM

STANDARD PARTS TO ADAPT IBC'S & HOSE CONNECTIONS



TECH SPEC

At **CPP®** we have developed a range of easy fit convertors, adaptors and fittings to complement our **DRY-SHUT** coupling system. They are precision moulded in our factory in the UK, all come with seals for a leak free connection.

Max working pressure: 100 psi (7bar)

Body Material: Polypropylene

O-rings: EPDM

Gaskets: Olefin elastomer



IBC CONVERTORS

	PART NUMBER	PRODUCT DESCRIPTION
1	HMFB10BP60UD027	1" BSP short male / o-ring x S60X6 female buttress C/W seal, G/P/P
2	HMFB10BP20M027	1" BSP short male / o-ring X 2" NPS female C/W seal, G/P/P
3	CFB2010PB027	2" Camlock Coupler x 1" BSP short male / o-ring, G/P/P
4	HMFB10BP100U0272	1" BSP short male / o-ring x S100X8 female Buttress C/W seal G/P/P
5	HMFPPB1078RD027	1" BSP male Short/o-ring x RD78 (DIN 11851) Female G/P/P



FITTINGS

	PART NUMBER	PRODUCT DESCRIPTION
1	CMF1010PB027	1" Part 'FS' 1" Camlock x 1" BSP Short Male C/W O-Ring G/P/P
2	DBMMPB20B10PB027	1" BSP short male / o-ring x BCS G2 x 11.5 (2" BSP/NPS) C/W o-ring
3	HMPB10T027	1" BSP short male / o-ring X 1" (25mm) hose tails G/P/P
4	HMPB10B075T027	1" BSP short male / o-ring X 3/4" (19mm) hose tails G/P/P
5	HMPB10B05T027	1" BSP short male / o-ring X 1/2" (13mm) hose tails G/P/P
6	HMMPB1010B027	1" BSP short male / o-ring X 1" BSPT Male G/P/P
7	HMMPB10075B027	1" BSP short male / o-ring X 3/4" BSPT Male G/P/P
8	HMMPB1005B027	1" BSP short male / o-ring X 1/2" BSPT Male G/P/P