

EAGLE



Protecting People, Property and the Planet. Since 1894

POLY DRUMS





POLY DRUMS

Eagle Manufacturing's ever-growing Poly Drum product line has handled both hazardous and non-hazardous storage needs for our customers for decades by offering Lab Packs, Overpacks, Open-Head and Salvage Drums. The 14-, 20-, 30- and 55-gallon lab packs and Open-Head Drums are available with plastic lids and a choice of metal or plastic rings. The 14-, 20-, 30-, 55-, 65- and 95-gallon Overpack and Salvage Drums are available with metal bands or screw-on lids. All models are constructed of chemical resistant, high-density polyethylene (HDPE) with UV inhibitors, and are durable and lightweight. Eagle products are made in the USA.



All Drums feature:

- Blow-molded HDPE construction
- Chemical & weather resistant
- HDPE incinerates completely
- United Nations (UN) Certified to HM-181
- Operating temperature range (-30° F to 130° F)
- Drop tested – max weight @ 0° F (48 hrs.)
- Approved for use with Packing Groups I, II and III
- UV Protection Package
- UL 94HB Flammability Rating
- Nestable for ideal storage (except model 1656)
- FDA 21 CFR 177.1520 Food Grade Quality
- Stack tested – three high at maximum weight capacity (24 hrs.)

Eagle Drums are ideal for:

- Safe storage, handling and transportation of hazardous materials
- Spill containment and cleanup of hazardous materials
- Spill kit containers
- Original shipping containers
- Biowaste disposal and incineration



Model 1656
55 Gallon



What do the UN/DOT Markings Mean?

UN markings on a drum indicate that the container has been tested to meet performance oriented packaging (POP) standards outlined by the US Department of Transportation (DOT) at 49 CFR 178.

A typical UN marking:

1H2/X300/S/05/USA/M4990

1 Indicates the kind of packaging – “1” means a drum.

H Indicates the material of construction – “H” means plastic.

2 Indicates the category of packaging – “2” means a removable head drum.

X Indicates the performance standard the package has successfully passed – “X” means meets Packing Group I, II & III. (Drop ht. of 6’)

300 Indicates the maximum gross mass in kilograms – “300” means 300 kilograms or (2.2x300) 660 lbs.

S Indicates that the package is intended for solids – “S” means solids.

05 Indicates the year of manufacture.

USA Indicates the country of manufacture.

M4990 Indicates the manufacturer or approval agency.

POLY DRUMS



HDPE

100% Recyclable



Model Numbers	1610	1610BLK	1610M	1610MB	1610MBLK	1652	1654	1623	1623BLK	1623M
Style	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack	Salvage Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum
Closure Type	Plastic Lever-Lock	Plastic Lever-Lock	Metal Lever-Lock	Metal Lever-Lock	Metal Lever-Lock	Plastic Lever-Lock	Metal Lever-Lock	Plastic Lever-Lock	Plastic Lever-Lock	Metal Lever-Lock
Inside Dimensions	Top: 13½"	Top: 13½"	Top: 13½"	Top: 13½"	Top: 13½"	Top: 19"	Top: 19"	Top: 15.375"	Top: 15.375"	Top: 15.375"
	Bottom: 12¾"	Bottom: 12¾"	Bottom: 12¾"	Bottom: 12¾"	Bottom: 12¾"	Bottom: 16⅝"	Bottom: 16⅝"	Bottom: 12⅞"	Bottom: 12⅞"	Bottom: 12⅞"
	Height: 25"	Height: 25"	Height: 25"	Height: 25"	Height: 25"	Height: 19"	Height: 19"	Height: 29⅞"	Height: 29⅞"	Height: 29⅞"
Outside Dimensions	Top: 15"	Top: 15"	Top: 15"	Top: 15"	Top: 15"	Top: 20⅞"	Top: 20⅞"	Top: 15.75"	Top: 15.75"	Top: 15.75"
	Bottom: 12¾"	Bottom: 12¾"	Bottom: 12¾"	Bottom: 12¾"	Bottom: 12¾"	Bottom: 16⅞"	Bottom: 16⅞"	Bottom: 13¼"	Bottom: 13¼"	Bottom: 13¼"
	Height: 26½"	Height: 26½"	Height: 26½"	Height: 26½"	Height: 26½"	Height: 20⅞"	Height: 20⅞"	Height: 30½"	Height: 30½"	Height: 30½"
Maximum Capacity	143 lbs. 65 kg.	143 lbs. 65 kg.	220 lbs. 100 kg.	220 lbs. 100 kg.	220 lbs. 100 kg.	88 lbs. 40 kg.	165 lbs. 75 kg.	220 lbs. 100 kg.	220 lbs. 100 kg.	220 lbs. 100 kg.
Total Capacity	14 gal. 52.2 l.	14 gal. 52.2 l.	14 gal. 52.2 l.	14 gal. 52.2 l.	14 gal. 52.2 l.	20 gal. 76 l.	20 gal. 76 l.	20 gal. 76 l.	20 gal. 76 l.	20 gal. 76 l.
Maximum Container Size (If used as an overpack drum)	5 gal.	5 gal.	5 gal.	5 gal.	5 gal.	5 gal.	5 gal.	5 gal.	5 gal.	5 gal.
Weight	9 lbs. 3.6 kg.	9 lbs. 3.6 kg.	10 lbs. 4.1 kg.	10 lbs. 4.1 kg.	10 lbs. 4.1 kg.	15 lbs. 5.85 kg.	16 lbs. 6.75 kg.	10.25 lbs. 4.65 kg.	10.25 lbs. 4.65 kg.	11.5 lbs. 5.2 kg.
Pallet Quantity	54	54	54	54	54	40	40	36	36	36
Truckload Quantity	1,188	1,188	1,188	1,188	1,188	1,000	1,000	864	864	864
UN/DOT Rating	1H2/X65/S 1H2/Y100/S	1H2/X65/S 1H2/Y100/S	1H2/X65/S 1H2/Y100/S	1H2/X65/S 1H2/Y100/S	1H2/X65/S 1H2/Y100/S	1H2/X40/S	1H2/X75/S	1H2/X75/S 1H2/Y100/S	1H2/X75/S 1H2/Y100/S	1H2/X75/S 1H2/Y100/S



Lab Packs/Open Head - for use with smaller non-damaged bottles, cans, carboys and 5-gallon pails of non-leaking hazardous materials - if leaking, must pack with sufficient sorbents for – NO FREE LIQUIDS.

Regulatory Compliance:
Lab Packs/Open Head: DOT 49 CFR 173.12 / Overpacks: DOT 49 CFR 173.25
Salvage Drums: DOT 49 CFR 173.3

Salvage Drums - for use with damaged or leaking containers of hazardous materials or used absorbent materials contaminated with a hazardous substance. Require "Salvage Drum" labeling and must pass a 3-PSI pressure test.

Overpacks - for use with larger non-damaged containers, cans and drums of non-leaking hazardous materials - if leaking, must pack with sufficient sorbents for – NO FREE LIQUIDS.

UN Markings: **UN 1H2/X340/S/96USA/M4990**
1- Type of Container (drum), H-material of construction (plastic), 2- Removable head/X-Testing performance (X=Groups I, II, & III), 340-Max. Wt. of Container (Kg)/S-solids/96 - Year of Manufacture, USA-State Authorization Mark/M - certification compliance, 4990 -Testing Agency number.



POLY DRUMS



BUNG LID / BOLT RING OPTIONS Available for 30 Gallon Eagle Models



HDPE
100% Recyclable



Model Numbers	1623MB	1623MBLK	1601	1601BLK	1601M	1601MB	1601MBLK	1602	1655	1655BLK
Style	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Salvage Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum
Closure Type	Metal Lever-Lock	Metal Lever-Lock	Plastic Lever-Lock	Plastic Lever-Lock	Metal Lever-Lock	Metal Lever-Lock	Metal Lever-Lock	Metal Lever-Lock	Plastic Lever-Lock	Plastic Lever-Lock
Inside Dimensions	Top: 15 1/8"	Top: 15 1/8"	Top: 19"	Top: 19"	Top: 19"	Top: 19"	Top: 19"	Top: 19"	Top: 22 7/8"	Top: 22 7/8"
	Bottom: 12 1/8"	Bottom: 12 1/8"	Bottom: 16 1/4"	Bottom: 16 1/4"	Bottom: 16 1/4"	Bottom: 16 1/4"	Bottom: 16 1/4"	Bottom: 16 1/4"	Bottom: 19"	Bottom: 19"
Outside Dimensions	Top: 15 3/4"	Top: 15 3/4"	Top: 21 1/8"	Top: 21 1/8"	Top: 21 1/8"	Top: 21 1/8"	Top: 21 1/8"	Top: 21 1/8"	Top: 23 3/4"	Top: 23 3/4"
	Bottom: 13 1/4"	Bottom: 13 1/4"	Bottom: 16 5/8"	Bottom: 16 5/8"	Bottom: 16 5/8"	Bottom: 16 5/8"	Bottom: 16 5/8"	Bottom: 16 5/8"	Bottom: 19 3/8"	Bottom: 19 3/8"
Maximum Capacity	220 lbs. 100 kg.	220 lbs. 100 kg.	220 lbs. 100 kg.	220 lbs. 100 kg.	396 lbs. 180 kg.	396 lbs. 180 kg.	396 lbs. 180 kg.	396 lbs. 180 kg.	220 lbs. 100 kg.	220 lbs. 100 kg.
Total Capacity	20 gal. 213.89 l.	20 gal. 213.89 l.	30 gal. 114 l.	30 gal. 114 l.	30 gal. 114 l.	30 gal. 114 l.	30 gal. 114 l.	30 gal. 114 l.	57 gal. 213.89 l.	57 gal. 213.89 l.
Maximum Container Size (If used as an overpack drum)	5 gal.	5 gal.	16 gal.	16 gal.	16 gal.	16 gal.	16 gal.	16 gal.	30 gal.	30 gal.
Weight	11.5 lbs. 5.7 kg.	11.5 lbs. 5.2 kg.	16 lbs. 6.3 kg.	18 lbs. 7.2 kg.	18 lbs. 7.2 kg.	18 lbs. 7.2 kg.	18 lbs. 7.2 kg.	18 lbs. 7.2 kg.	23.5 lbs. 10.7 kg.	23.5 lbs. 10.7 kg.
Pallet Quantity	36	36	40	40	40	40	40	40	36	36
Truckload Quantity	864	864	1,000	1,000	1,000	1,000	1,000	1,000	864	864
UN/DOT Rating	1H2/X75/S 1H2/Y100/S	1H2/X75/S 1H2/Y100/S	1H2/X100/S 1H2/Y100/S	1H2/X100/S 1H2/Y100/S	1H2/X120/S 1H2/Y180/S	1H2/X120/S 1H2/Y180/S	1H2/X120/S 1H2/Y180/S	1H2/X120/S 1H2/Y180/S	1H2/X100/S 1H2/Y100/S	1H2/X100/S 1H2/Y100/S

Benefits of Blow-Molded HDPE Drums

HDPE is a very high molecular weight material, designed for an optimum balance of density, molecular weight and molecular weight distribution, demonstrating maximum property advantages for large products that require high impact resistance. Some of these advantages include:

- Environmental stress crack resistance (ESCR)
- Impact strength – even a low temperature
- Flexural modulus – durability and resilience
- Chemical resistance – to wide range of chemicals
- Abrasion resistance – prevents gouging and scuffing
- Ultra violet (UV) protection – superior blending process

Lid Styles:

- Lids feature closed cell foam or silicone gaskets
- Lid closure instructions included in each drum
- Salvage Drums pass 3-PSI pressure test

BOLT BAND W/
REGULAR LID
AVAILABLE IN
12 & 16 GAUGE

BUNG LID

SCREW TOP

PLASTIC
LEVER-LOCK

METAL
LEVER-LOCK

METAL
BAND W/BOLT



POLY DRUMS



BUNG LID / BOLT RING OPTIONS Available for 55 Gallon Eagle Models



HDPE

100% Recyclable



Model Numbers	1655M	1655MB	1655MBLK	1656	1656BLK	1656M	1656MB	1656MBLK
Style	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Salvage Drum	Lab Pack	Lab Pack
Closure Type	Metal Lever-Lock	Metal Lever-Lock	Metal Lever-Lock	Plastic Lever-Lock	Plastic Lever-Lock	Metal Lever-Lock	Metal Lever-Lock	Metal Lever-Lock
Inside Dimensions	Top: Bottom: Height:	22 ⁷ / ₁₆ " 19" 38 ⁷ / ₁₆ "	22 ⁷ / ₁₆ " 19" 38 ⁷ / ₁₆ "	22 ⁷ / ₁₆ " 19" 38 ⁷ / ₁₆ "	20 ¹ / ₁₆ " 22 ⁷ / ₁₆ " 35 ¹³ / ₁₆ "	20 ¹ / ₁₆ " 22 ⁷ / ₁₆ " 35 ¹³ / ₁₆ "	20 ¹ / ₁₆ " 22 ⁷ / ₁₆ " 35 ¹³ / ₁₆ "	20 ¹ / ₁₆ " 22 ⁷ / ₁₆ " 35 ¹³ / ₁₆ "
	Top: Bottom: Height:	23 ³ / ₄ " 19 ³ / ₁₆ " 39 ¹ / ₁₆ "	23 ³ / ₄ " 19 ³ / ₁₆ " 39 ¹ / ₁₆ "	23 ³ / ₄ " 19 ³ / ₁₆ " 39 ¹ / ₁₆ "	21" 22 ¹ / ₂ " 36 ⁷ / ₁₆ "	21" 22 ¹ / ₂ " 36 ⁷ / ₁₆ "	21" 22 ¹ / ₂ " 36 ⁷ / ₁₆ "	21" 22 ¹ / ₂ " 36 ⁷ / ₁₆ "
	Top: Bottom: Height:	23 ³ / ₄ " 19 ³ / ₁₆ " 39 ¹ / ₁₆ "	23 ³ / ₄ " 19 ³ / ₁₆ " 39 ¹ / ₁₆ "	23 ³ / ₄ " 19 ³ / ₁₆ " 39 ¹ / ₁₆ "	21" 22 ¹ / ₂ " 36 ⁷ / ₁₆ "	21" 22 ¹ / ₂ " 36 ⁷ / ₁₆ "	21" 22 ¹ / ₂ " 36 ⁷ / ₁₆ "	21" 22 ¹ / ₂ " 36 ⁷ / ₁₆ "
Maximum Capacity	551 lbs. 250 kg.	551 lbs. 250 kg.	551 lbs. 250 kg.	220 lbs. 100 kg.	220 lbs. 100 kg.	551 lbs. 250 kg.	551 lbs. 250 kg.	551 lbs. 250 kg.
Total Capacity	55 gal. 213.89 l.	55 gal. 213.89 l.	55 gal. 213.89 l.	55 gal. 217.66 l.	55 gal. 217.66 l.	55 gal. 217.66 l.	55 gal. 217.66 l.	55 gal. 217.66 l.
Maximum Container Size (If used as an overpack drum)	30 gal.	30 gal.	30 gal.	30 gal.	30 gal.	30 gal.	30 gal.	30 gal.
Weight	23.5 lbs. 10.7 kg.	23.5 lbs. 10.7 kg.	23.5 lbs. 10.7 kg.	23.5 lbs. 10.7 kg.	23.5 lbs. 10.7 kg.	23.5 lbs. 10.7 kg.	23.5 lbs. 10.7 kg.	23.5 lbs. 10.7 kg.
Pallet Quantity	36	36	36	8	8	8	8	8
Truckload Quantity	864	864	864	336	336	336	336	336
UN/DOT Rating	1H2/X200/S 1H2/Y250/S	1H2/X200/S 1H2/Y250/S	1H2/X200/S 1H2/Y250/S	1H2/X100/S 1H2/Y100/S	1H2/X100/S 1H2/Y100/S	1H2/X200/S 1H2/Y250/S	1H2/X200/S 1H2/Y250/S	1H2/X200/S 1H2/Y250/S

Did you know?

Eagle HDPE poly drums with screw tops or plastic lever-lock lid closures can be incinerated completely.

Lab Packs/Open Head - for use with smaller non-damaged bottles, cans, carboys and 5-gallon pails of non-leaking hazardous materials - if leaking, must pack with sufficient sorbents for – NO FREE LIQUIDS.

Salvage Drums - for use with damaged or leaking containers of hazardous materials or used absorbent materials contaminated with a hazardous substance. Require "Salvage Drum" labeling and must pass a 3-PSI pressure test.

Overpacks - for use with larger non-damaged containers, cans and drums of non-leaking hazardous materials - if leaking, must pack with sufficient sorbents for – NO FREE LIQUIDS.

Regulatory Compliance:
Lab Packs/Open Head: DOT 49 CFR 173.12
Overpacks: DOT 49 CFR 173.25
Salvage Drums: DOT 49 CFR 173.3

POLY DRUMS



HDPE
100% Recyclable



Model Numbers	1650	1600SL	1657	1661	1665	1690	1695
Style	Lab Pack	Lab Pack	Lab Pack	Overpack	Salvage Drum	Overpack	Salvage Drum
Closure Type	Screw-on lid	Screw-on lid	Screw-on lid	Screw-on lid	Metal band w/bolt	Screw-on lid	Metal band w/bolt
Inside Dimensions	Top: 19 ^{3⁄8} ” Bottom: 16 ^{3⁄8} ” Height: 20”	Top: 19 ^{3⁄8} ” Bottom: 16 ^{3⁄4} ” Height: 27”	Top: 23 ^{3⁄8} ” Bottom: 19” Height: 39 ^{3⁄4} ”	Top: 27 ^{1⁄8} ” Bottom: 25 ^{15⁄16} ” Height: 31 ^{1⁄4} ”	Top: 27 ^{1⁄8} ” Bottom: 25 ^{1⁄2} ” Height: 35 ^{5⁄8} ”	Top: 27 ^{1⁄8} ” Bottom: 25 ^{3⁄16} ” Height: 39”	Top: 27 ^{1⁄8} ” Bottom: 25 ^{3⁄4} ” Height: 38”
Outside Dimensions	Top: 20 ^{3⁄8} ” Bottom: 16 ^{3⁄4} ” Height: 20 ^{3⁄4} ”	Top: 22 ^{1⁄2} ” Bottom: 16 ^{3⁄8} ” Height: 28 ^{3⁄4} ”	Top: 26 ^{1⁄2} ” Bottom: 19 ^{3⁄8} ” Height: 40”	Top: 31” Bottom: 26 ^{7⁄16} ” Height: 33 ^{3⁄4} ”	Top: 31” Bottom: 26” Height: 38 ^{5⁄8} ”	Top: 31” Bottom: 26 ^{3⁄16} ” Height: 41 ^{1⁄4} ”	Top: 31” Bottom: 25 ^{3⁄4} ” Height: 44 ^{1⁄4} ”
Maximum Capacity	125 lbs. 57 kg.	396 lbs. 180 kg.	551 lbs. 250 kg.	660 lbs. 300 kg.	440 lbs. 200 kg.	660 lbs. 300 kg.	748 lbs. 340 kg.
Total Capacity	20 gal. 76 l.	30 gal. 114 l.	55 gal. 114 l.	65 gal. 247 l.	65 gal. 247 l.	95 gal. 361 l.	95 gal. 361 l.
Maximum Container Size (If used as an overpack drum)	5 gal.	16 gal.	30 gal.	30 gal.	55 gal.	55 gal.	55 gal.
Weight	13 lbs. 5.85 kg.	18 lbs. 6.3 kg.	28 lbs. 6.3 kg.	45 lbs. 20.25 kg.	53 lbs. 23.85 kg.	50 lbs. 22.5 kg.	58 lbs. 26.1 kg.
Pallet Quantity	24	24	Pending	3	4	3	4
Truckload Quantity	528	720	Pending	180	192	180	192
UN/DOT Rating	1H2/X57/S	1H2/X120/S 1H2/Y180/S	1H2/X200/S 1H2/Y250/S	1H2/X300/S	1H2/X200/S	1H2/X300/S	1H2/X340/S



SCREW TOP



METAL BAND W/BOLT



UN Markings: UN 1H2/X340/S/96USA/M4990
1- Type of Container (drum), H-material of construction (plastic), 2-Removable head/X-Testing performance (X=Groups I, II, & III), 340-Max. Wt. of Container (Kg)/S-solids/96 - Year of Manufacture, USA-State Authorization Mark/M - certification compliance, 4990-Testing Agency number.

POLY DRUMS



		DRUM MODEL NUMBER	CAPACITY (GALLONS)	COLOR	LID WITH GASKET	BAND	UN DOT RATING/INSERT
1610 SERIES		1610	14	YELLOW	WHITE 14 GAL LID WITH GUSSETS GASKET	PLASTIC LEVER WITH DOWN LEG	X65/Y100
		1610M	14	YELLOW	WHITE 14 GAL LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X65/Y100
		1610MB	14	BLUE	WHITE 14 GAL LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X65/Y100
		1610MBLK	14	BLACK	WHITE 14 GAL LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X65/Y100
		1610BLK	14	BLACK	WHITE 14 GAL LID WITH GUSSETS GASKET	PLASTIC LEVER WITH DOWN LEG	X65/Y100
1623 SERIES		1623	20	YELLOW	WHITE 20 GAL DRUM COVER GASKET	PLASTIC LEVER WITH DOWN LEG	X75/Y100
		1623M	20	YELLOW	WHITE 20 GAL DRUM COVER GASKET	16 GAUGE METAL LEVER BAND	X75/Y100
		1623MB	20	BLUE	WHITE 20 GAL DRUM COVER GASKET	16 GAUGE METAL LEVER BAND	X75/Y100
		1623MBLK	20	BLACK	WHITE 20 GAL DRUM COVER GASKET	16 GAUGE METAL LEVER BAND	X75/Y100
		1623BLK	20	BLACK	WHITE 20 GAL DRUM COVER GASKET	PLASTIC LEVER WITH DOWN LEG	X75/Y100
1650 SERIES		1650	20	YELLOW	YELLOW SCREW ON LID W/ BLACK PRESS ON GASKET	NO BAND	X57
		1650BEI	20	BEIGE	BEIGE SCREW ON LID W/ BLACK PRESS ON GASKET	NO BAND	X57
		1652	20	YELLOW	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	PLASTIC LEVER WITH DOWN LEG	X40
		1654 (SALVAGE)	20	YELLOW	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X75
1600, 1601 & 1602 SERIES		1600SL	30	YELLOW	YELLOW SCREW ON LID W/ BLACK PRESS ON GASKET	NO BAND	X120/Y180
		1601	30	YELLOW	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	PLASTIC LEVER WITH DOWN LEG	X100/Y100
		1601M	30	YELLOW	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X120/Y180
		1601MB	30	BLUE	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X120/Y180
		1601MBBG	30	BLUE	WHITE 20/30 GAL HP BUNG LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X120/Y180
		1601MBLKBG	30	BLACK	WHITE 20/30 GAL HP BUNG LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X120/Y180
		1601BLKBG	30	BLACK	WHITE 20/30 GAL HP BUNG LID WITH GUSSETS GASKET	PLASTIC LEVER WITH DOWN LEG	X100/Y100
		1601MBBR	30	BLUE	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	16 GAUGE METAL BOLT RING	X120/Y180
		1601MBLK	30	BLACK	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X120/Y180
		1601BLK	30	BLACK	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET WITH GAP	PLASTIC LEVER WITH DOWN LEG	X100/Y100
		1602 (SALVAGE)	30	YELLOW	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X120/Y180
1655 SERIES		1655	55	YELLOW	WHITE 55 GAL HP COVER GASKET	PLASTIC LEVER WITH DOWN LEG	X100/Y100
		1655M	55	YELLOW	WHITE 55 GAL HP COVER GASKET	16 GAUGE METAL LEVER BAND	X200/Y250
		1655MB	55	BLUE	WHITE 55 GAL HP COVER GASKET	16 GAUGE METAL LEVER BAND	X200/Y250
		1655MBBG	55	BLUE	WHITE 55 GAL HP WITH BUNGS COVER GASKET	16 GAUGE METAL LEVER BAND	X200/Y250
		1655MBLKBG	55	BLACK	WHITE 55 GAL HP WITH BUNGS COVER GASKET	16 GAUGE METAL LEVER BAND	X200/Y250
		1655BLKBG	55	BLACK	WHITE 55 GAL HP WITH BUNGS COVER GASKET	PLASTIC LEVER WITH DOWN LEG	X100/Y100
		1655MBLKBR	55	BLACK	WHITE 55 GAL HP COVER GASKET	16 GAUGE METAL BOLT RING	X200/Y250
		1655MBBR	55	BLUE	WHITE 55 GAL HP COVER GASKET	16 GAUGE METAL BOLT RING	X200/Y250
		1655MBBR-12	55	BLUE	WHITE 55 GAL HP COVER GASKET	12 GAUGE METAL BOLT RING	X300
		1655MBLK	55	BLACK	WHITE 55 GAL HP COVER GASKET	16 GAUGE METAL LEVER BAND	X200/Y250
		1655BLK	55	BLACK	WHITE 55 GAL HP COVER GASKET w/GAP	PLASTIC LEVER WITH DOWN LEG	X100/Y100
1656 SERIES		1656	55	YELLOW	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	PLASTIC LEVER WITH DOWN LEG	X100/Y100
		1656M	55	YELLOW	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X200/Y250
		1656MB	55	BLUE	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X200/Y250
		1656MBLK	55	BLACK	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X200/Y250
		1656BLK	55	BLACK	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	PLASTIC LEVER WITH DOWN LEG	X100/Y100
		1656BLKBG	55	BLACK	WHITE 20/30 GAL HP BUNG LID WITH GUSSETS GASKET	PLASTIC LEVER WITH DOWN LEG	X100/Y100
		1656MBBG	55	BLUE	WHITE 20/30 GAL HP BUNG LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X200/Y250
		1656MBLKBG	55	BLACK	WHITE 20/30 GAL HP BUNG LID WITH GUSSETS GASKET	16 GAUGE METAL LEVER BAND	X200/Y250
		1656MBBR	55	BLUE	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	16 GAUGE METAL BOLT RING	X200/Y250
		1656MBBR-12	55	BLUE	WHITE 20/30 GAL HP LID WITH GUSSETS GASKET	12 GAUGE METAL BOLT RING	X300
1657 SERIES		1657	55	YELLOW	YELLOW SCREW ON LID W/ BLACK PRESS ON GASKET	NO BAND	X200/Y250
		1657BLK	55	BLACK	BLACK SCREW ON LID W/ BLACK PRESS ON GASKET	NO BAND	X200/Y250
1665 & 1695		1665 (SALVAGE)	65	YELLOW	1695 LID-YELLOW WITH GREY FILLED GASKET	12 GAUGE METAL BOLT RING	X200
		1695 (SALVAGE)	95	YELLOW	1695 LID-YELLOW WITH GREY FILLED GASKET	12 GAUGE METAL BOLT RING	X340
1661 & 1690		1661 (OVERPACK)	65	YELLOW	YELLOW SCREW ON LID W/ BLACK PRESS ON GASKET	NO BAND	X300
		1690 (OVERPACK)	95	YELLOW	YELLOW SCREW ON LID W/ BLACK PRESS ON GASKET	NO BAND	X300

OTHER EAGLE PRODUCTS



1632
2 Drum
Modular Platform



1640B
4 Drum
Containment Palette



1633
1 Drum Modular Platform



1613
Eagle Drum Bogie

1955
110 Gal. Eagle
Two Drum Vertical
Manual Close



UI-20-FS
UI-50-FS
Eagle Safety Cans

Spill Containment
Modular Platforms
(Easy to connect with
built-in U-channels)



1646RTC
4 Drum Rotary Top
Container Unit



1617Y
Drum Containment Dolly



1614
Drum Tray & Optional
1618
Drum Tray Dolly with 3" Casters
10 Gal. Capacity




1626
2 Drum Workstation
Low with Cover




Horizontal Drum
Stacking System

NEW PRODUCTS


T8001
Quik-Deploy™ SpillNEST™

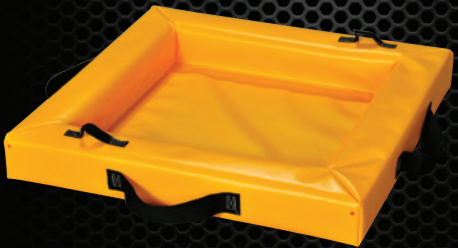

T8001FS
Folding Quik-Deploy™
SpillNEST™

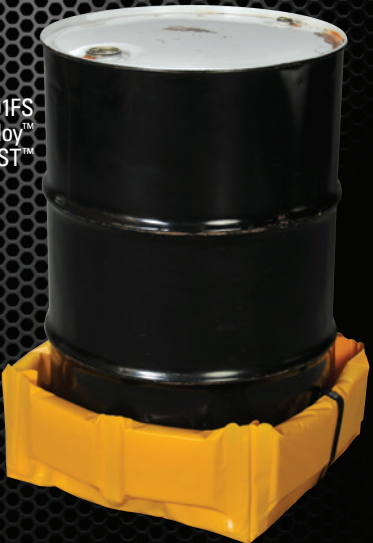

T8101
Eagle SpillNEST™

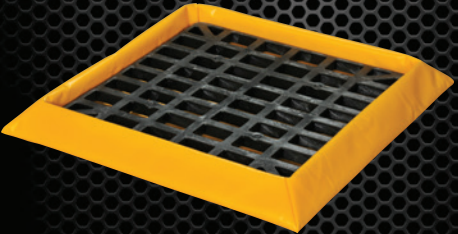

EAGLE



Protecting People, Property and the Planet.
Since 1894



Multiple Lid Styles & Rings



Variety of Drum Options



Eagle Manufacturing Company
2400 Charles Street • Wellsburg, WV 26070
P/ 304.737.3171 • F/ 304.737.1752
E/ sales@eagle-mfg.com