

# Gilbarco Veeder-Root Ergo™75 - 3/4" Retail Prepay Nozzle

## PERFORMANCE IN HAND



The Ergo™75 nozzle is part of the NEW Ergo™ Series fueling nozzles from Gilbarco Veeder-Root. Sleek. Streamlined. Comfortable. The lightest nozzle ever designed. Purpose-built for easy, one-handed, self service operation. Engineered with stronger materials, tested for 3 million tests cycles, offered with a 24-month warranty. And, above all the lowest pressure drop at 10GPM.

### Features

- **Certified** UL/ULC 2586 listed for gasoline, diesel, and up to 10% ethanol
- **Pressure Sensitive** nozzle specifically designed for self-service or card-lock systems with a no-pressure/no flow feature
- **Safe** unique attitude device feature provides automatic nozzle shut-off safety protection

### Easiest to Use

- **Ergonomic:** One-hand operation via hold open clip and, low engagement force and weight
- **One-finger** hold open clip for an easy true one-handed operation by any user
- **ADA compliant** with lower lever force required to engage nozzle

### Other Features

- 2-piece scuff guard for easy replacement
- Splash guard included
- Mates with all 5/8" and 3/4" hoses
- No "remove by date"
- Complimentary splash shield included with all nozzles
- Design working pressure: 50PSI (3.45bar) maximum pressure
- Available in NPT, BSPP and BSPT threads

### Designed for Durability



- **Cycle Tested** beyond 3 million cycles
- **Stronger Materials** to extend life of internal moving components
- **Reinforced** stainless steel spout tip and vac-port sensing tip
- **Climate Ready** for extreme cold (-40F) and hot (125F) temperatures
- **Industry-leading** 24-month warranty

### Better Flow Performance

- **Lowest pressure** drop at 10GPM to sustain higher flow rates
- **Dual Poppet** for superior flow control to easily regulate low-flow and accurate gasoline dispensing

### Ordering Specifications

| Model #  | Description  |
|----------|--|
| ER75AGA2 | Unleaded Spout - gasoline, up to 10% ethanol With 2 - Step Hold-Open Device - 3/4" NPT |
| ER75ADA2 | Leaded Spout - auto-diesel With 2 - Step Hold-Open Device - 3/4" NPT                   |

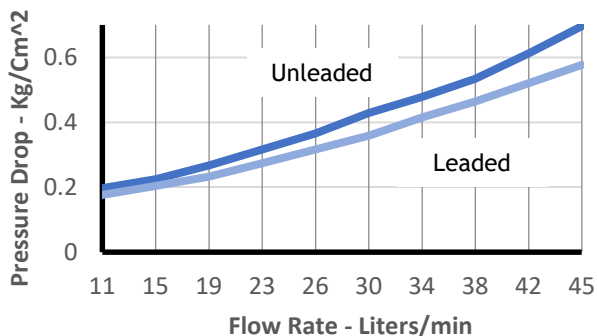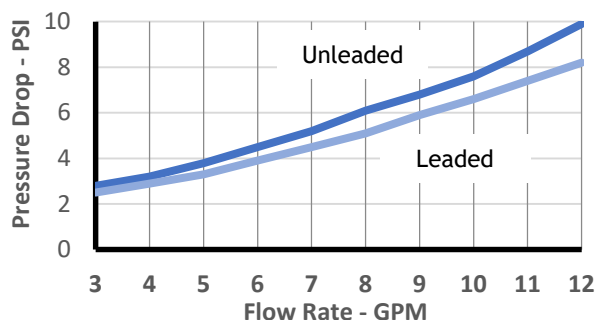

Scuff guard available in the following Pantone colors:

- Red - 200C
- Blue - 286 C
- Black - Black C
- Yellow - 128C
- Green - 348C
- Orange - 144C

\*Other colors available upon request with minimum quantities

| Construction       |   |
|--------------------|---|
| Inlet/Body         | 3/4" Single Body, Sand Cast Aluminum    |
| Seals and O-rings  | Fluorocarbon                            |
| Lever/Handguard    | Super Tuff Glass Filled Nylon           |
| Spout              | Stainless Steel Tip Reinforced Aluminum |
| Unleaded gas Spout | 13/16" OD                               |
| Auto Diesel Spout  | 15/16" OD                               |
| Weight             | 2.15lbs                                 |

### Listings and Certifications



WARNING: Cancer and Reproductive Harm  
www.P65Warnings.ca.gov

