
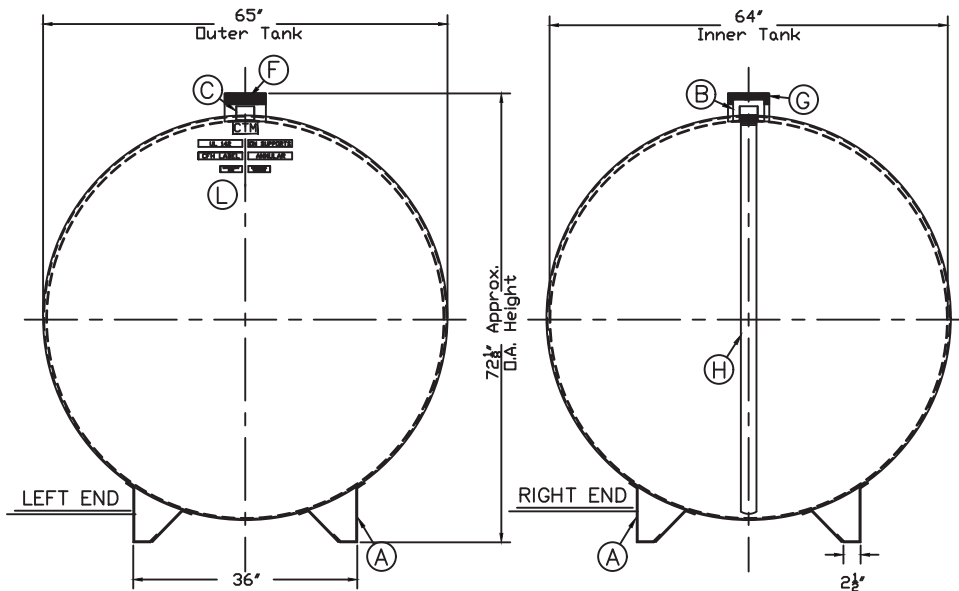


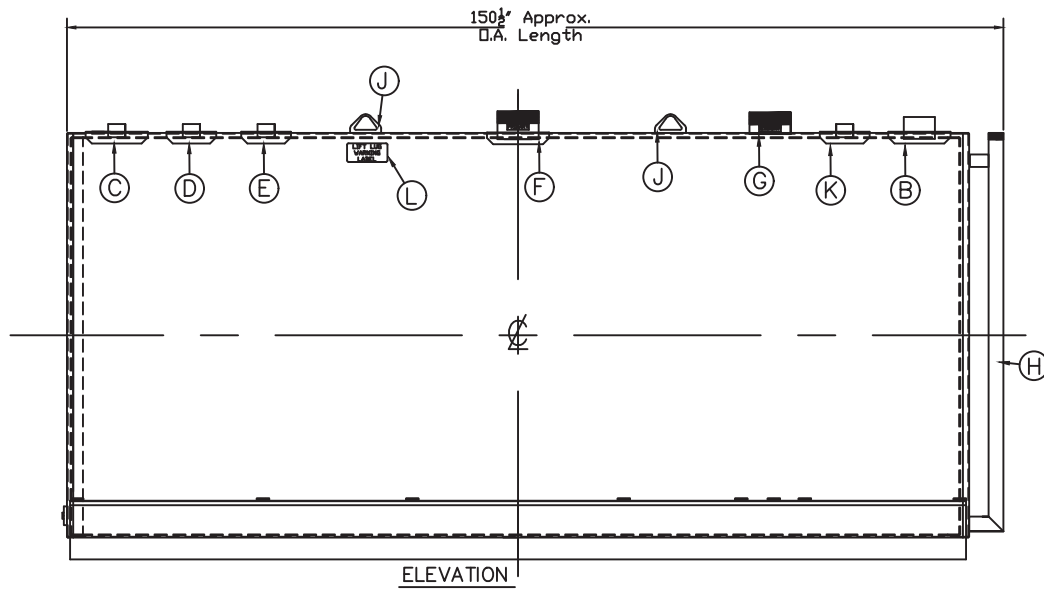

SCALE

MATERIAL DESCRIPTION

MODEL	KEY	QTY	HORIZONTAL DW UL 142 SKID TANK
Outer Diameter			5'-5"
Outer Length			12'-3"
Capacity			2,000 US Gallons Nominal
Inner Gauge			Per UL 142- 7 Gauge
Outer Gauge			Per UL 142 - 10 Gauge
Code			UL 142
Supports	A	4	Skids Full Length - 7 Gauge
Fill Opening	B	1	4" 150# Full Coupling W/Repad
Pump Opening	C	1	2" 150# Full Coupling W/Repad
Gauge Opening	D	1	2" 150# Full Coupling W/Repad
Op Vent Opening	E	1	2" 150# Full Coupling W/Repad
E-Vent Opening	F	1	6" Sch40 Nipple (Inner E-Vent) W/Repad
E-Vent Opening	G	1	6" Sch40 Nipple (Outer E-Vent)
Leak Monitor	H	1	2" Monitor Pipe (MNPT)
Lift Lug	J	2	Small Lift Lug
Remote Ga. opening	K	1	2" 150# Full Coupling W/Repad
STI Labeling	L	Set	Labeled Per UL 142

TANK SHALL BE BUILT & LABELED PER UL 142 STANDARD FOR STEEL ABOVEGROUND TANKS FOR FLAMMABLE AND COMBUSTIBLE LIQUIDS
UL FILE # MH5668

Surface Prep: Brush Blast
Paint: Polane White
Testing: Per UL 142
Operating Pressure: Atmospheric
Estimated Dry Weight: 3,750lbs