


# Pneumatic Diaphragm Pump


P75BY - 3" / 75mm Ball Valve




**Yellow Series**  
General Purpose  
Nylon Body- Hytrel Elastomers  
ATEX M2 Rating

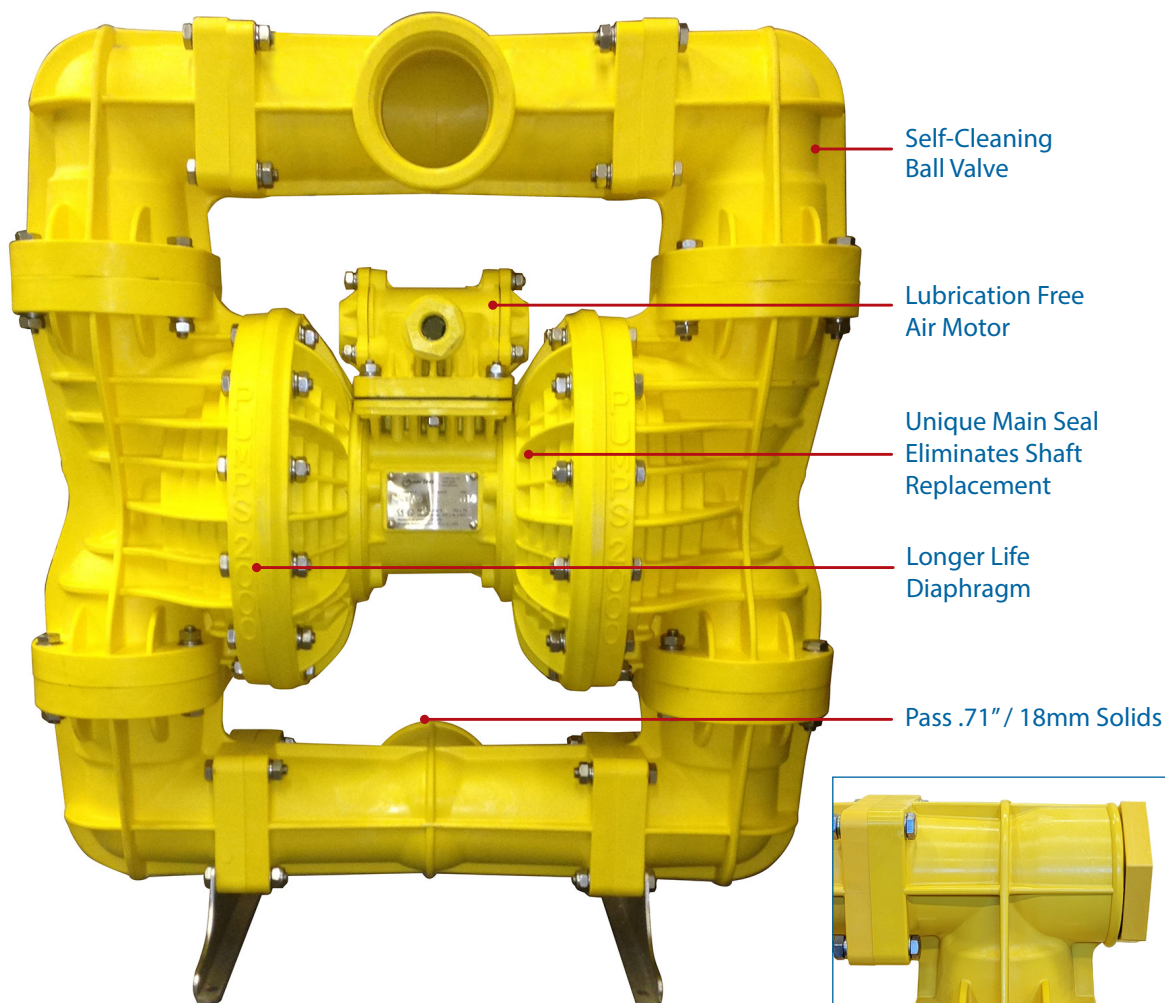

Optional Side Port



**Red Series - P75BR**  
FRAS (Fire Retardant Antistatic) Nylon Body- Hytrel Elastomers- For Explosive Environment- ATEX M1 Rating



**Blue Series - P75BB**  
Polypropylene Body- Santoprene Elastomers- For Acids, Caustics, Chemicals- ATEX M2 Rating

*Other materials are available to suit your specific application*


## Features

- > Patented design components
- > Simple design with fewer wear parts
- > Large particle handling
- > Low air consumption
- > Lightweight
- > Rugged & impact resistant
- > Lubrication free
- > No end of life – can always be repaired
- > ATEX M1 and M2 certified
- > Low noise levels

## Benefits

- > Increased productivity
- > Reduced costs – pays for itself
- > Increased reliability & longer life
- > Less downtime & maintenance
- > Easier to diagnose & repair
- > Save on energy costs – more air available for other equipment
- > Fewer injuries
- > No pollutants (oil free)
- > Safe for hazardous environments


## P75BY - 3" / 75mm Ball Valve

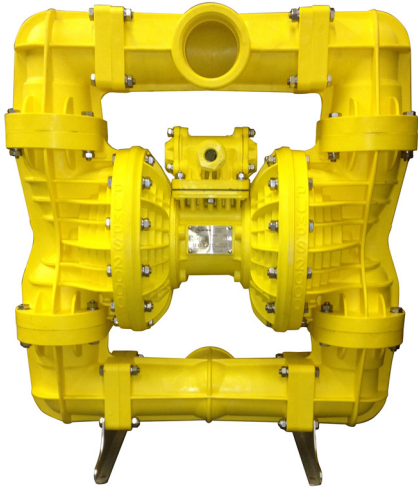

### Ball Valve

"Pumps 2000" pneumatic diaphragm pumps were specifically designed for harsh mining duties to outperform and outlast the competition due to a number of patented design features. The light weight feature provides ease of mobility and reduces the risk of injury. Low air consumption and long lasting lubrication free parts means low cost running and reduced maintenance. ***Ideally suited for pumping applications in all industries.***

## Performance Curve

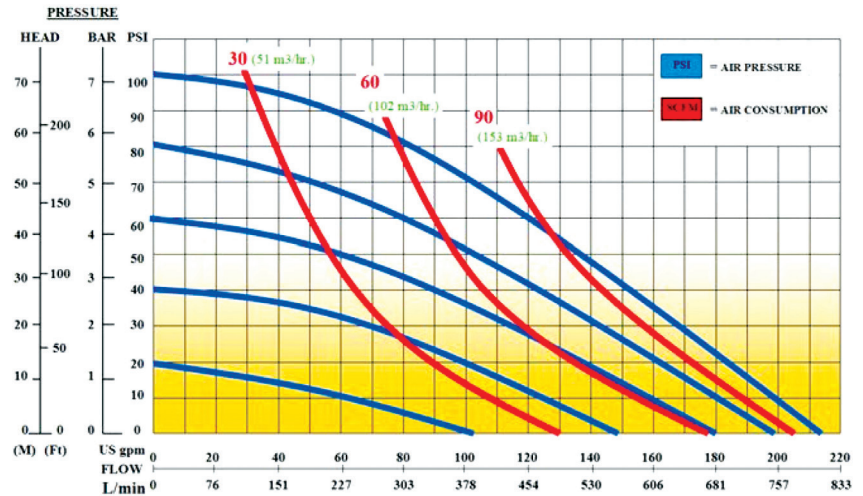

AIR PRESSURE: Tested at 100 psi / 690 kPa  
(not to exceed 125 psi / 861 kPa)

FLOW RATE: 0-213 gpm / 806 Lpm

FLUID CONNECTION: 3" / 75mm (Internal Thread)

AIR INLET PORT: 1/2" / 15mm (Internal Thread)

EXHAUST PORT: 3/4" / 19mm (Internal Thread)

DELIVERY PRESSURE: Tested to 87 psi / 600 kPa

SUCTION LIFT: Tested to 19' / 6m dry and 31' / 9m wet

SOLIDS HANDLING: .71" / 18mm

PUMP WEIGHT: Yellow Series – 65 lbs / 29kg  
Red (FRAS) Series – 75 lbs / 34kg  
Blue Series – 57 lbs / 26kg



John M. Ellsworth Co., Inc.

P.O. Box 240072  
8700 West Bradley Road  
Milwaukee, WI 53224

800-333-3331 **PHONE**

info@jmesales.com **E-MAIL**  
www.JMESales.com **WEB**