
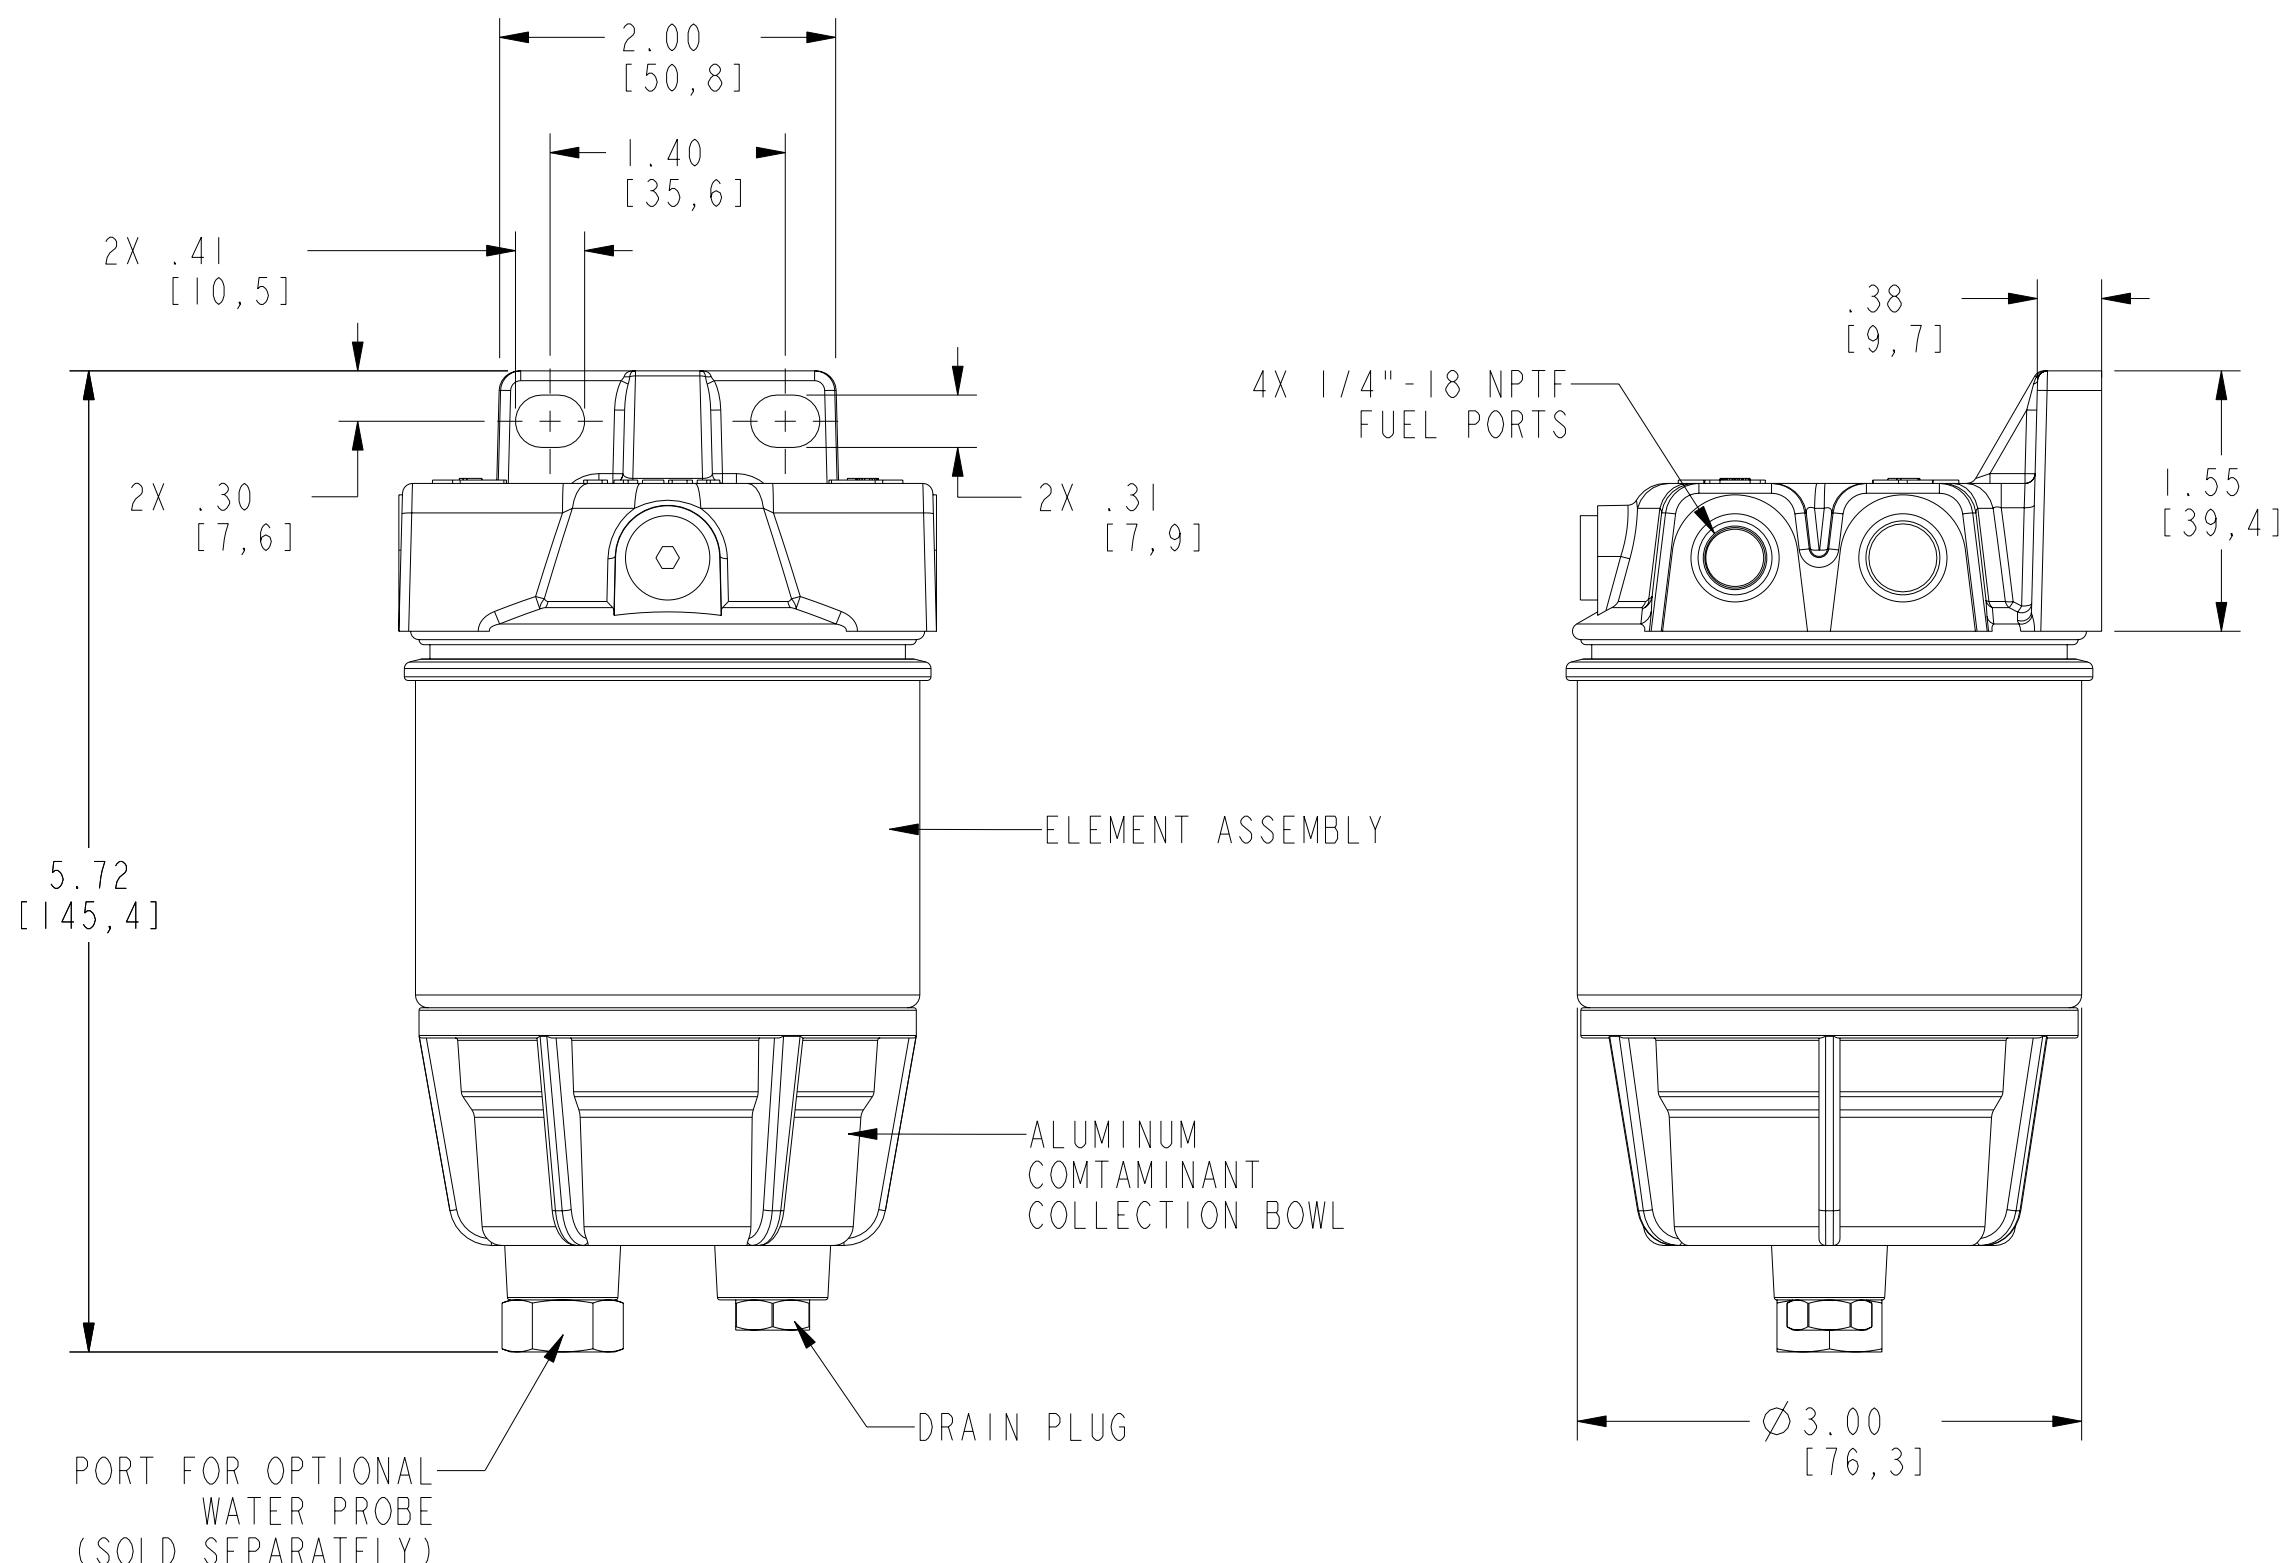
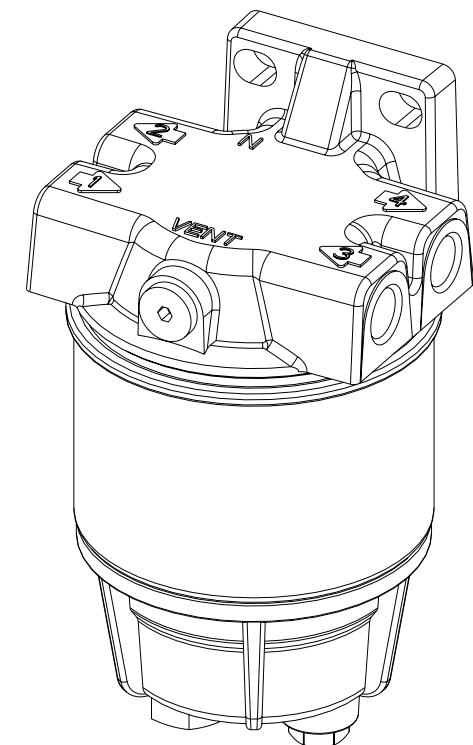


REVISIONS					
LTR	DESCRIPTION	E.N.	DATE	DRN	CHK
-	DRAWING RELEASE	19687	101107	CEV	RH

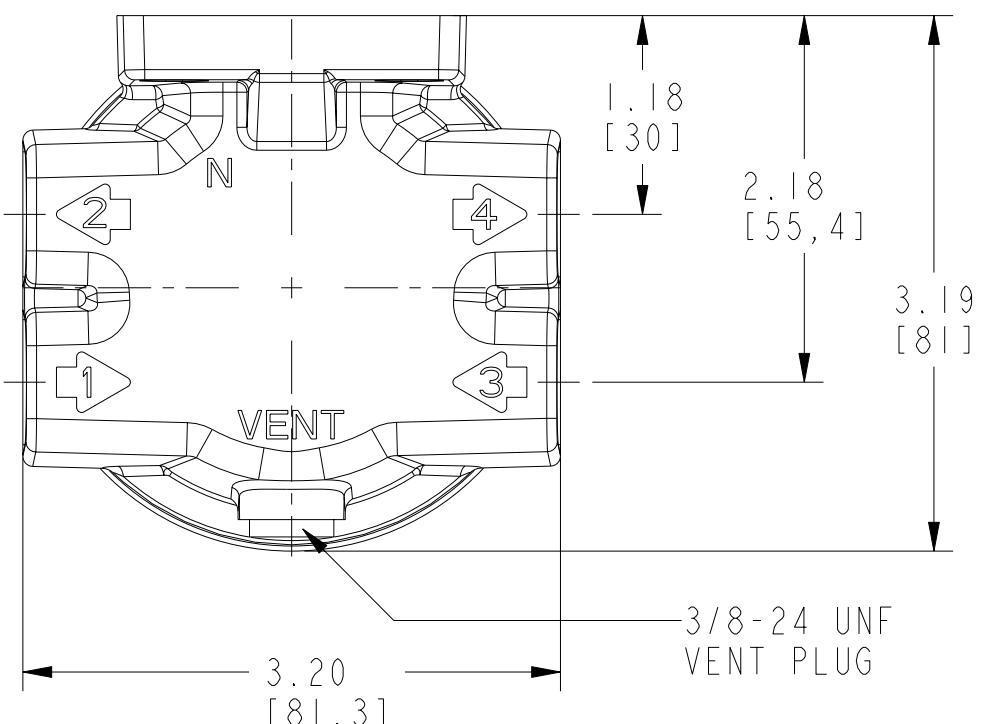

NOTE: BOWL ORIENTATION MAY VARY

NOTES: UNLESS OTHERWISE SPECIFIED-

1. DIMENSIONS GIVEN REPRESENT NOMINAL VALUES AND ARE FOR REFERENCE ONLY.
DIMENSIONING SCHEME: INCHES [MM]
2. SPECIFICATIONS:
 - A. APPLICATION: GASOLINE (OR DIESEL), VACUUM SIDE
 - B. MAXIMUM ALLOWABLE PRESSURE: 7 PSI / 48 kPa
 - C. MAXIMUM FLOW RATE: : 30 GPH / 114 LPH
 - D. FUEL PORT THREADS: 1/4-18 NPTF
 - E. BOWL WATER CAPACITY: 1.8 OZ. [53 ML]
 - F. ALLOW AT LEAST 2 INCHES [51 MM] UNDER UNITS FOR SERVICE.
3. SERVICE PARTS:
ELEMENT: S3240UL (10 MICRON)
MOUNTING HEAD: RK10214-01
BOWL: RK10553
4. PACKAGING:
STANDARD PACKAGING IS A CASE QUANTITY OF SIX.

CUSTOMER INTERFACE DRAWING

REVISE ONLY ON ProE SYSTEM	DRAWN C. VAN DYKE	DATE 101107	RACOR PARKER HANNIFIN CORPORATION RACOR DIVISION P.O. BOX 3208 MODESTO, CA 95353
THIS PRINT SUPERSEDES ANY EARLIER DATE; DESTROY SAME	CHECK R. HAMILTON	101107	
THIS PRINT AND ALL INFORMATION THEREIN IS OUR PROPERTY. IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED BY US. THIS PRINT IS SUBJECT TO RETURN ON DEMAND.	MATERIAL:	DESIGN	
		---	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES
			TOLERANCES
			DECIMAL ANGULAR
			.XX= ± ±
			.XXX= ± FRACTIONAL
			±
NEXT ASSY	FIRST USED ON	FINISH:	DO NOT SCALE DRAWING
		---	SCALE 0.875
APPLICATION			RELEASE DATE 101107
			SHEET 1 OF 1